

SFMX SERIES

(1,27 mm) .050"

FLEX LOCK/LATCH SOCKET STRIP

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SFMX

Insulator Material: Black Liquid Crystal Polymer
Contact Material: Phosphor Bronze
Plating: Au over 50µ" (1,27 µm) Ni

Operating Temp Range: -55°C to +125°C

Contact Resistance: 15 mΩ

Insertion Depth: (3,05 mm) .120" to (4,06 mm) .160"

Insertion Force: (Single contact only) 2.5 oz (0,69 N) avg.

Withdrawal Force: (Single contact only) 2.0 oz (0,57 N) avg.

Unmating Force: Withdrawal force per contact: 2.0 oz (0,57 N) avg; Incremental unmating force with latching mechanism: 10 & 15 pins/row (One Latch) increases withdrawal force by 4 x avg; 20-30 pins/row (Two Latches) increases withdrawal force by 3 x avg; 35-50 pins/row (Three Latches) increases withdrawal force by 1.7 x avg

RoHS Compliant: Yes
Processing: Lead-Free Solderable: Yes


SMT Lead Coplanarity: (0,10 mm) .004" max (10-25) (0,15 mm) .006" max (30-50)

Mates with: TFML



Latching feature increases withdrawal force



Polyimide film pick-and-place pad available

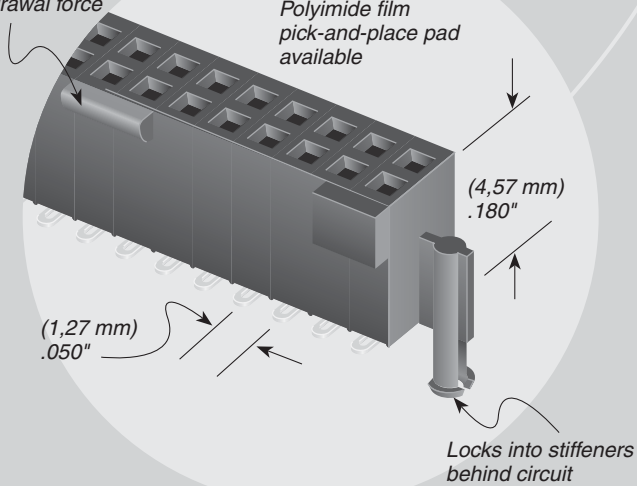

TYPE STRIP	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION
SFMX = Latching Flex Lock		10, 15, 20, 25, 30, 35, 40, 45, 50 (Standard sizes)	-T2 = Tiger Eye™ LITE Contact	-S = 30µ" (0,76 µm) Gold on contact, Matte Tin on tail		-K = (4,00 mm) .157" DIA Polyimide film Pick & Place Pad -TR = Tape & Reel

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

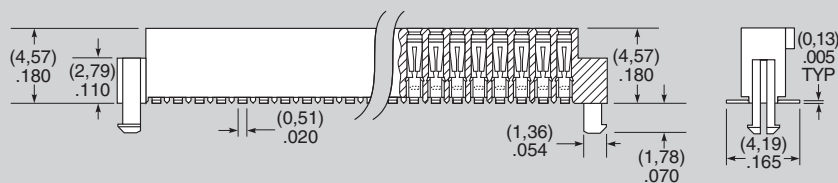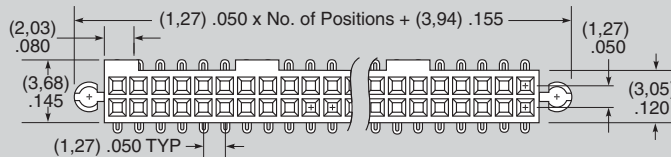

Note: Some sizes, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#) [68002-116](#)