





(2,54mm) .100"

DW, EW, ZW, HW SERIES


HW-14-08-G-S-400-100



ZW-06-10-G-T-450-230



DW-12-12-L-Q-400



# FLEXIBLE .025" SQ BOARD STACKERS

**Mates with:**

SSW, SSQ, ESW, ESQ, CES, SLW, BSW, BCS, SSM, IDSS, IDSD, HLE, PHF, SMSD, SMSS

**SPECIFICATIONS**

For complete specifications see [www.samtec.com?DW](http://www.samtec.com?DW), [www.samtec.com?EW](http://www.samtec.com?EW) or [www.samtec.com?ZW](http://www.samtec.com?ZW)

**DW, EW, ZW**

**Insulator Material:**

Black Glass  
Filled Polyester

**Terminal Material:**

Phosphor Bronze

**Plating:**

Au or Sn over  
50µ" (1,27µm) Ni

**Current Rating:**

3A @ 80°C ambient

**Operating Temp Range:**

-55°C to +125°C with Gold

-55°C to +105°C with Tin

**RoHS Compliant:**

Yes

**Lead-Free Solderable:**

Wave Only



**SPECIFICATIONS**

For complete specifications see [www.samtec.com?HW](http://www.samtec.com?HW)

**HW**

Same as ZW except:

**Insulator Material:**

Natural Liquid


Crystal Polymer

**RoHS Compliant:**

Yes

**Lead-Free Solderable:**

Yes

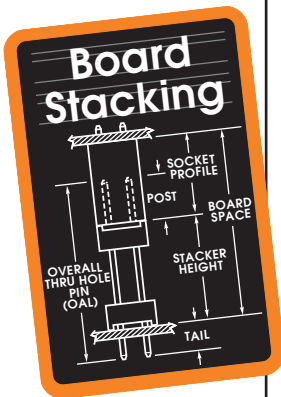

TYPE STRIP	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	OTHER OPTIONS																											
<b>DW</b> = (2,79mm) .110" Tail	<p><b>Specify LEAD STYLE from chart</b></p> <table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr><td>-07</td><td>(10,92) .430</td></tr> <tr><td>-08</td><td>(13,46) .530</td></tr> <tr><td>-09</td><td>(18,54) .730</td></tr> <tr><td>-10</td><td>(21,08) .830</td></tr> <tr><td>-11</td><td>(23,62) .930</td></tr> <tr><td>-12</td><td>(26,16) 1.030</td></tr> <tr><td>-13</td><td>(31,24) 1.230</td></tr> <tr><td>-14</td><td>(36,32) 1.430</td></tr> <tr><td>-15</td><td>(16,00) .630</td></tr> <tr><td>-16</td><td>(11,30) .445</td></tr> <tr><td>-17</td><td>(12,19) .480</td></tr> <tr><td>-19</td><td>(33,78) 1.330</td></tr> <tr><td>-20</td><td>(28,70) 1.130</td></tr> </tbody> </table>	LEAD STYLE	OAL	-07	(10,92) .430	-08	(13,46) .530	-09	(18,54) .730	-10	(21,08) .830	-11	(23,62) .930	-12	(26,16) 1.030	-13	(31,24) 1.230	-14	(36,32) 1.430	-15	(16,00) .630	-16	(11,30) .445	-17	(12,19) .480	-19	(33,78) 1.330	-20	(28,70) 1.130	<p><b>01 thru 50</b></p>	<p><b>-S</b> = Single Row</p> <p><b>-D</b> = Double Row</p> <p><b>-T</b> = Triple Row</p> <p><b>-Q</b> = Double Row .200" (5,08mm) row space</p>	<p><b>-XXX</b> = Stacker Height</p>	<p><b>-XXX</b> = ZW or HW Tail Length</p>
LEAD STYLE		OAL																															
-07		(10,92) .430																															
-08		(13,46) .530																															
-09		(18,54) .730																															
-10		(21,08) .830																															
-11		(23,62) .930																															
-12		(26,16) 1.030																															
-13		(31,24) 1.230																															
-14		(36,32) 1.430																															
-15		(16,00) .630																															
-16		(11,30) .445																															
-17		(12,19) .480																															
-19		(33,78) 1.330																															
-20		(28,70) 1.130																															
<b>EW</b> = (8,38mm) .330" Tail		<p><b>-F</b> = Gold flash on contact, Matte Tin on tail</p> <p><b>-L</b> = 10µ" (0,25µm) Gold on contact area of longer tail, Matte Tin on tail</p> <p><b>-G</b> = 10µ" (0,25µm) Gold on contact area of longer tail, Gold flash on balance</p> <p><b>-T</b> = Matte Tin</p>	<p><b>-LL</b> = Locking Lead (Shortest dimension between the tail and the post is the end that will be crimped. Available on tails from (2,29) .090" to (7,87) .310" only.) Single row, 01 &amp; 02 positions &amp; -Q row not available</p> <p><b>-XXX</b> = Polarized</p> <p>Specify omitted pin position</p>																														
<b>ZW</b> = Custom Tail				<p><b>-Q*</b> = Same as -T except middle row of pins missing.</p>																													
<b>HW</b> = High Temp Custom Tail																																	

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)