



Noise suppression sheets

Flexield





REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

- When mounting on live electrical parts directly, there is a fear that an insulation accident is caused, so please consider on the design in case of use.
- There is a fear that sullenness of double sided adhesive tape occurs, so please refrain from the use to a part where you wind repeatedly by which it's for the hinge part.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. When the damage occurs by having been used the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please understand that the responsibility cannot be taken.
 - (1) Aerospace/Aviation equipment
 - (2) Transportation equipment (cars, electric trains, ships, etc.)
 - (3) Medical equipment
 - (4) Power-generation control equipment
 - (5) Atomic energy-related equipment
 - (6) Seabed equipment
 - (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using these products in general purposes and standard use, it is recommended that protection circuits are used, devices are secured, and backup circuits are kept for increased safety.



Noise suppression sheets Flexield

Product compatible with RoHS directive Halogen-free

Overview of IFL series

FEATURES

- O High permeability items are lined up.
- Olt's also possible to load on a little gap because it's thin type.
- O Has flexibility, it does not crack by impact or the like.
- Olt excels in shape processability and can respond to various dimensions and shapes.
- Offer by a roll shape is possible.

APPLICATION

- O Electromagnetic noise measures of various kinds of electronic equipment
- O Receiver sensitivity improvement of PEN input (inductive coupling type)
- O Performance improvement of RFID (on metal correspondence)

STANDARD SHAPE LIST

Material	Thickness	Sheet	Roll			
	(mm)	dimensions (mm)	Width (mm)	Length (m)		
IFL10M	0.025 0.05 0.1 0.2	300×200	300	100		
IFL12	0.05 0.1 0.2	300×200	300	100		
IFL16	0.03 0.05 0.1	300×200	300	100		






- RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html
- O Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.




IFL series Sheet type

■ PART NUMBER CONSTRUCTION

IFL	10M	0	25		N		В	3	00	×	20	00
Series name	Material symbol	thic	ic material kness nm)		rface film nickness (mm)	th	e-sided tape ickness (mm)		ength mm)		Wid (m	
-	10M	025	0.025	N	No	N	No	300	300		200	200
	12	030	0.03	Р	0.016	В	0.01					
	16	050	0.05	R	0.038	D	0.03					
		100	0.10	R: Rele	ease type							
		200	0.20									

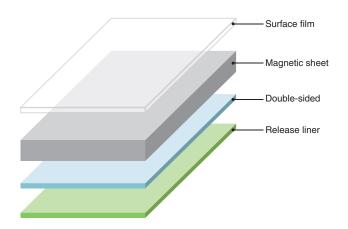

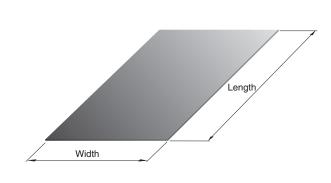

STANDARD PART NUMBER LIST

Material	Standard dimensionss (mm)	Thickness	Part number
IFL10M		0.025	IFL10M-025NB300×200
	300×200	0.05	IFL10M-050NB300×200
	300×200	0.1	IFL10M-100NB300×200
		0.2	IFL10M-200ND300×200
IFL12		0.05	IFL12-050NB300×200
	300×200	0.1	IFL12-100NB300×200
		0.2	IFL12-200ND300×200
IFL16		0.03	IFL16-030NB300X200
	300×200	0.05	IFL16-050NB300X200
		0.1	IFL16-100NB300X200







IFL series Roll type

■ PART NUMBER CONSTRUCTION


IFL	10M	0	25		R		N	11	HR	×	30	00
Series name	Material symbol	thic	ic material kness nm)		rface film nickness (mm)		e-sided tape ickness (mm)		ngth (m)			dth m)
	10M	025	0.025	N	No	N	No	1HR	100		300	300
	12	030	0.03	Р	0.016	В	0.01					
	16	050	0.05	R	0.038	D	0.03					
		100	0.10	R: Rele	ease type							

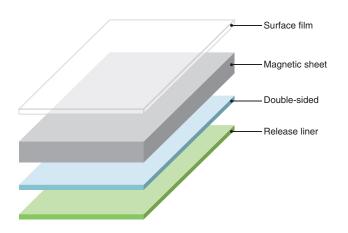

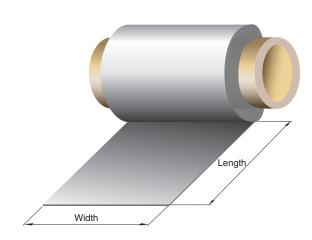

STANDARD PART NUMBER LIST

Material	Width	Length	Thickness	Part number			
	(mm)	(m)	(mm)				
			0.025	IFL10M-025RN1HRX300			
IFL10M 3	300	100	0.05	IFL10M-050RN1HRX300			
			0.1	IFL10M-100RN1HRX300			
IFL12	300) 100	0.05	IFL12-050RN1HRX300			
IFL12 300		100	0.1	IFL12-100RN1HRX300			
			0.03	IFL16-030RN1HRX300			
IFL16	300	100	0.05	IFL16-050RN1HRX300			
			0.1	IFL16-100RN1HRX300			

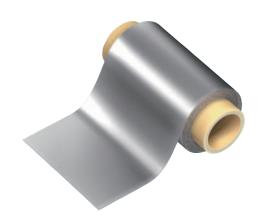




IFL series

■ MATERIAL CHARACTERISTIC

MATERIAL CHARACTERISTIC SPECIFICATION TABLE

Material name	Recommended	Relative permeability	Surface resistivity	Thermal conductivity	Operating temperature range
	frequency range	(at 1MHz)	(Ω/sq.)min	(W/m ⋅ K)	(°C)
IFL10M	10 MHz to 3 GHz	120	1M	1.5	-40 to +85
IFL12	5 MHz to 3 GHz	180	10k	1.5	-40 to +85
IFL16	0.5 MHz to 1 GHz	220	10k	1.5	-40 to +85

□ RELATIVE PERMEABILITY

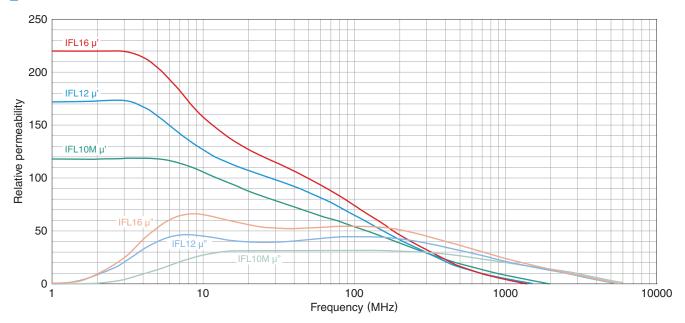


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.





IFL series

■ MATERIAL CHARACTERISTIC


■ NEIGHBORHOOD MAGNETIC FIELD ATTENUATION

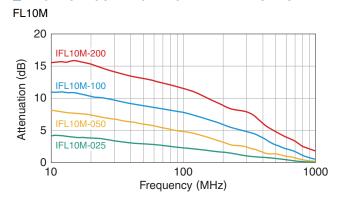

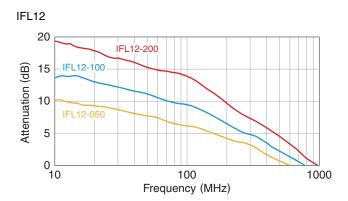

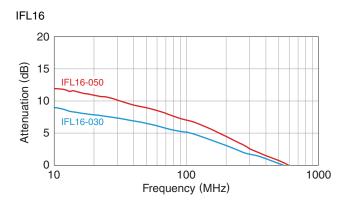

□ NEIGHBORHOOD MAGNETIC FIELD ATTENUATION TESTING METHOD (Magnetic field measurement on the microstrip line)

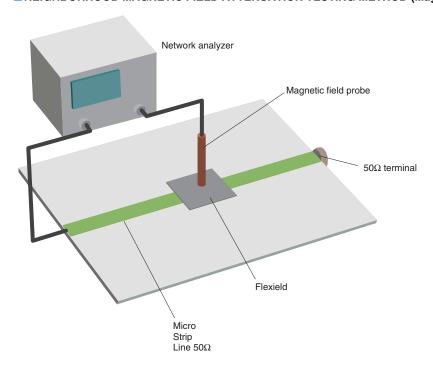


Mease be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.




IFL series

■ MATERIAL CHARACTERISTIC


□TRANSMISSION ATTENUATION

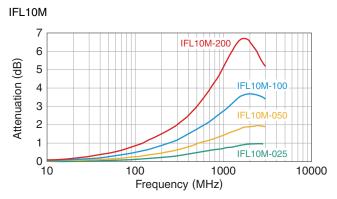

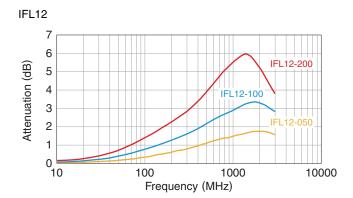




IFL16

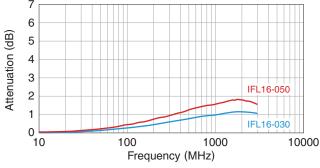

☐ TRANSMISSION ATTENUATION TESTING METHOD (Transmission measurement in a coaxial track)

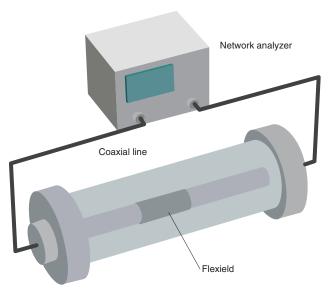

Mease be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EMI Gaskets, Sheets, Absorbers & Shielding category:

Click to view products by TDK manufacturer:

Other Similar products are found below:

23-76FSC-SN-24 2-1616323-1 4-1616259-0 3013350A 46J8501020.NN00 3013310A 3013325A 3013308A 3020604 55005106 3021302 3031313 67SLH050050025PI00 3021310 0137131400 6-34UT-070-BD-16 303076048 46J5N03020.NN00 30206025 260737 30395641 3030403 3690103020 HNY-LT15CU4241 46X7503020.NN00 46X7501020.NN00 46W5E02520.NN00 46W5E01520.NN00 302095032 30207032 30210005 46J5N02520.NN00 3021213 3020804 3021004 74273711 74273704 33403 3031210 3031008 3031004 3030903 30308055 303076016 303045018 303035015 3029564 3025602 3023502 3022303