


PCIE-1840

PCIE-1840L

4-ch 16Bit 125 MS/s Digitizer

4-ch 16Bit 80 MS/s Digitizer

NEW

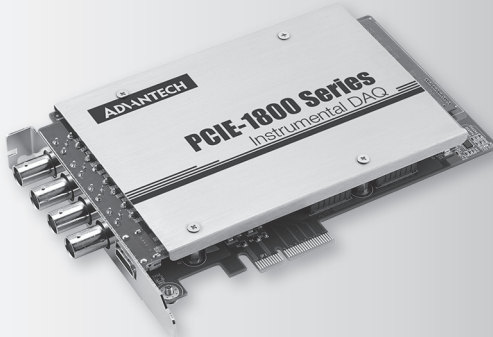

Features

- PCIE-1840
 - 4 simultaneous analog inputs, up to 125MHz, 16-bit resolution
 - 500MHz Time Interleaved Sampling
- PCIE-1840L
 - 4 simultaneous analog inputs, up to 80MHz, 16-bit resolution
 - 320MHz Time Interleaved Sampling
- Non-stop data streaming capable
- 2 GB on-board memory
- 1M or 50 Ohm selectable input impedance
- On-Board tunable anti-aliasing filter
- AC/DC Coupling

Introduction

The PCIE-1840 16-bit resolution digitizer divides the input voltage range into 65,536 different digitization levels, it also features sampling rates up to 125M Samples per second, and can be combined into 1 or 2 digitizing channels up to 250 MSPS or 500 MSPS, deep onboard sample memory up to 2 GB, and true ENOBs up to 11.4 bits

Specifications

Analog Input

- **Channels** 4 single-ended, simultaneously
- **Resolution** 16 bits
- **Max. Sampling Rate** 125 MS/s (PCIE-1840)
80 MS/s (PCIE-1840L)
- **Memory Size** 2GB
- **Over Voltage Protection** 30 V_{p-p}
- **Input Impedance** 50 Ω / 1M Ω
For 1 MΩ: AC Coupling /DC Coupling
- **Sampling Modes** Software and external clock
- **Trigger Modes** Start trigger, Delay to Start trigger
Stop trigger, Delay to Stop trigger
- **Input Range** 0.2 / 0.4 / 1 / 2 / 4 / 10 /
20 V_{pp} (input Impedance must be 1 MΩ)
- **Time Interleaved Sampling**
 - 4 channels combined,
500 MPS max. (PCIE-1840)
320 MPS max. (PCIE-1840L)
 - 2 channels combined,
250 MPS max. (PCIE-1840)
160 MPS max. (PCIE-1840L)
 - Configured automatically by setting sampling rate


General

- **Bus Type** PCI Express GEN2 x 4
- **I/O Connectors** 4 x BNC connector (for AI)
1 x HDMI connector (for Ext. clock and trigger)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Under test
- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCIE-1840-AE** 4-ch 16Bit 125 MS/s Digitizer
- **PCIE-1840L-AE** 4-ch 16Bit 80 MS/s Digitizer
- **PCLD-8840-AE** 20-pin DIN-rail HDMI Cable Wiring Board for PCIE-1802 and PCIE-1840
- **PCL-10119-1E** HDMI Cable
- **PCL-1010B-1E** BNC Coax Cable, 1m

Pin Assignments

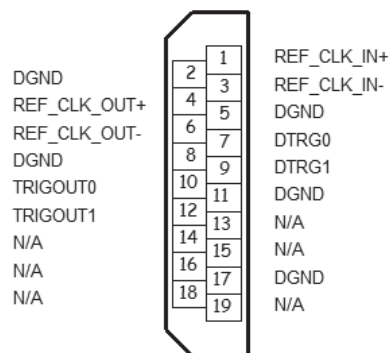

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)