


**HIGH REPEATABILITY,  
DC-8 GHz/20Gbps  
TO-5 RELAYS, DPDT**



SERIES	RELAY TYPE
SGRF312	Repeatable, Surface-Mount J-Lead RF relay
SGRF332	Low Power Operating Coil, Surface-Mount J-Lead RF relay

**DESCRIPTION**

The ultra miniature SGRF312 is designed to improve upon the SGRF300/SGRF303 relay's high frequency performance. The SGRF312/SGRF332 offers monotonic insertion loss to 8 GHz. This improvement in RF insertion loss over the frequency range, makes these relays highly suitable for use in attenuator and other RF circuits. The sensitive SGRF332 relay has a high resistance coil, thus requiring extremely low operating power (200 mW typical).

- High repeatability.
- Broader bandwidth.
- Metal enclosure for EMI shielding.
- Ground pin option to improve case grounding.
- High isolation between control and signal paths.
- Highly resistant to ESD.


**CONSTRUCTION FEATURES**

The following unique construction features and manufacturing techniques provide excellent resistance to environmental extremes and overall high reliability.

- Uni-frame motor design provides high magnetic efficiency and mechanical rigidity.
- Minimum mass components and welded construction provide maximum resistance to shock and vibration.
- Advanced cleaning techniques provide maximum assurance of internal cleanliness.
- Gold-plated precious metal alloy contacts ensure reliable switching.
- Hermetically sealed.

ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS		
<b>Temperature</b> (Ambient)	<b>Storage</b>	-65°C to +125°C
	<b>Operating</b>	-55°C to +85°C
<b>Vibration</b> (General Note I)		10 g's to 500 Hz
<b>Shock</b> (General Note I)		30 g's, 6ms half sine
<b>Enclosure</b>		Hermetically sealed
<b>Weight</b>		0.09 oz. (2.55g) max.

**SERIES SGRF312/SGRF332**  
**TYPICAL RF CHARACTERISTICS (See RF Notes)**

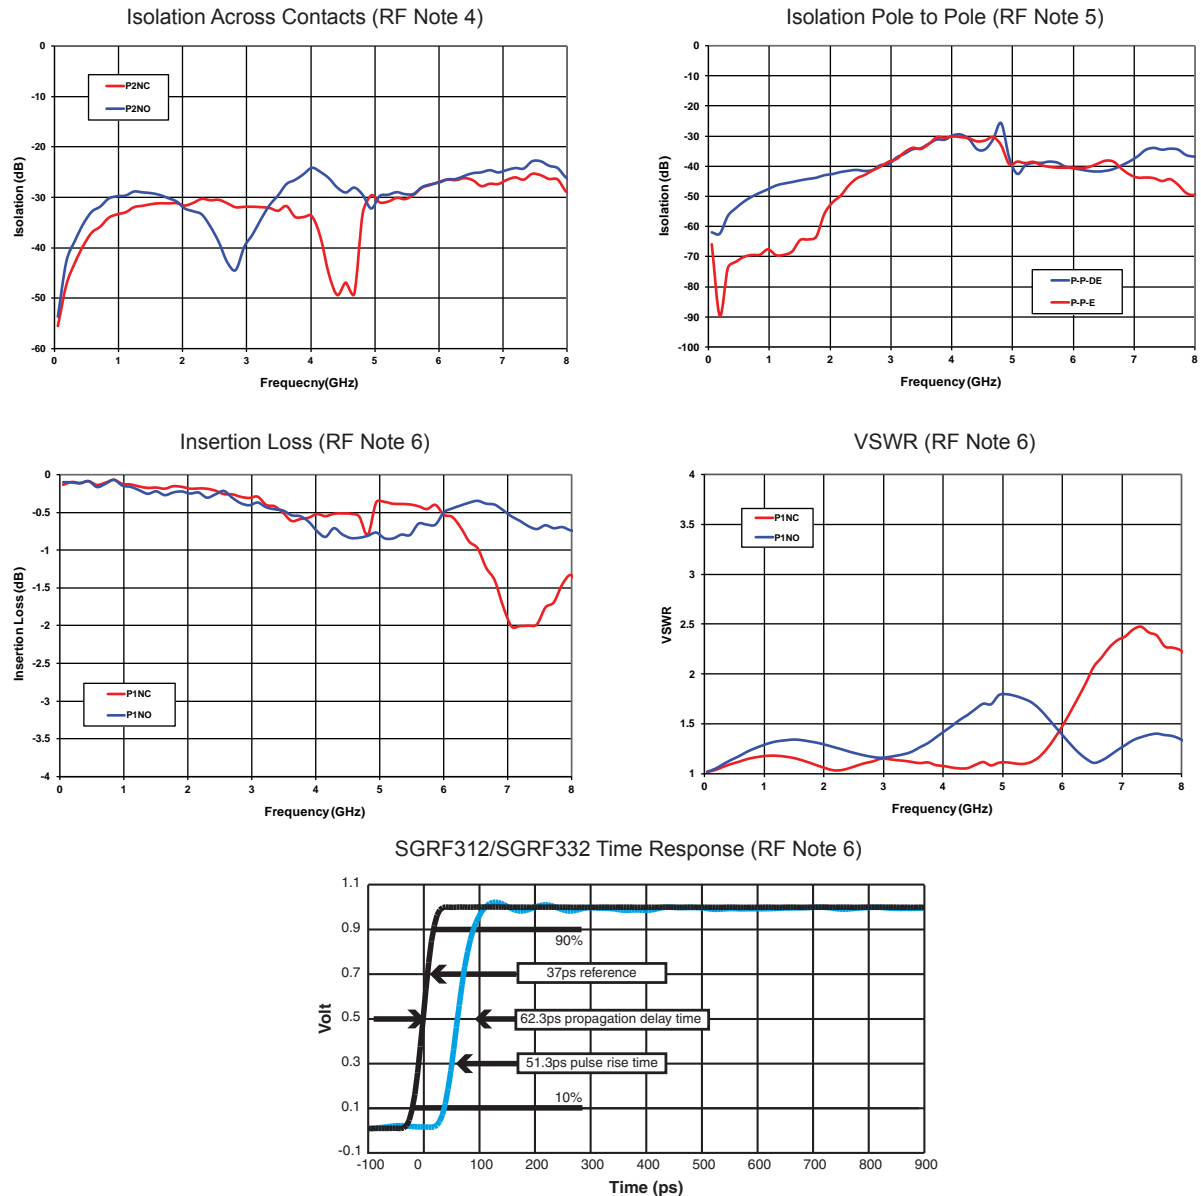

**RF NOTES**

- Test conditions:
  - Fixture: .031" copper clad, reinforced PTFE, RT/duroid® 6002 with SMA connectors. (RT/duroid® is a registered trademark of Rogers Corporation.)
  - Room ambient temperature.
  - Terminals not tested were terminated with 50-ohm load.
  - Contact signal level: -10 dBm.
  - No. of test samples: 4.
- Data presented herein represents typical characteristics and is not intended for use as specification limits.
- Data is per pole, except for pole-to-pole data.
- Data is the average from readings taken on all open contacts.
- Data is the average from readings taken on poles with coil energized and de-energized.
- Data is the average from readings taken on all closed contacts.
- Test fixture effect de-embedded from frequency and time response data.

**SERIES SGRF312/SGRF332**  
**GENERAL ELECTRICAL SPECIFICATIONS (@25°C)**


<b>Contact Arrangement</b>	2 Form C (DPDT)
<b>Rated Duty</b>	Continuous
<b>Contact Resistance</b>	0.15 Ω max.
<b>Contact Load Rating</b>	Resistive: 1Amp/28Vdc Low level: 10 to 50 μA @ 10 to 50 mV
<b>Contact Life Ratings</b>	1,000,000 cycles (typical) at low level contact load
<b>Coil Operating Power</b>	SGRF312: 450 mW typical at nominal rated voltage SGRF332: 200 mW typical at nominal rated voltage
<b>Operate Time</b>	SGRF312: 4.0 mS max. SGRF332: 6.0 mS max.
<b>Release Time</b>	3.0 mS max.
<b>Intercontact Capacitance</b>	0.4 pf typical
<b>Insulation Resistance</b>	1,000 MΩ min. between mutually isolated terminals
<b>Dielectric Strength</b>	350 Vrms (60 Hz) @ atmospheric pressure

**DETAILED ELECTRICAL SPECIFICATIONS (@25°C)**

BASE PART NUMBERS (SGRF312)	SGRF312-5	SGRF312-12
<b>Coil Voltage, Nominal (Vdc)</b>	5.0	12.0
<b>Coil Resistance (Ohms ±20%)</b>	50	390
<b>Pick-up Voltage (Vdc max.)</b>	3.6	9.0

BASE PART NUMBERS (SGRF332)	SGRF332-5	SGRF332-12
<b>Coil Voltage, Nominal (Vdc)</b>	5.0	12.0
<b>Coil Resistance (Ohms ±20%)</b>	100	850
<b>Pick-up Voltage (Vdc max.)</b>	3.6	9.0





Teledyne Part Numbering System for SGRF312/SGRF332

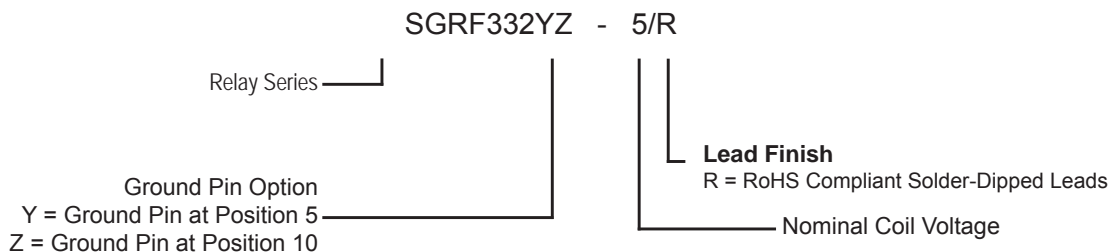

**GENERAL NOTE:**

PARTS ORDERED WITHOUT SUFFIX WILL BE SUPPLIED WITH (Sn60Pb40) SOLDER-COATED LEADS.  
PARTS ORDERED WITH ROHS SOLDER-COATED LEADS WILL HAVE (Sn99.3/Cu0.7)

**SERIES SGRF312/SGRF332**  
**OUTLINE DIMENSIONS**

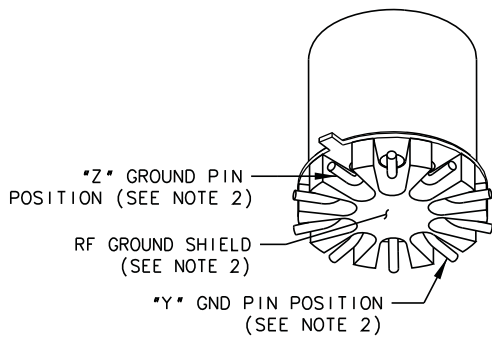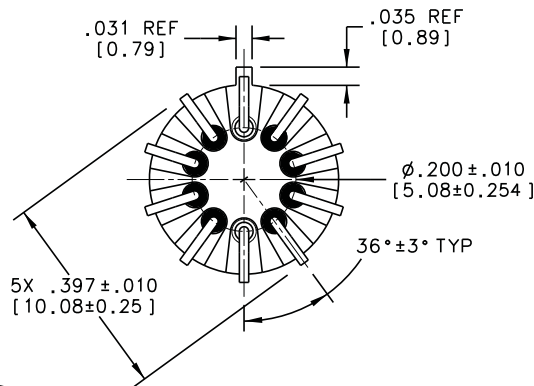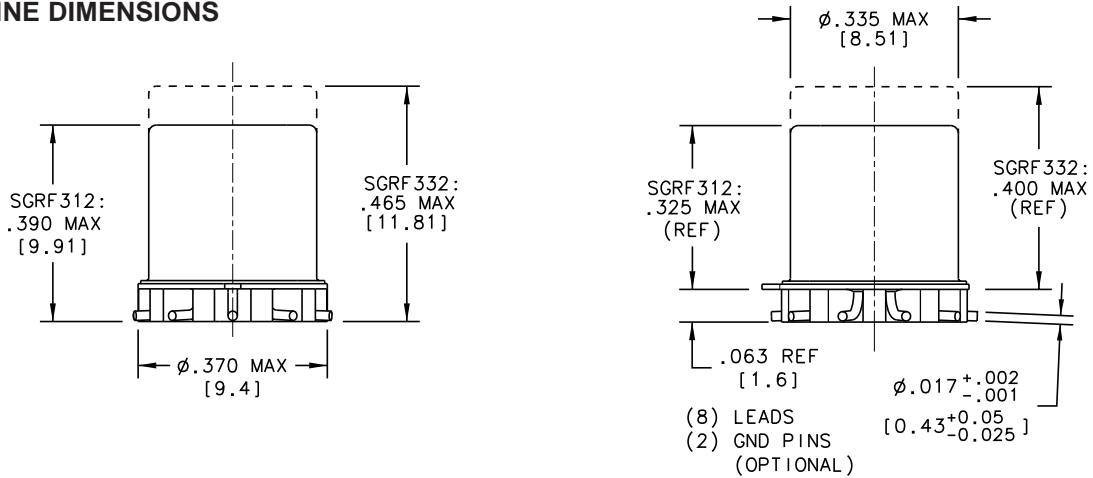

**SCHEMATIC DIAGRAM**  
**TERMINAL VIEW PIN NUMBERS**  
**ARE FOR REFERENCE ONLY NOT**  
**MARKED ON RELAYS**


**NOTES:**

1. DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS SHOWN IN [ ].
2. POSITIONS 5 AND 10 ARE FOR UNINSULATED CASE GROUND OPTIONS.
3. NO PROTRUSION BELOW BOTTOM OF HEADER WHEN GROUND PINS ARE INSTALLED
4. TO ORDER THE CASE GROUND OPTION, AFTER THE SERIES DESIGNATOR, ADD "Y" TO THE PART NUMBER FOR POSITION 5 OR "Z" TO THE PART NUMBER FOR POSITION 10.

**GENERAL NOTES**

- I. Relays will exhibit no contact chatter in excess of 10 µsec or transfer in excess of 1 µsec.
- II. For reference only. Coil resistance not directly measurable at relay terminals due to internal series diode.

**SERIES SGRF312/SGRF332**  
**TYPICAL Single-Ended Signal Integrity Characteristics @ 20 Gbps**

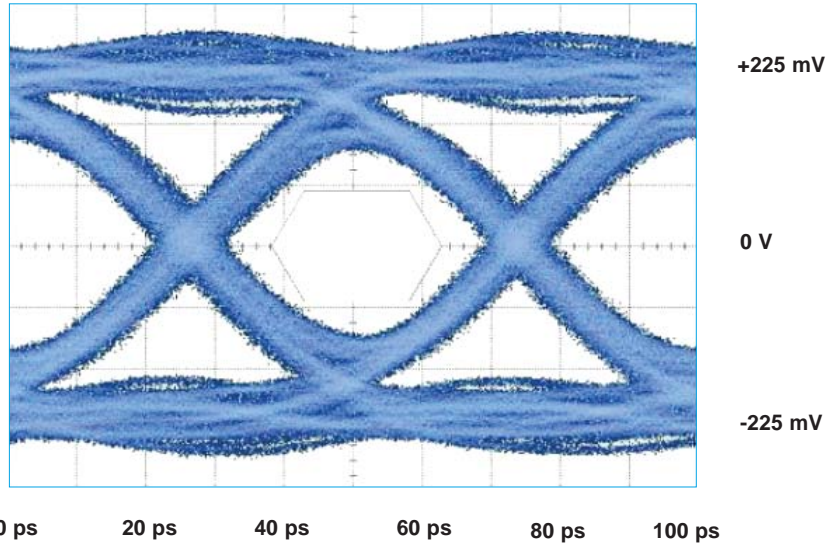

Bit Rate	Eye Height	Eye Width	Jitter <sub>p,p</sub>
20 Gbps	144 mV	33.3 ps	12.67 ps

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [High Frequency / RF Relays](#) category:*

*Click to view products by [Teledyne](#) manufacturer:*

Other Similar products are found below :

[MW6-12A](#) [ER136CZM9-5B](#) [JMSCD-12XP](#) [ARA200A4HM01](#) [3SBH1020A2](#) [IM07CGR](#) [D3210](#) [ARE13A4HZB01](#) [ER116C-26A](#) [31 T10](#)  
[26-200ZA](#) [36 AT5](#) [20-200ZA](#) [36 T5](#) [19-200ZA](#) [36 T5](#) [24-200ZA](#) [27 T5](#) [26-200ZA](#) [27 T5](#) [28-200ZA](#) [27 T5](#) [44-000ZA](#)  
[R591362640](#) [R595363125](#) [R574802625](#) [ARS15Y03](#) [R595867120](#) [HF3 02](#) [R574383400](#) [R574493685](#) [R595863115](#) [R577832100](#)  
[R594473627](#) [732TN-26](#) [ARS34Y4H](#) [JMGAP-26M](#) [JMSCDD-18XP](#) [1462051-5](#) [1462050-1](#) [1462050-2](#) [ER432DM4-26BSQ](#) [G6K-2F-RF-S-](#)  
[DC5](#) [ARE10A4H](#) [ARE1024](#) [ARE1012](#) [ARS1012](#) [ARS14Y4H](#) [ARJ22A12](#) [ARS104H](#) [ER136CM9-26A/Q](#) [G6K-2F-RF-DC3](#) [712-5](#) [G6K-](#)  
[2F-RF-S-DC3](#) [G6K-2F-RF-S-DC4.5](#) [G6K-2F-RF-S-DC12](#) [ER114DM4-26A](#)