





**Normally closed type
with reinforced insulation**

**PhotoMOS®
GE 1 Form B
(AQV410EH)**



(Height includes standoff)


mm inch



RoHS compliant

FEATURES

- 1 Form B output type**
- 2. 60V type couples high capacity (0.55A) with low on-resistance (Typ. 1Ω).**
- 3. Low on-resistance**
This has been realized thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-diffused and Selective Doping) method.

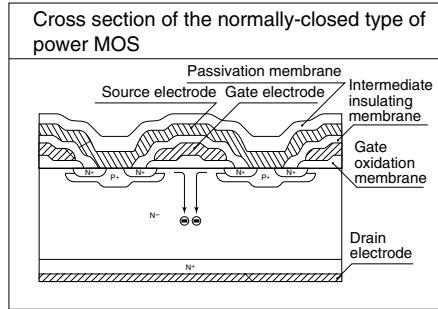

- 4. Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

- 5. High sensitivity and low on-resistance**

Can control max. 0.55 A load current with 5 mA input current.
Low on-resistance of Typ. 1Ω (AQV412EH).

- 6. Low-level off-state leakage current**

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

TYPICAL APPLICATIONS

- Power supply
- Measuring equipment
- Security equipment
- Telephone equipment
- Sensing equipment

TYPES

	I/O isolation voltage	Output rating*		Package	Part No.				Packing quantity	
					Through hole terminal	Surface-mount terminal		Tube packing style		
		Tape and reel packing style				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		Tube	Tape and reel
		Load voltage	Load current							
AC/DC dual use	5,000 Vrms (Reinforced)	60 V	550 mA	DIP6-pin	AQV412EH	AQV412EHA	AQV412EHAX	AQV412EHAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
		350 V	130 mA		AQV410EH	AQV410EHA	AQV410EHAX	AQV410EHAZ		
		400 V	120 mA		AQV414EH	AQV414EHA	AQV414EHAX	AQV414EHAZ		

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV412EH(A)	AQV410EH(A)	AQV414EH(A)	Remarks
Input	LED forward current	I_F	50 mA			f = 100 Hz, Duty factor = 0.1%
	LED reverse voltage	V_R	5 V			
	Peak forward current	I_{FP}	1 A			
	Power dissipation	P_{in}	75 mW			
Load voltage (peak AC)	V_L		60 V	350 V	400 V	
Output	Continuous load current	A	0.55 A	0.13 A	0.12 A	A connection: Peak AC, DC B,C connection: DC
		B	0.65 A	0.15 A	0.13 A	
		C	0.8 A	0.17 A	0.15 A	
	Peak load current	I_{peak}	1.5 A	0.4 A	0.3 A	A connection: 100 ms (1 shot), $V_L = DC$
Power dissipation	P_{out}	500 mW				
Total power dissipation	P_T	550 mW				
I/O isolation voltage	V_{iso}	5,000 Vrms				
Ambient temperature	Operating	T_{opr}	-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	T_{stg}	-40 to +100°C -40 to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV412EH(A)	AQV410EH(A)	AQV414EH(A)	Condition		
Input	LED operate (OFF) current	Typical	1.9 mA			$I_L = Max.$		
		Maximum	3.0 mA					
	LED reverse (ON) current	Minimum	0.4 mA			$I_L = Max.$		
		Typical	1.8 mA					
LED dropout voltage	Typical	V_F	1.25 V (1.14 V at $I_F = 5 mA$)			$I_F = 50 mA$		
	Maximum		1.5 V					
Output	On resistance	Typical	R_{on}	A	1 Ω	18 Ω	25.2 Ω	$I_F = 0 mA$ $I_L = Max.$ Within 1 s
		Maximum			2.5 Ω	35 Ω	50 Ω	
		Typical	R_{on}	B	0.55 Ω	13 Ω	19 Ω	$I_F = 0 mA$ $I_L = Max.$ Within 1 s
		Maximum			1.3 Ω	17.5 Ω	25 Ω	
		Typical	R_{on}	C	0.3 Ω	6.5 Ω	10 Ω	$I_F = 0 mA$ $I_L = Max.$ Within 1 s
		Maximum			0.7 Ω	8.8 Ω	12.5 Ω	
Off state leakage current	Maximum	I_{Leak}	10 μA			$I_F = 5 mA$ $V_L = Max.$		
Transfer characteristics	Operate (OFF) time*	Typical	T_{off}	—	3 ms	1.5 ms	1.3 ms	$I_F = 0 mA \rightarrow 5 mA$ $I_L = Max.$
		Maximum			8 ms	3.0 ms		
	Reverse (ON) time*	Typical	T_{on}	—	0.3 ms			$I_F = 5 mA \rightarrow 0 mA$ $I_L = Max.$
		Maximum			1.5 ms			
I/O capacitance	Typical	C_{iso}	—	0.8 pF			f = 1 MHz $V_B = 0 V$	
	Maximum			1.5 pF				
Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ			500 V DC		

*Operate/Reverse time

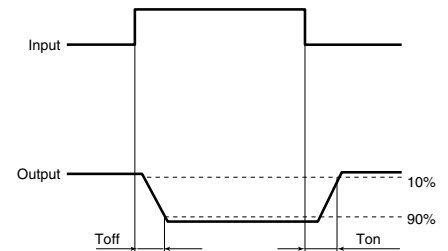

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
LED current	I_F	5	30	mA
AQV412EH(A)	Load voltage (Peak AC)	V_L	48	V
	Continuous load current (A connection)	I_L	0.55	A
AQV410EH(A)	Load voltage (Peak AC)	V_L	280	V
	Continuous load current (A connection)	I_L	0.13	A
AQV414EH(A)	Load voltage (Peak AC)	V_L	320	V
	Continuous load current (A connection)	I_L	0.12	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F


Type of connection: A

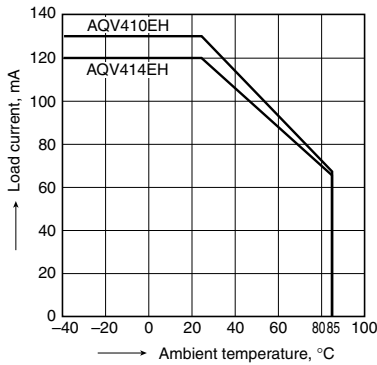

1-(2). Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

Type of connection: A

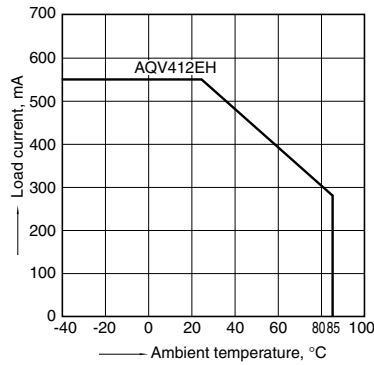


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 0 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

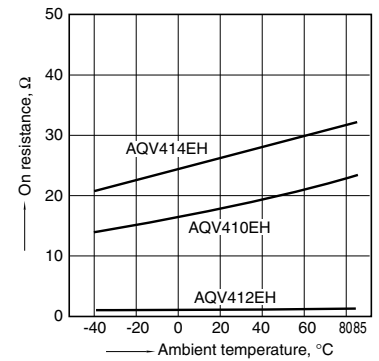


3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

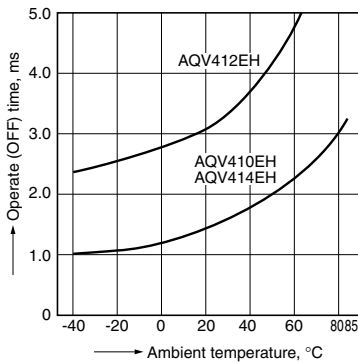


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

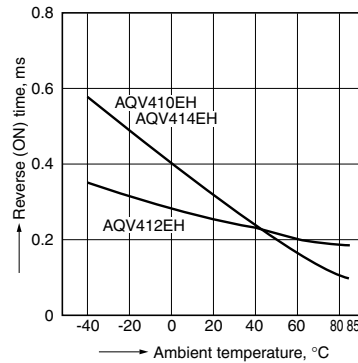


5. LED operate (OFF) current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

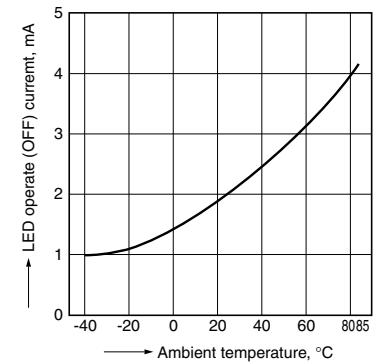


6. LED reverse (ON) current vs. ambient temperature characteristics

Sample: All types;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

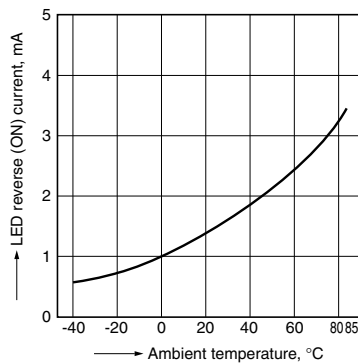


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

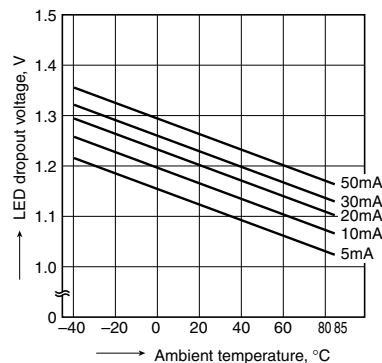

8-(1). Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F



GE 1 Form B (AQV410EH)


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Sample: All types;
Measured portion: between terminals 4 and 6;
LED current: 5 mA; Ambient temperature: 25°C 77°F

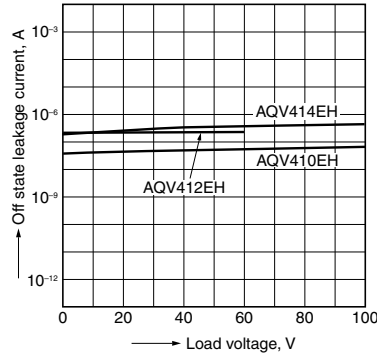


10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

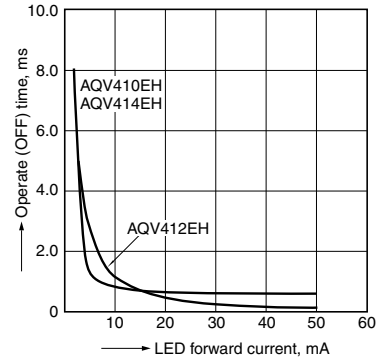


11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

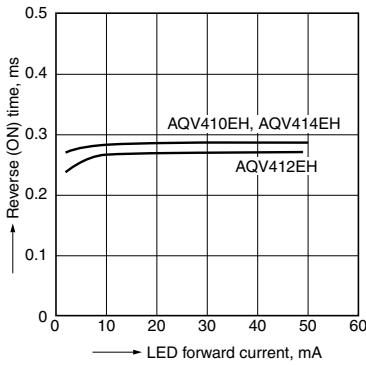

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

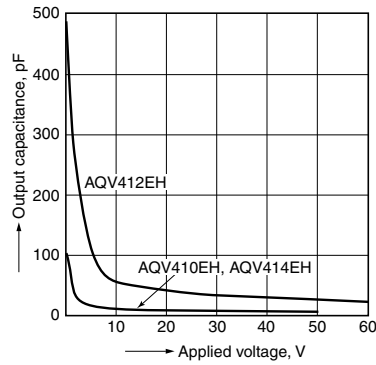

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [G3CN-202PL-3-US DC12](#) [G3CN-203P DC3-28](#) [G3RDX02SNUSDC12](#)
[PLA134S](#) [DMP6202A](#) [DS11-1005](#) [AQ3A2-ZT432VDC](#) [AQV212J](#) [AQV214SD02](#) [AQV252GAJ](#) [AQW414EA](#) [AQY212SXT](#) [AQY221N2SJ](#)
[AQY221R2SJ](#) [EFR1200480A150](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQV212AJ](#) [AQV238AD01](#) [AQW414TS](#) [AQY210SXT](#)
[AQY212ST](#) [AQY214SXT](#) [AQY221N2V1YJ](#) [AQY275AXJ](#) [G2-1A02-ST](#) [G2-1A02-TT](#) [G2-1A03-ST](#) [G2-1A03-TT](#) [G2-1A05-ST](#) [G2-1A06-](#)
[TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [G3M-203PL-UTU-1 DC24](#)
[CPC2330N](#) [3-1617776-2](#) [CTA2425](#) [TS190](#)