

Resistance Welded HC-49/S Surface Mount Package

■ FEATURE

- Height 4.0mm or 3.0mm, compact unit for surface mount
- Able to by means of a metal case and completely sealed high solution characteristics
- Copes with high density mounting and is the optimum for mass production



■ ELECTRICAL SPECIFICATIONS


Item	Specifications
Frequency Range	3.579545 to 100.000MHz
Load Capacitance(C _L)	Series, 16pF, 18pF, 20pF, 30pF, or specify
Frequency Tolerance(at 25 ± 2°C)	± 30ppm at 25 ± 2°C(standard) or specify
Operating Temperature Range	-10°C---+60°C (standard), -20°C---+70°C, -40°C---+85°C, or Specify
Frequency Stability Over Operating Temperature range	± 30ppm(Typical), or specify
Storage Temperature Range	-40°C---+ 85°C
Shunt Capacitance (C ₀)	7pF Max
Drive Level	100 μ W Typical
Insulation resistance	More than 500MΩ AT DC100V
Aging(at 25° C)	± 5ppm/year maximum

*Please consult our sales representative for other specifications.


■ EQUIVALENT SERIES RESISTANCE(ESR) AND OSCILLATION MODE

Frequency Range	ESR(Ω)	Mode	Frequency Range	ESR(Ω)	Mode
3.579545MHz~5.999MHz	150Max	Fundamental/AT	24.000MHz~40.320MHz	30Max	Fundamental/BT
6.000MHz~7.999MHz	60Max	Fundamental/AT	24.000MHz~29.999MHz	100Max	Third Overtone/AT
8.000MHz~15.999MHz	50Max	Fundamental/AT	30.000MHz~49.999MHz	80Max	Third Overtone/AT
16.000MHz~30.000MHz	30Max	Fundamental/AT	50.000MHz~100.000MHz	60Max	Third Overtone/AT

DIMENSION(mm)

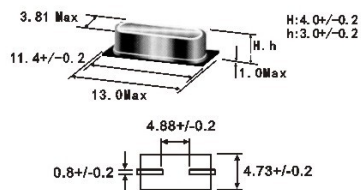

TAPE SPECIFICATION(mm)

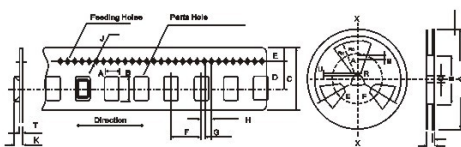

Description		Code	Dimensions	
Flanges	Diameter	A	φ 330+/-2.0	
	Thickness	t	2.4+/-0.2	
	Width between Flanges	W	+2.0 24.4-0	
Flanges	Outline Diameter	B	φ 100+/-2.0	
	Center Core slit	Width	F	2.3+/-1.0
		Depth	V	6.0+/-1.0
	Spindle Diameter	Position	Q	120+/-3.0°
			C	φ 13.0+/-0.5
	Key Seats	Width	E	2.5
		Depth	U	5.0+/-0.5
Position		Q	120° +/-3.0°	
Fenestrate	Outline Radius	R _o	R90+/-1.0	
	Inline Radius	R _i	R40+/-1.0	
	Rounded Corners	R _c	+2.0 R5-0	
	Open Angle	R	40° +/-2°	

Code	Dimension	Code	Dimension	Code	Dimension
A	5.0+/-0.1	E	1.75+/-0.1	J	φ 1.5(+0.1, -0)
B	15.0+/-0.2	F	8.0+/-0.1/ 12.0+/-0.1	K	5.0+/-0.1
C	24.0+/-0.3	G	2.0+/-0.1	T	5.0+/-0.1
D	11.05+/-0.1	H	4.0+/-0.1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [SR Passives](#) manufacturer:

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)