

Flashguard LED Beacons



Features

- Compact, ultra modern sleek appearance
- Long life LED design
- Ease of installation with first-fix option on standard models
- Weatherproof to IP67
- White, high quality polycarbonate housing
- Vandal-resistant safety locking mechanism
- Flashing or static indicators

Overview

Flashguard weatherproof LED beacons are ideal visual indicators in a variety of applications.

All Flashguard LED beacons are low current and have an exceptionally long life compared to traditional types of beacon. They also have a diffuser for greater visibility and spread of light.


Standard: includes a terminal block and a 27mm deep base supplied with a seal and grommet.

Ultra Low Profile: comes complete with a screw and nylon wing nut and is supplied with mounting gasket and 40cm of cable.

A weatherproof cable connector is available to upgrade the product from IP65 rating to IP67.

Applications

- Fire alarm; security alert; emergency warning; process control alarm

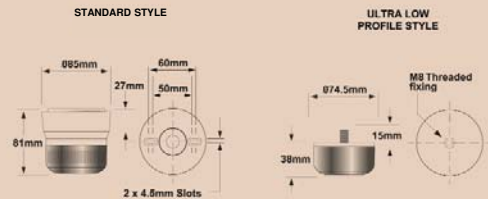

- Fire
- Security
- Industrial
- Railway/Marine
- Hazardous Area
- Public Warning

| Type and Style | Part No. Red Lens | Part No. Amber Lens | Part No. Clear Lens | Part No. Blue Lens | Part No. Green Lens | Voltage | Current | Static or Flashing | Flash Rate |
|-----------------------|-------------------|---------------------|---------------------|--------------------|---------------------|-----------|---------|--------------------|------------|
| LED Standard | 45-711611 | 45-711621 | 45-711631 | 45-711641 | 45-711651 | 110V AC | 32mA | Static | N/A |
| LED Standard | 45-711811 | 45-711821 | 45-711831 | 45-711841 | 45-711851 | 110V AC | 32mA | Flashing | 1Hz |
| LED Standard | 45-712611 | 45-712621 | 45-712631 | 45-712641 | 45-712651 | 230V AC | 32mA | Static | N/A |
| LED Standard | 45-712811 | 45-712821 | 45-712831 | 45-712841 | 45-712851 | 230V AC | 32mA | Flashing | 1Hz |
| LED Standard | 45-716411 | 45-716421 | 45-716431 | 45-716441 | 45-716451 | 11/35V DC | 50mA | Static/Flashing* | 1Hz |
| LED Ultra Low Profile | 45-716413 | 45-716423 | 45-716433 | 45-716443 | 45-716453 | 11/35V DC | 50mA | Static/Flashing* | 1Hz |

*These units are user-configurable

IP Rating: IP65 (Standard) IP67 (Ultra) **Operating Temp:** -20°C to +70°C

Construction: Polycarbonate Lens & UV Stabilised Polycarbonate/ABS Body and Case **Weight:** 0.14kg

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [KLAXON SIGNALS](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)