


APPLICATION

Instrumentation and computer cable for data transmission applications.

CONSTRUCTION

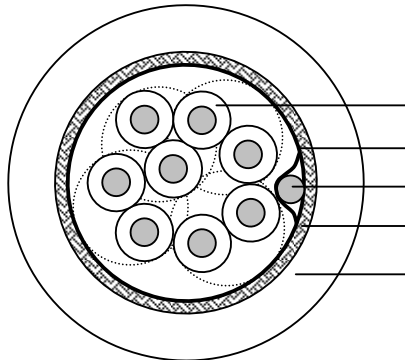

- 1. Insulated conductor
- 2. Foil
- 3. Drainwire
- 4. Braiding
- 5. Sheath

1. Insulated conductor

Conductor
Insulation material
Diameter over insulation
Colour of insulation

AWG24 (7xAWG32) tinned Cu
Datalene
1.24 ± 0.06 mm
Pair 1: White/blue; blue/white
Pair 2: White/orange; orange/white
Pair 3: White/green; green/white
Pair 4: White/brown; brown/white

2. Foil (Z-fold®)

Material
Thickness

Aluminium / Polyester
9 / 12 µm

3. Drainwire

Material

AWG24 (7xAWG32) tinned Cu

4. Braiding


Material
Coverage

Tinned copper wire
>65%

5. Sheath

Material
Colour
Minimum wall thickness
Minimum average wall thickness
Nominal diameter over sheath

PVC
Chrome
0.711 mm
0.813 mm
7.86 mm

	TECHNICAL DATA SHEET	code	8104
		version	2
		date	2005-11-03
	8104	page	2/2

REQUIREMENTS AND TEST METHODS

Electrical:

Max. operating voltage type CM	300 V RMS
Max. operating voltage type AWM 2919	30 V RMS
Max. continuous current per conductor @ 25 °C	1.5 A
Nominal capacitance conductors of pair @ 1 kHz	41.0 pF/m
Max. capacitance conductors of pair @ 1 kHz	45.9 pF/m
Nominal capacitance conductor to shield @ 1 kHz *	72.2 pF/m
Nominal impedance	100 Ω
Nominal inductance	0.75 microH/m
Nominal resistance conductor	78.7 Ω/km
Nominal resistance shield	11.5 Ω/km

*One conductor to other conductor and shield.

**Nominal values are for information only.

Mechanical and physical:

Temperature range	-30 to +80 °C
Nominal weight per 100m	approx. 6.5kg
Maximum pulling tension	220 N
Minimum bending radius	80 mm

MARKING

Text: Inkjet printing in blue

BELDEN V 8104 CM 4PR24 SHIELDED (UL) E108998 OR AWM 2919 LOW VOLTAGE
COMPUTER CABLE OR C(UL) CM xxmm

xx = jaartal +15

mm= maand

PACKAGING

On non-returnable reels with a nominal length of 305m (-0, +10%) or on non-returnable reels. Each reel is labelled with the following data: Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)