

Product description	Polzahl: 6, Kabeldose, rechtsdrehend
Area	M23 Power Series 623
Order number	99 4636 00 06

Illustration	Scale drawing	Contact arrangement																					
		<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-4,13</td> <td>2,38</td> </tr> <tr> <td>2</td> <td>-4,13</td> <td>-2,38</td> </tr> <tr> <td>3</td> <td>0,00</td> <td>-4,75</td> </tr> <tr> <td>4</td> <td>4,13</td> <td>-2,38</td> </tr> <tr> <td>5</td> <td>4,13</td> <td>2,38</td> </tr> <tr> <td>6</td> <td>0,00</td> <td>0,00</td> </tr> </tbody> </table>		X	Y	1	-4,13	2,38	2	-4,13	-2,38	3	0,00	-4,75	4	4,13	-2,38	5	4,13	2,38	6	0,00	0,00
	X	Y																					
1	-4,13	2,38																					
2	-4,13	-2,38																					
3	0,00	-4,75																					
4	4,13	-2,38																					
5	4,13	2,38																					
6	0,00	0,00																					

You can find the assembly instructions on the next page.


Technical data

<h3 style="color: #f4a460;">General values</h3> <table border="0"> <tr><td>Connector design</td><td>Female cable connector</td></tr> <tr><td>Connector locking system</td><td>bolted</td></tr> <tr><td>Termination</td><td>solder</td></tr> <tr><td>Wire gauge (mm)</td><td>2,50 mm²</td></tr> <tr><td>Wire gauge (AWG)</td><td>14</td></tr> <tr><td>Cable outlet</td><td>6 - 10 mm</td></tr> <tr><td>Upper limit temperature</td><td>125 °C</td></tr> <tr><td>Lower limit temperature</td><td>-20 °C</td></tr> </table>	Connector design	Female cable connector	Connector locking system	bolted	Termination	solder	Wire gauge (mm)	2,50 mm ²	Wire gauge (AWG)	14	Cable outlet	6 - 10 mm	Upper limit temperature	125 °C	Lower limit temperature	-20 °C	<h3 style="color: #f4a460;">Electrical values</h3> <table border="0"> <tr><td>Rated voltage</td><td>300 V</td></tr> <tr><td>Rated impulse voltage</td><td>2500 V</td></tr> <tr><td>Pollution degree</td><td>3</td></tr> <tr><td>Overvoltage category</td><td>II</td></tr> <tr><td>Insulating material group</td><td>III</td></tr> <tr><td>Rated current (40 °C)</td><td>20 A</td></tr> <tr><td>Volume resistivity</td><td>≤ 3 mΩ</td></tr> <tr><td>EMC compliance</td><td>Shielding is not possible</td></tr> <tr><td>Degree of protection</td><td>IP67</td></tr> <tr><td>Mechanical operation</td><td>> 50 Mating cycles</td></tr> </table>	Rated voltage	300 V	Rated impulse voltage	2500 V	Pollution degree	3	Overvoltage category	II	Insulating material group	III	Rated current (40 °C)	20 A	Volume resistivity	≤ 3 mΩ	EMC compliance	Shielding is not possible	Degree of protection	IP67	Mechanical operation	> 50 Mating cycles	<h3 style="color: #f4a460;">Material</h3> <table border="0"> <tr><td>Contact material</td><td>CuSn (Bronze)</td></tr> <tr><td>Contact plating</td><td>Au (gold)</td></tr> <tr><td>Contact body material</td><td>PBT/PA66</td></tr> </table>	Contact material	CuSn (Bronze)	Contact plating	Au (gold)	Contact body material	PBT/PA66
Connector design	Female cable connector																																											
Connector locking system	bolted																																											
Termination	solder																																											
Wire gauge (mm)	2,50 mm ²																																											
Wire gauge (AWG)	14																																											
Cable outlet	6 - 10 mm																																											
Upper limit temperature	125 °C																																											
Lower limit temperature	-20 °C																																											
Rated voltage	300 V																																											
Rated impulse voltage	2500 V																																											
Pollution degree	3																																											
Overvoltage category	II																																											
Insulating material group	III																																											
Rated current (40 °C)	20 A																																											
Volume resistivity	≤ 3 mΩ																																											
EMC compliance	Shielding is not possible																																											
Degree of protection	IP67																																											
Mechanical operation	> 50 Mating cycles																																											
Contact material	CuSn (Bronze)																																											
Contact plating	Au (gold)																																											
Contact body material	PBT/PA66																																											

Product description **Polzahl: 6, Kabeldose, rechtsdrehend**

Area **M23 Power Series 623**
Order number **99 4636 00 06**

Assembly instructions / Panel cut-out

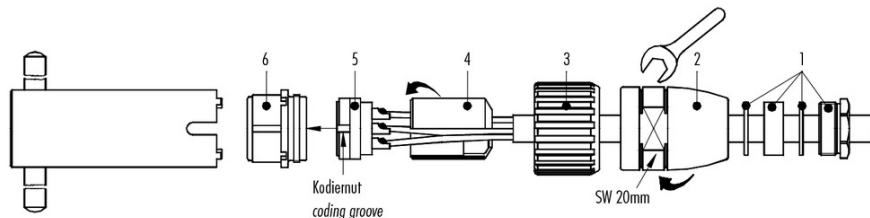

- Kabelverschraubung Pos. 1, Adapter Pos. 2 und Überwurfmutter Pos. 3 auf das Kabel schieben.
- Kabel-Außenmantel 20 mm abisolieren.
- Folie, Füller und innere Isolierungen abschneiden.
- Litzen 3,5 mm abisolieren, verdrehen und verzinnen.
- Litzen an Kontakte löten, crimpen oder schrauben.
- Distanzhülse Pos. 4 einfügen.
- Einsatz Pos. 5 und Distanzhülse Pos. 4 in Einsatzring Pos. 6 einführen. Hierbei ist zu beachten, daß die gewünschte Kodiermut des Einsatzes Pos. 6 in den Kodiersteg eingeführt wird.
- Adapter Pos. 2 Festschrauben auf Anschlag.
- Kabelverschraubung Pos. 1 Festschrauben.

- Push the cable screw connection (1), adapter (2) and coupling nut (3) onto the cable.
- Strip the cable coating by 20 mm.
- Trim foil, filler and inner insulation.
- Strip the single wires by 3.5 mm, twist and tin.
- Solder, crimp or screw the single wires to the contacts.
- Insert the distance shell (4).
- Guide the insert (5) and distance shell (4) into the insert ring (6), mind that the desired coding groove of the insert (6) is pushed into the coding bar.
- Screw the adapter (2) as tight as possible.
- Screw the cable gland (1) as tight as possible.

Anzugsdrehmoment für Klemmschraube Kontakteinsatz Pos. 5 mit Schraubkontakten beachten:

- max. 0,1 Nm für Schraubkontakte Steckdurchmesser 1 mm
- max. 0,2 Nm für Schraubkontakte Steckdurchmesser 2 mm

Please note: torque for clamping screw for contact insert (5) with screw contacts:

- max. 0.1 Nm for screw contacts with mating dia. 1 mm
- max. 0.2 Nm for screw contacts with mating dia. 2 mm

Product description **Polzahl: 6, Kabeldose, rechtsdrehend**

Area **M23 Power Series 623**
Order number **99 4636 00 06**

Sicherheitshinweise

1. The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.
2. The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.
4. Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.
6. Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.
8. To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Binder manufacturer](#):

Other Similar products are found below :

[89075GULPR](#) [0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-213-1208](#) [0134-213-2209](#) [0025-258-000](#) [60-042022-07P](#) [60-042022-19P](#)
[60-042022-23P](#) [60-042217-10P](#) [60-042217-11P](#) [0114-201-1278](#) [012-0467-000](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-213-1006](#) [6104-](#)
[207-2302](#) [6104-208-1902](#) [61-168211-04P](#) [61-168617-10P](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-](#)
[210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3100A18-1P-](#)
[472](#) [CS3100A-36-77P](#) [CS3101A-16-55P](#) [CS3102A-10SL-55P](#) [CS3102A-14S-58P](#) [CS3102A-18-1P116](#) [CS3102A-32-17P](#) [CS3102A32-25S](#)
[CS3102C18-4P-472](#) [CS3106A10SL3S004](#) [CS3106A-18-73S](#) [CS3108A-14S-52S](#) [CS3108A-28-51S](#) [6162-233-1277](#) [6162-324-1231](#)
[M243082296Z](#) [M2884010AC1S1](#) [CT0-24-10SC](#)