


Bushings, Nipples, Locknuts and Plugs

Available in your choice of steel/malleable iron, aluminum or stainless steel.

Locknuts

- Steel from 1/4" to 2", malleable iron from 2 1/2" to 6"
- Aluminum 3003 from 1/2" to 6" or Type 304 stainless steel from 1/2" to 2"

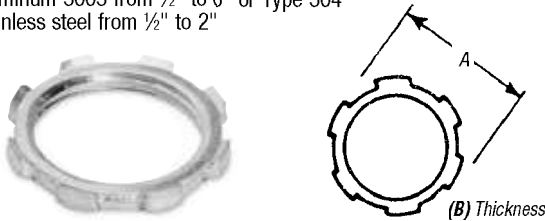

CAT. NO.			DIMENSIONS (IN.)		
STL./M.I.	ALUM.	ST. STL.	SIZE (IN.)	A	B
139*	—	—	1/4	3/4	9/64
140*	—	—	3/8	1 1/16	9/64
141**	141AL	141-SST	1/2	1 1/64	5/32
142**	142AL	142-SST	3/4	1 3/8	3/16
143	143AL	143-SST	1	1 11/16	13/64
144	144AL	144-SST	1 1/4	2 1/32	13/64
145	145AL	145-SST	1 1/2	2 1/2	13/64
146	146AL	146-SST	2	3	7/32
147	147AL	—	2 1/2	3 3/16	13/32
148	148AL	—	3	4 1/16	13/32
149	149AL	—	3 1/2	4 13/16	15/32
150	150AL	—	4	5 5/16	15/32
151	151AL	—	4 1/2	5 15/16	17/32
152	152AL	—	5	6 1/2	17/32
153	153AL	—	6	7 1/4	19/32

*Hex shape

**Case hardened locknuts

Aluminum locknuts comply with federal standard of copper-free aluminum; less than .5% copper.

Available with DURA-PLATE® Finish.


UL File E-23018

CSA File No. 2884

Ensures positive bonding of conduit to box and prevents loosening due to vibration!

Bonding Locknuts

- Steel or malleable iron (steel through 2")
- Can be used anywhere an ordinary locknut is installed
- Also can be used for Service Entrance applications in conformance with code
- T&B rigid conduit and EMT (thinwall) fittings comply with Federal Specification A-A-50553

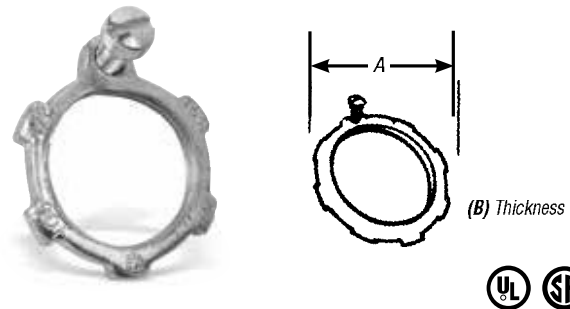

CAT. NO.	SIZE (IN.)	DIMENSIONS (IN.)	
		A	B
106†	1/2	1 1/8	.125
107†	3/4	1 1/8	.140
108	1	1 15/16	.170
109	1 1/4	2 5/32	.170
110	1 1/2	2 1/2	.170
111	2	3	.187
112†	2 1/2	3 33/32	.375
113†	3	4 13/16	.375
114†	3 1/2	4 29/32	.438
115†	4	5 1/2	.438

† Not CSA certified.

Available with DURA-PLATE® Finish.

UL File No. E-3060

CSA File No. 638

Provides positive seal against water and oil.

Sealing Locknuts

- For use with rigid and intermediate metal conduits or fittings
- Provides watertight or raintight seal at all enclosures



CAT. NO.	SIZE (IN.)	DIMENSIONS (IN.)		
		A	B	C
141SL	1/2	1.140	1/8	1/4
142SL	3/4	1.420	5/32	5/32
143SL	1	1.770	1/64	5/32
144SL	1 1/4	2.281	1/64	3/16
145SL	1 1/2	2.598	1/64	5/32
146SL	2	3.175	3/16	1/64

UL File No. E-23018
CSA File No. 2884

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ABB manufacturer:](#)

Other Similar products are found below :

[TY27MX](#) [TV10-516R](#) [RF727](#) [2CMA100178R1000](#) [ACS150-01E-09A8-2](#) [KS70-1104](#) [A75-30-11-230V-50HZ](#) [10-100](#) [5SDD](#) [92Z0401](#)
[ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.1](#) [F362-25/0.03](#) [A40-30-10-84](#) [AF26-30-00-14](#) [AF30-30-00-13](#) [AF460-30-11-68](#) [AF50-30-11-70](#)
[1455](#) [B14-250](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ711201R1045](#) [1SAZ721201R1009](#)
[1SAZ721201R1014](#) [1SAZ721201R1025](#) [1SAZ721201R1045](#) [1SBL367001R1300](#) [1SDA057197R1](#) [1SFA611100R1104](#) [1SFA611101R1002](#)
[1SFA611130R1103](#) [1SFA611133R1106](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611210R1101](#)
[1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611281R1002](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#)
[1SFA896106R1100](#) [1SVR730020R0200](#) [IPC4111](#) [OHB125J12](#)