

GENTECH INTERNATIONAL LTD

FLOW SWITCH

Grangestone Industrial Estate Girvan, Ayrshire KA26 9PS

an, Ayrshire KA26 9PS United Kingdom

Telephone: +44 1465 713581 Fax: +44 1465 714974

E-Mail: info@gentechsensors.com Web Site www.gentechsensors.com

FS Series - Flow Switch in Copper

FS-10

Design Features

- 15mm copper pipe
- Minimal pressure drop
- Operates from a small head of water
- Vertical mount /-15°
- Suitable for water and air flow switching

Product Comments

- 15mm copper pipe
- Suitable for hot and cold portable water
- Reed Switch reliability
- Meets UL 94-HB flammability rating
- Easy installation

Typical Applications

- Mains water control
- Power Shower
- Central Heating Systems
- Leak Detection
- Cooling systems




Material, Design and Operation	
Mounting:	Flow Switch Vertical
Material:	Copper
Fitting	Flow Switch 15mm pipe size
Contact Form:	Form A -SPST
Contact Material:	Ruthenium
Maximum Watts	15 Watts
Maximum Switching Volts:	300 VDC
Maximum Switching Current:	1.0A
Cable Type:	2 x 16/0.2mm PVC insulated 1.0M long
Cable Colour:	Black/Black
Operating Temperature Range:	85 °C
Medium/Liquid:	Water
Flow Rate:	0.5 litres/min
Operating Pressure:	10BAR
Mounting Shock:	50g for 11ms duration
Mounting Vibration:	35g up to 500Hz






Line Drawing

FS-10

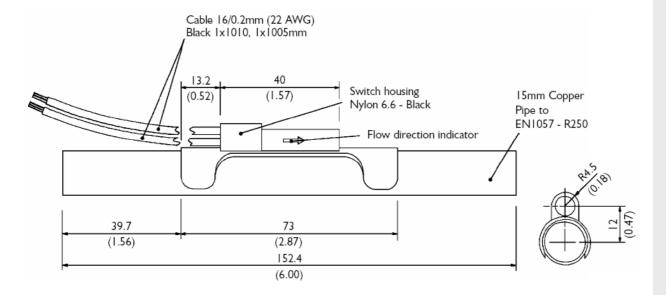

Installation

- Pipework to be cut square and burr free
- Compression fitting mating connectors to be of suitable quality.
- The installation should be checked to ensure that no leaking is evident.
- Pipework/connector alignment imperative (avoiding bending stress).

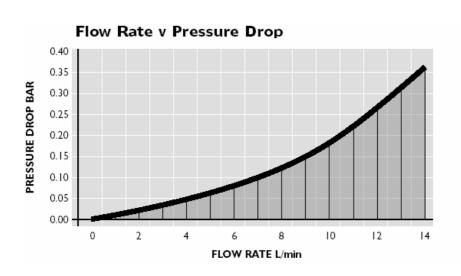

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity manufacturer:

Other Similar products are found below:

4-1633138-8 570416-000 CLTEQ-M81CE-SSRELAY-4-20V D38999/24FJ4AN 4-1195131-0 650069-000 SMD100-2 CB-1022B-78
RM707012 RP410012 MMS42 1-640426-8 2EDL4CM DTS20W19-11PD-3028-LC RM202615 NC6-P104-06 MSPS103B DTS26F2141HE-LC DTS26F21-41AE DTS26F21-41PE-LC DTS26F21-11SE-3028-LC 1932144-1 293545-4 LVR125S MS27466T25F4PB CKB-3878010 1206SFF150F/63-2 D38999/20JB35HA D38999/24WJ20PA TE1500A2R2J DTS24F25-29PC-3028-LC D38999/24WG11HA
D38999/24WG11HN MS27467T21F11H DJT16E21-11HA 1206SFH150F/24-2 DTS24F19-11SC-3028-LC DTS24F21-41HN-LC
DTS24F21-41AN DTS24F21-41PN-LC RP330024 MS27467T21F35J MS27467T21F11J MS27467T21F16H-LC MS27467T21F35H
MS27467T21F41H-LC DJT16E21-11PA-LC DJT16E21-11HA-LC DJT16E21-11AA MS27467T21B11JA