

Product Specification

Product Model: Nickel-Metal Hydride Battery

Product Type: J-1/2A1100

Draw up: Technical Department

Date: 2015-12-3





1、SCOPE

This specification governs the performance of the following **JJJ** Nickel-Metal Hydride cylindrical cell and its stack-up battery.

JJJ Model: 1/2A1100

Cell Size: 1/2Acrew cut(16.3±0.1×27.4±0.5)mm

2、DATA OF STACK UP BATTERIES

All data involve voltage and weight of stack-up batteries are equal to the value of unit cell multiplied by the number of unit cell which consisted in the stack-up batteries

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries =1.2V×3=3.6V

3、RATINGS

| Description | Unit | Specification | Condition |
|---------------------------|--------|----------------------------|--|
| Nominal Voltage | V/cell | 1.2 | Unit cell or stack-up batteries |
| Minimum Capacity | mAh | 1050 | Standard Charge/Discharge |
| Nominal Capacity | mAh | 1100 | Standard Charge/Discharge |
| Standard Charge | mA | 110 (0.1C) | T ₁ =20±5℃(See Note 1) |
| | hour | 16 | |
| Fast Charge | mA | 550 (0.5C) | - Δ V=0~5mV/cell , Timer Cutoff=120%nominal capacity , Temp.Cutoff=55℃, dT/dt=0.8℃/min, T ₁ =20±5℃ |
| | hour | 2.4 approx (See Note 2) | |
| Trickle Charge | mA | (0.03C)~(0.05C) | T ₁ =20±5℃ |
| Standard discharge | mA | 220 (0.2C) | T ₁ = 20±5℃ Humidity: Max.85% |
| Discharge Cut-off Voltage | V/cell | 1.0 | |
| Storage Temperature | ℃ | -20~25 | Within 1 year* |
| | | -20~35 | Within 6 months |
| | | -20~45 | Within 1 month |
| | | -20~55 | Within 1 week |
| Typical Weight | Gram | 19.5 | unit cell |

*To keep the best performance for those not used for a long time,we recommend to charge the cells/batteries at least 30% after discharge entirely in every 6 months.

JJJ reserves the right to alter or amend the design, model and specification without prior notice.

JIANGMEN JJJ BATTERY CO.,LTD.

**4、 PERFORMANCE**

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : $20\pm 5^{\circ}\text{C}$

Relative Humidity : $65\pm 20\%$

Notes: Standard Charge/Discharge conditions:

Charge: 110 mA(0.1C)× 16 hours

Discharge: 220 mA(0.2C) to 1.0V/cell

| Test | Unit | Specification | Condition | Remarks |
|---------------------------|------------|---|--|-------------------------------|
| Capacity | mAh | ≥ 1050 | Standard Charge/ Discharge | up to 3 cycles are allowed |
| Open Circuit Voltage(OCV) | V | ≥ 1.25 | Within 1 hour after standard charge | |
| Internal Impedance | m Ω | ≤ 35 | Upon fully charged(1KHz) | |
| High Rate Discharge(1C) | min | ≥ 51 | Standard Charge, 1 hour rest before discharge by 1C to 1.0V/cell | up to 3 cycles are allowed |
| Charge Retention | mAh | ≥ 660 (60%) | Standard Charge,Storage: 28 days Standard Discharge | $T_1=20\pm 5^{\circ}\text{C}$ |
| IEC Cycle Life | Cycle | ≥ 500 | IEC61951-2(2003)7.4.1.1 | see Note 3 |
| Leakage | | No leakage nor deformation | Fully charged at : 110 mA for 48 hrs | |
| Vibration Resistance | | Change of voltage should be less than 0.02V/cell,Change of impedance should be less than 5 milli-ohm/cell | Charge the battery at 0.1C for 14hrs,then leave for 24hrs,check battery before/after vibration,amplitude 1.5mm,vibration 3000 CPM,any direction for 60mins. | |
| Impact Resistance | | Change of voltage should be less than 0.02V/cell,change of impedance should be less than 5 milli-ohm/cell | Charge the battery at 0.1C for 14hrs,then leave for 24hrs,check battery before/after dropped,height 50 cm wooden board(thickness 30mm)direction not specified,3 times. | |

JJJ reserves the right to alter or amend the design, model and specification without prior notice.

JIANGMEN JJJ BATTERY CO.,LTD.



5、 CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage or deformation.

7、 WARRANTY

One year limited warranty against workmanship and material defects.

8、 CAUTION

- [1]Reverse charging is not acceptable.
- [2]Charge before use. The cells/batteries are delivered in an uncharged state.
- [3]Do not charge/discharge with more than our specified current.
- [4]Do not short circuit the cell/battery Permanent damage to the cells/batteries may result.
- [5]Do not incinerate or mutilate the cells/batteries.
- [6]Do not solder directly to the cells/batteries.
- [7]The expected life may be reduced if the cells/batteries are subjected to adverse conditions as:
extreme temperature, deep cycling, excessive overcharge/ over-discharge.
- [8]Store the cells/batteries in a cool dry place. Always discharge batteries before packing.

Notes:

- [1] T_1 : Ambient Temperature.
- [2] Approximate charge time from discharged state, for reference only.
- [3] IEC61951-2(2003)7.4.1.1 Cycle Life:

| Cycle No. | Charge | Rest | Discharge |
|-----------|---------------|------|--------------------|
| 1 | 0.1C×16h | None | 0.25C×2h20min |
| 2-48 | 0.25C×3h10min | None | 0.25C×2h20min |
| 49 | 0.25C×3h10min | None | 0.25C to 1.0V/cell |
| 50 | 0.1C×16h | 1-4h | 0.2C to 1.0V/cell |

Cycle 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3 h.


JJJ reserves the right to alter or amend the design, model and specification without prior notice.

JIANGMEN JJJ BATTERY CO.,LTD.

JJJ Battery Co.,LTD.

MODEL No: J-1/2A1100

Description: 1100 mAh SIZE NI-MH A







Dimensions(without Tube) (mm)

| | |
|---|------------|
| D | 16.30±0.10 |
| d | 8.50±0.08 |
| H | 27.40±0.40 |
| h | 26.80±0.50 |

Specification

| | | |
|--|-----------|---------------------------------------|
| Nominal Capacity | | 1100 mAh |
| Nominal Voltage | | 1.2 V |
| Charge current | Standard | 110 mA |
| | Fast | 550 mA |
| Charge time | Standard | 16 Hrs |
| | Fast | 2.4 Hrs |
| Ambient Temperature | Charge | Standard: 0°C~45°C Fast: 10°C~45°C |
| | Discharge | -20°C~60°C |
| | Storage | -20°C~55°C |
| Internal Impedance(mΩ) (After Charge) | | ≤ 35 |
| Weight | | 19.5 g |

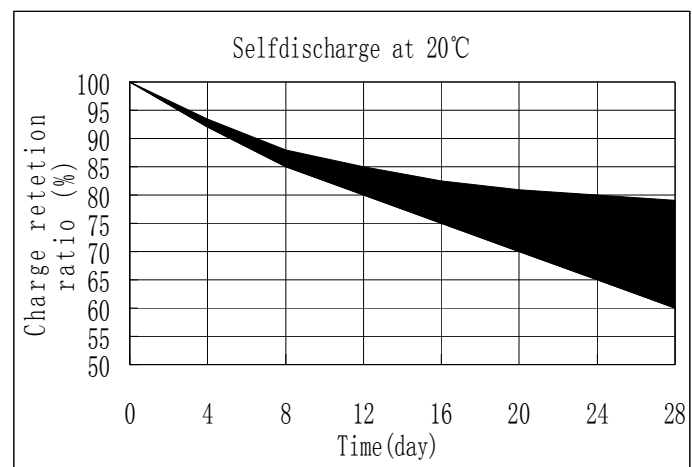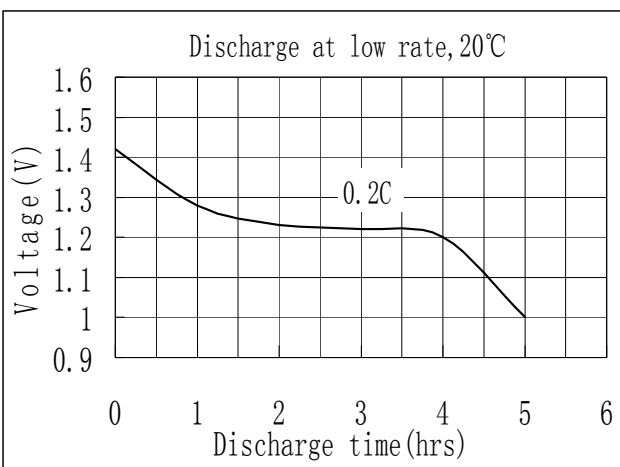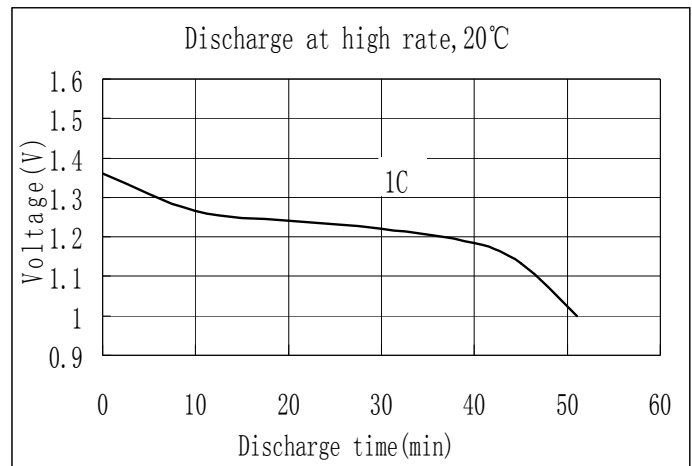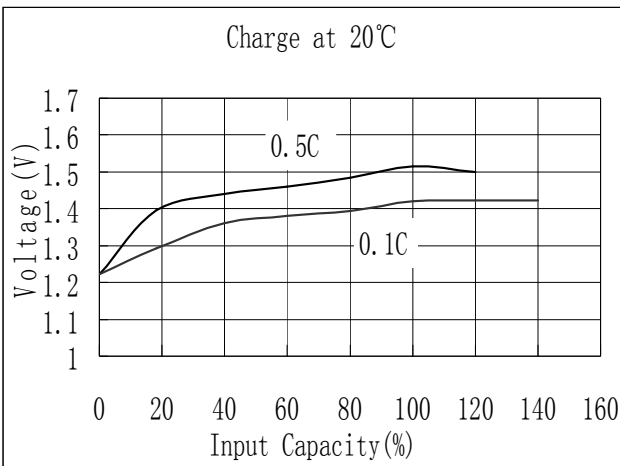

JJJ reserves the right to alter or amend the design, model and specification without prior notice.

JIANGMEN JJJ BATTERY CO.,LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Packs](#) category:

Click to view products by [JJJ](#) manufacturer:

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)
[U10](#)