

TECHNICAL DATA

BASIC DATA

Rated voltage	12	V
20hr capacity at end voltage 1,75V/cell at 25°C	18	Ah
Internal resistance (fully charged battery) at 25°C	8,5	mΩ

DIMENSIONS

Length	181(±1)	mm
Width	76(±1)	mm
Height	167(±1)	mm
(Height with terminals)	167(±1)	mm
Weight	5,67	kg

TERMINALS

Faston	F5	mm
--------	----	----

OPERATION TEMPERATURE RANGE

Storage	-15°C to +40°C
Charge	-15°C to +40°C
Discharge	-15°C to +50°C

STORAGE

Selfdischarge after 3 months at 20°C	6	%
Selfdischarge after 6 months at 20°C	15	%
Selfdischarge after 12 months at 20°C	37	%

CASE MATERIAL

Standard	ABS (UL.94:HB)
Flame retardant	ABS (UL94:V0)

CHARGE VOLTAGE

Float charge at 25°C	13,65 V ± 0,18 V
Cycle charge at 25°C	14,70 V ± 0,30 V

CHARGE CURRENT

Recommended	1,8	A
Maximum	5,4	A

MAX. DISCHARGE CURRENT

5 sec.	270	A
--------	-----	---

DESIGNED LIFE

BPower designed life at 25°C	up to 8	years
At 20°C according to Eurobat - General Purpose group	10 - 12	years

CYCLE LIFE

At 100% D.O.D.	250	cycles
At 50% D.O.D.	600	cycles

PHOTO

APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

SAFETY



DISCHARGE CHARACTERISTICS

• Constant current (Current [A], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	62,6	38,6	31,9	17,4	9,74	5,98	4,35	3,43	2,96	1,73	0,893
1,80	68,3	41,8	34,6	18,7	10,3	6,23	4,52	3,52	3,02	1,77	0,914
1,75	71,9	44,3	36,3	19,8	10,7	6,39	4,64	3,58	3,07	1,80	0,931
1,70	75,1	46,5	37,7	20,7	11,0	6,53	4,73	3,62	3,11	1,82	0,946
1,65	77,8	48,4	38,8	21,4	11,3	6,64	4,80	3,65	3,14	1,84	0,959
1,60	80,2	50,1	39,7	21,9	11,5	6,72	4,85	3,68	3,16	1,85	0,962

• Constant power (Power [W/cell], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	98,9	67,0	57,2	32,7	18,8	11,9	8,75	6,63	5,82	3,40	1,77
1,80	116	77,1	64,5	35,1	19,8	12,4	9,10	6,93	6,05	3,52	1,83
1,75	128	84,5	69,4	37,7	20,7	12,7	9,33	7,12	6,17	3,60	1,88
1,70	135	89,1	72,5	39,4	21,3	13,1	9,53	7,27	6,27	3,67	1,92
1,65	139	91,7	74,2	40,3	21,8	13,3	9,68	7,38	6,35	3,72	1,95
1,60	141	92,9	75,1	40,8	22,2	13,5	9,78	7,46	6,41	3,75	1,96

F.V. - Final Voltage


DIMENSIONS/TERMINALS

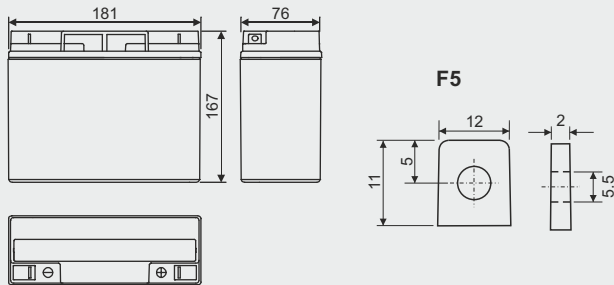


DISCHARGE CHARACTERISTICS

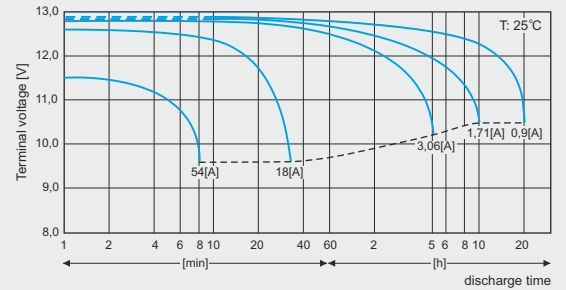


CHARGE CHARACTERISTICS

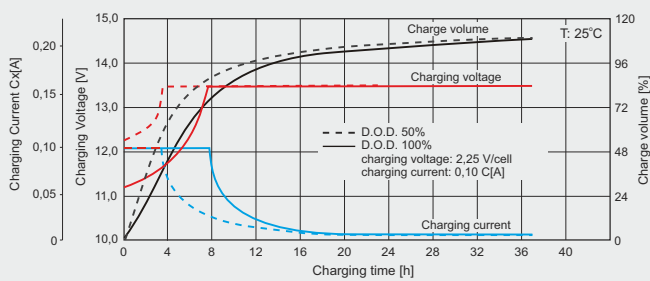


FLOAT LIFE

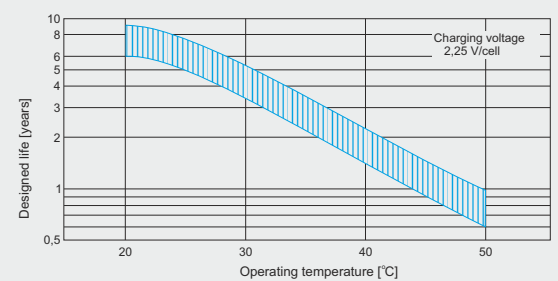


CYCLIC LIFE

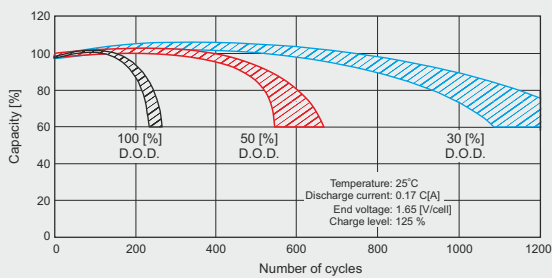

CAPACITY VS. TEMPERATURE

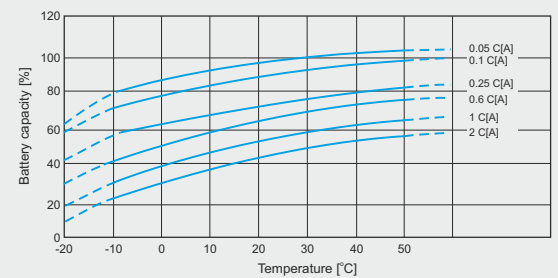

SELFDISCHARGE CHARACTERISTICS

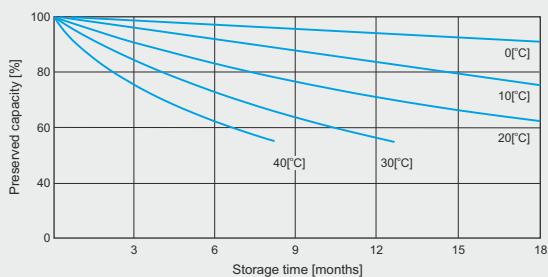

ENVIRONMENTAL INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH AND LIFE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sealed Lead Acid Battery](#) category:

Click to view products by [BPOWER](#) manufacturer:

Other Similar products are found below :

[1109004](#) [0809-0012](#) [0819-0012](#) [0850-0004](#) [0859-0012](#) [0800-0004](#) [LC-R0612P](#) [PS-1250F1](#) [APCRBC123](#) [APCRBC124](#) [LCRA1212P](#) [NP12-12](#) [NP12-6](#) [NP3.2-12](#) [LC-P0612P](#) [LC-R063R4P](#) [LC-R067R2P1](#) [LC-R121R3P](#) [LC-R0612P1](#) [LC-R127R2P1](#) [LC-X1220AP](#) [UP-VW1245P1](#)
[2320296](#) [2320306](#) [2320319](#) [2320322](#) [2320335](#) [2320416](#) [2320429](#) [2908237](#) [RBC32](#) [RBC11A](#) [RBC36-SLT](#)