

TECHNICAL DATA

BASIC DATA

Rated voltage	12	V
20hr capacity at end voltage 1,75V/cell at 25°C	45	Ah
Internal resistance (fully charged battery) at 25°C	7,0	mΩ

DIMENSIONS

Length	197(±1)	mm
Width	165(±1)	mm
Height	170(±1)	mm
(Height with terminals)	170(±1)	mm
Weight	14,7	kg

TERMINALS

INSERT TERMINAL	M6	mm
-----------------	----	----

OPERATION TEMPERATURE RANGE

Storage	-15°C to +40°C
Charge	-15°C to +40°C
Discharge	-15°C to +50°C

STORAGE

Selfdischarge after 3 months at 20°C	6	%
Selfdischarge after 6 months at 20°C	15	%
Selfdischarge after 12 months at 20°C	37	%

CASE MATERIAL

Standard	ABS (UL.94:HB)
Flame retardant	ABS (UL94:V0)

CHARGE VOLTAGE

Float charge at 25°C	13,65 V ± 0,18 V
Cycle charge at 25°C	14,70 V ± 0,30 V

CHARGE CURRENT

Recommended	4,5	A
Maximum	13,5	A

MAX. DISCHARGE CURRENT ANI

5 sec.	540	A
--------	-----	---

DESIGNED LIFE

Bpower designed life at 25°C	up to 8	years
At 20°C according to Eurobat - General Purpose group	10 - 12	years

CYCLE LIFE

At 100% D.O.D.	250	cycles
At 50% D.O.D.	600	cycles

PHOTO



APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

SAFETY



DISCHARGE CHARACTERISTICS

• Constant current (Current [A], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	127	79,5	60,3	31,7	24,6	12,9	10,3	8,20	6,97	4,10	2,15
1,80	153	95,6	71,0	37,3	26,1	13,7	10,9	8,70	7,40	4,35	2,28
1,75	171	107	78,3	41,1	27,0	14,2	11,3	9,00	7,65	4,50	2,36
1,70	183	114	83,1	43,6	27,7	14,6	11,5	9,22	7,84	4,61	2,42
1,65	190	118	85,6	45,0	28,2	14,8	11,8	9,40	7,99	4,70	2,47
1,60	193	121	87,0	45,7	28,4	14,9	11,9	9,48	8,06	4,74	2,49

• Constant power (Power [W/cell], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	233	148	116	62,0	48,8	25,7	20,5	16,4	14,0	8,23	4,34
1,80	280	178	136	73,0	51,8	27,3	21,8	17,4	14,9	8,74	4,61
1,75	314	200	150	80,5	53,6	28,2	22,5	18,0	15,4	9,04	4,76
1,70	336	214	159	85,4	54,9	28,9	23,1	18,4	15,7	9,26	4,88
1,65	347	221	164	88,1	55,9	29,5	23,5	18,8	16,0	9,44	4,98
1,60	354	225	167	89,4	56,4	29,7	23,7	19,0	16,2	9,52	5,02

F.V. - Final Voltage


DIMENSIONS/TERMINALS




DISCHARGE CHARACTERISTICS

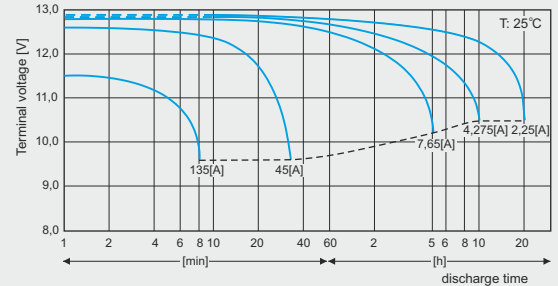


CHARGE CHARACTERISTICS

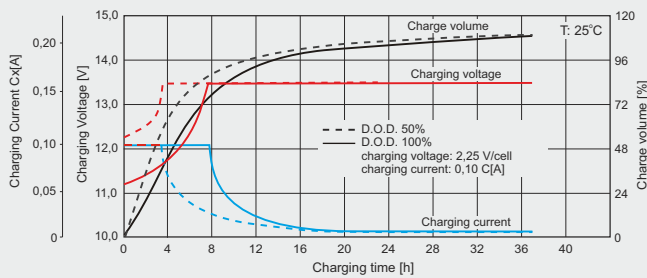


FLOAT LIFE

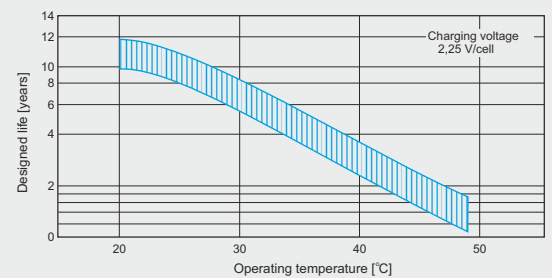


CYCLIC LIFE

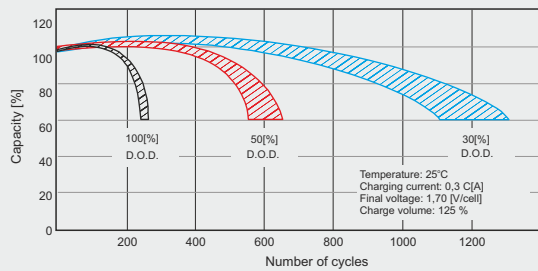

CAPACITY VS. TEMPERATURE

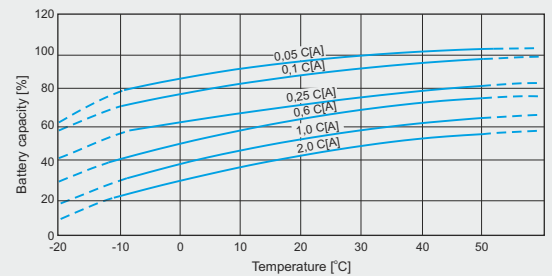

SELFDISCHARGE CHARACTERISTICS

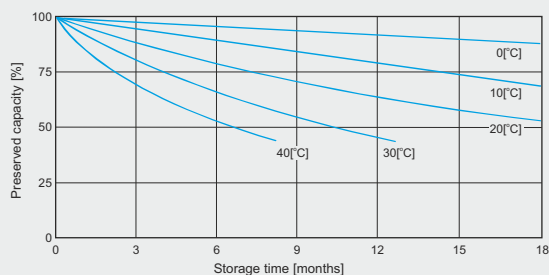

DBAJMY O NASZE ŚRODOWISKO

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH AND LIFE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sealed Lead Acid Battery](#) category:

Click to view products by [BPOWER](#) manufacturer:

Other Similar products are found below :

[1109004](#) [0809-0012](#) [0819-0012](#) [0850-0004](#) [0859-0012](#) [0800-0004](#) [LC-R0612P](#) [PS-1250F1](#) [APCRBC123](#) [APCRBC124](#) [LCRA1212P](#) [NP12-12](#) [NP12-6](#) [NP3.2-12](#) [LC-P0612P](#) [LC-R063R4P](#) [LC-R067R2P1](#) [LC-R121R3P](#) [LC-R0612P1](#) [LC-R127R2P1](#) [LC-X1220AP](#) [UP-VW1245P1](#)
[2320296](#) [2320306](#) [2320319](#) [2320322](#) [2320335](#) [2320416](#) [2320429](#) [2908237](#) [RBC32](#) [RBC11A](#) [RBC36-SLT](#)