

TECHNICAL DATA

BASIC DATA

Rated voltage	12	V
20hr capacity at end voltage 1,75V/cell at 25°C	9	Ah
Internal resistance (fully charged battery at 25°C)	14	mΩ

DIMENSIONS

Length	151(±1)	mm
Width	65(±1)	mm
Height	94(±1)	mm
(Height with terminals)	99(±1)	mm
Weight	2,7	kg

TERMINALS

INSERT TERMINAL	T2	-
-----------------	----	---

OPERATION TEMPERATURE RANGE

Storage	-15°C to +40°C
Charge	-15°C to +40°C
Discharge	-15°C to +50°C

STORAGE

Selfdischarge after 3 months at 20°C	10	%
Selfdischarge after 6 months at 20°C	20	%
Selfdischarge after 12 months at 20°C	40	%

CASE MATERIAL

Standard	ABS (UL.94:HB)
Flame retardant	ABS (UL94:V0)

CHARGE VOLTAGE

Float charge at 25°C	13,50V ± 0,30 V
Cycle charge at 25°C	14,40 V ± 0,60 V

CHARGE CURRENT

Recommended	0,90	A
Maximum	2,55	A

MAX. DISCHARGE CURRENT

5 sec.	130	A
--------	-----	---

DESIGNED LIFE

Bpower designed life at 25°C	up to 8	lat
At 20°C according to Eurobat - General Purpose group	10 - 12	lat

CYCLE LIFE

At 100% D.O.D.	300	cykli
At 50% D.O.D.	600	cykli

PHOTO

APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

SAFETY



DISCHARGE CHARACTERISTICS

• Constant (Current [A], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	29,9	18,7	14,0	7,92	4,90	2,57	2,06	1,65	1,40	0,784	0,413
1,80	32,0	20,0	14,6	8,28	5,07	2,66	2,13	1,71	1,45	0,811	0,427
1,75	34,3	21,5	15,5	8,75	5,18	2,72	2,18	1,75	1,48	0,829	0,436
1,70	36,0	22,5	16,2	9,16	5,24	2,75	2,21	1,76	1,50	0,838	0,441
1,65	37,7	23,6	16,9	9,57	5,27	2,77	2,22	1,77	1,51	0,842	0,443
1,60	39,5	24,7	17,6	9,98	5,29	2,78	2,23	1,78	1,52	0,847	0,446

• Constant power (Power [W/cell], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	55,8	35,8	27,4	15,7	9,76	5,15	4,15	3,33	2,83	1,59	0,836
1,80	84,2	60,3	45,3	28,0	15,9	8,60	6,15	4,97	4,35	2,55	1,31
1,75	89,3	63,0	47,2	29,0	16,6	9,02	6,53	5,22	4,51	2,62	1,35
1,70	94,8	65,3	48,5	30,0	17,2	9,22	6,68	5,37	4,65	2,66	1,37
1,65	99,7	67,5	49,8	30,7	17,5	9,38	7,10	5,52	4,77	2,70	1,40
1,60	105	68,8	51,0	31,2	17,7	9,52	7,20	5,62	4,83	2,72	1,43

F.V. - Final Voltage


DIMENSIONS/TERMINALS

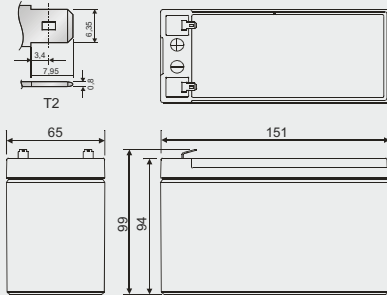


DISCHARGE CHARACTERISTICS

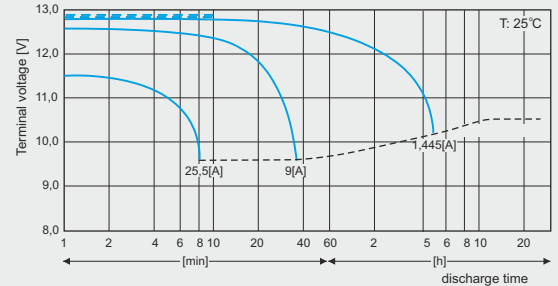


CHARGE CHARACTERISTICS

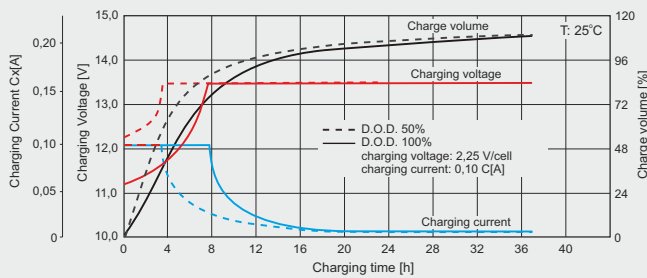


FLOAT LIFE

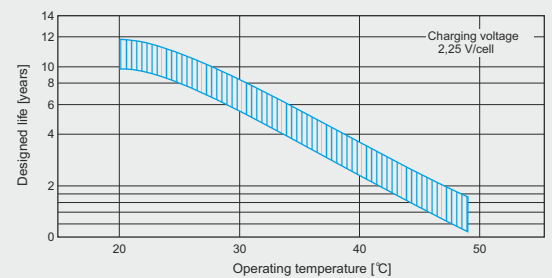


CYCLIC LIFE

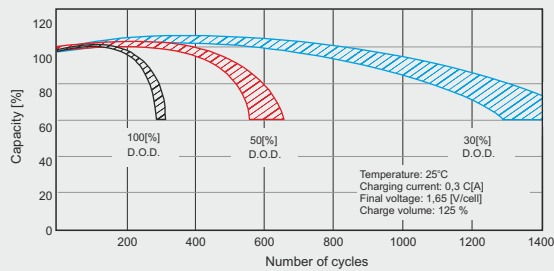

CAPACITY VS. TEMPERATURE

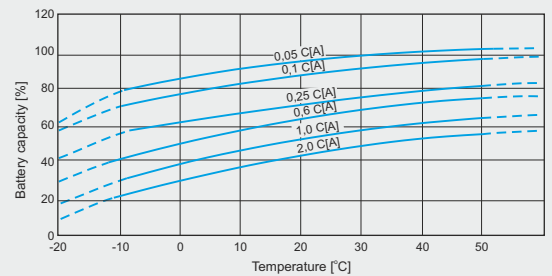

SELFDISCHARGE CHARACTERISTICS

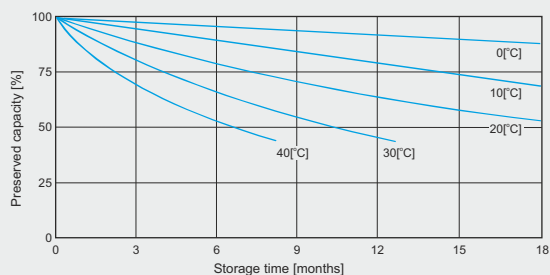

ENVIROMENTAL INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH LIFE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sealed Lead Acid Battery](#) category:

Click to view products by [BPOWER](#) manufacturer:

Other Similar products are found below :

[1109004](#) [0809-0012](#) [0819-0012](#) [0850-0004](#) [0859-0012](#) [0800-0004](#) [LC-R0612P](#) [PS-1250F1](#) [APCRBC123](#) [APCRBC124](#) [LCRA1212P](#) [NP12-12](#) [NP12-6](#) [NP3.2-12](#) [LC-P0612P](#) [LC-R063R4P](#) [LC-R067R2P1](#) [LC-R121R3P](#) [LC-R0612P1](#) [LC-R127R2P1](#) [LC-X1220AP](#) [UP-VW1245P1](#)
[2320296](#) [2320306](#) [2320319](#) [2320322](#) [2320335](#) [2320416](#) [2320429](#) [2908237](#) [RBC32](#) [RBC11A](#) [RBC36-SLT](#)