

EP type batteries are made in AGM technology and are constructed by plates, separators, safety valves and a container. Since the electrolyte is held by a glass-mat separator and plates, the batteries can be used in any chosen position without the risk of leakage. EP type batteries have a pressure relief valves that allows safe dispersal of any excess pressure inside the cell (VRLA). Due to advantages as sealed construction, maintenance free, low internal resistance and long term storage, EP batteries are the base of the emergency power supplying.




### TECHNICAL DATA

Nominal voltage	6 V	
Nominal capacity	12 Ah / C <sub>20</sub>	
Cell per unit	3	
Technology	AGM	
Design life	6~9 years @ 20°C*	
	5 years @ 25°C	
Dimensions	height	100,0 mm
	length	151,0 mm
	width	50,0 mm
Weight	~1,98 kg	
Capacity @ 25°C	20h 600mA @1,75V/cell	12,0 Ah
	10h 1400mA @1,75V/cell	11,4 Ah
	5h 2040mA @1,75V/cell	10,2 Ah
	1h 7866mA @1,60V/cell	7,87 Ah
Ambient nominal temperature range	charge	0°C ~ 40°C
	discharge	-20°C ~ 50°C
	storage	-20°C ~ 40°C
Internal resistance @ fully charge battery	≤9 mΩ	
Charging voltage @ 20°C	standby use	6,75V to 6,9V (-9 mV/°C)
	cycle use	7,2 V to 7,5V (-12 mV/°C)
Charging current	recommended	1,2A
	maximum	3,6 A
Maximum discharge current (for 5 sec)	180 A	
Capacity retention during storage @ 20°C (self discharge)	after 1 month	97 %
	after 6 months	80 %
	after 12 months	63 %
Container material	standard	ABS UL 94-HB
	optional	ABS UL 94-V0**
Terminal	faston F1	T1
Terminal hardware initial torque	-	


### APPLICATIONS

- uninterruptible power supplies (UPS)
- emergency lighting systems
- telecommunication PABX
- cash registers and fiscal printers
- fire and security systems
- solar powered systems
- medical equipment
- mobile and portable equipment - cycle use
- measuring devices

### DIMENSIONS

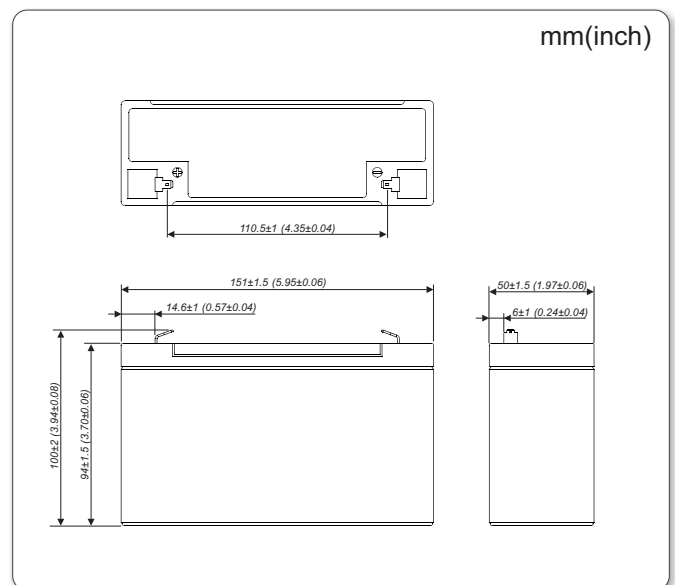

### TERMINALS

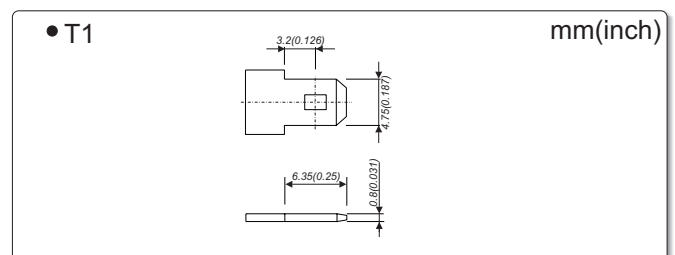

\* - According to Eurobat (General Purpose group) \*\* - Flame-retardant

### NO TRANSPORT RESTRICTED

Not restricted for air, surface and water transport. Classified as non-hazardous material (IATA/ICAO Special Provision A67, DOT-CFR Title 49 parts 171-189, IMDG amendment 27)

### DISCHARGE CHARACTERISTICS

#### • Constant current (Current [A], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,80	39,09	28,12	22,26	12,91	8,513	7,339	4,002	2,347	1,736	1,353	1,123
1,75	46,07	30,46	23,28	13,40	8,788	7,559	4,103	2,389	1,760	1,374	1,140
1,70	48,95	31,55	24,00	13,70	8,962	7,695	4,158	2,408	1,771	1,381	1,146
1,65	51,15	32,31	24,55	13,89	9,072	7,788	4,196	2,420	1,776	1,385	1,149
1,60	52,84	32,96	25,04	14,03	9,164	7,866	4,230	2,430	1,780	1,386	1,149
1,50	54,96	33,62	25,54	14,17	9,255	7,944	4,264	2,437	1,780	1,386	1,149

#### • Constant power (Power [W/cell], 25°C / 77°F)


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	50 min	1hr	2hr	4hr	6hr	8hr	10hr
1,85	66,23	57,03	49,73	40,30	23,90	17,37	13,933	9,767	7,733	5,667	4,567
1,80	72,30	61,27	53,23	42,67	25,37	18,30	14,567	10,167	8,000	5,833	4,700
1,75	83,70	69,37	57,67	44,63	26,33	18,93	15,000	10,467	8,200	5,933	4,767
1,70	88,93	72,80	59,73	46,00	26,93	19,30	15,267	10,633	8,300	6,000	4,800
1,65	92,93	75,40	61,17	47,07	27,33	19,57	15,433	10,733	8,400	6,033	4,833
1,60	96,00	77,40	62,40	48,00	27,60	19,77	15,600	10,833	8,467	6,067	4,867

F.V. - Final voltage


## Battery life characteristics of standby use

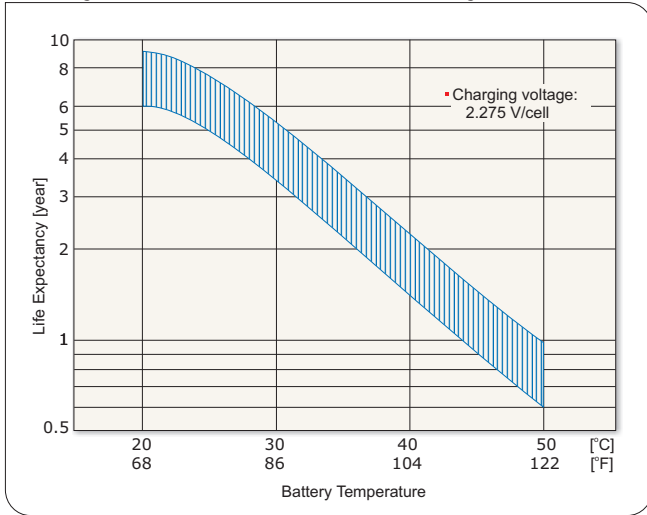


## Battery life characteristics of cycle use

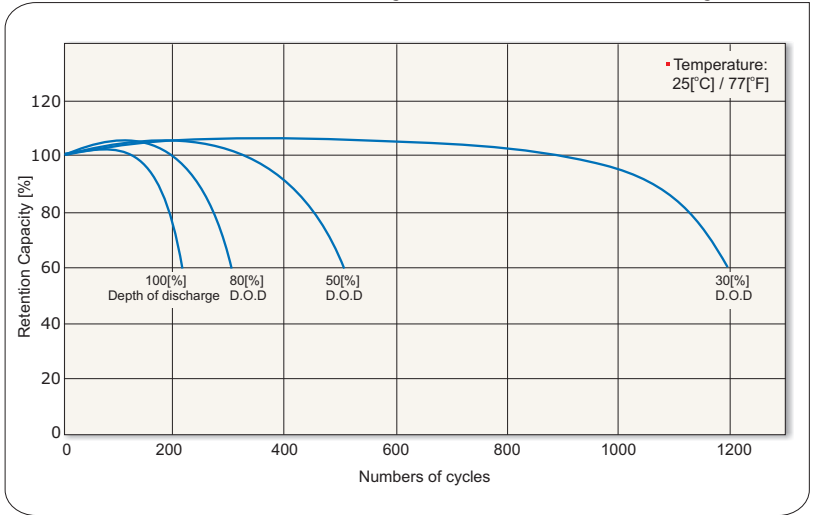


## Battery discharge characteristics

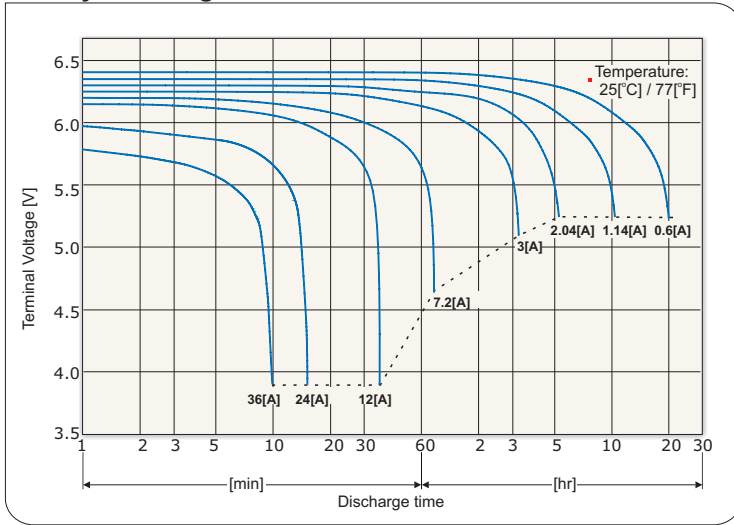


## Battery self discharge characteristics

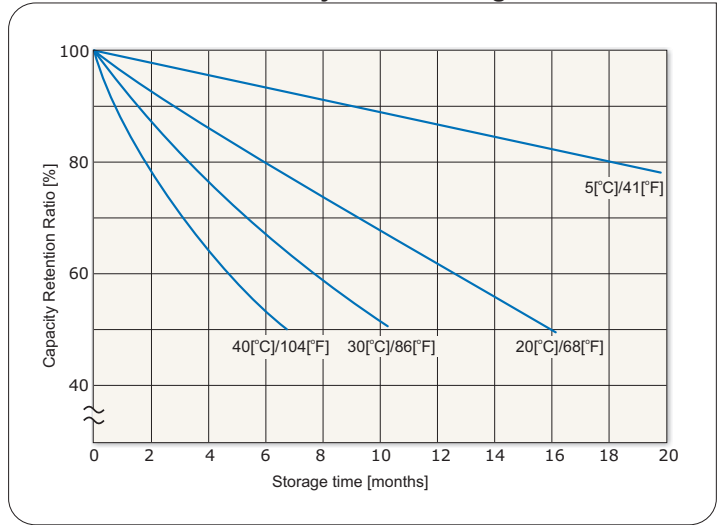

## Battery charging characteristics for the standby use

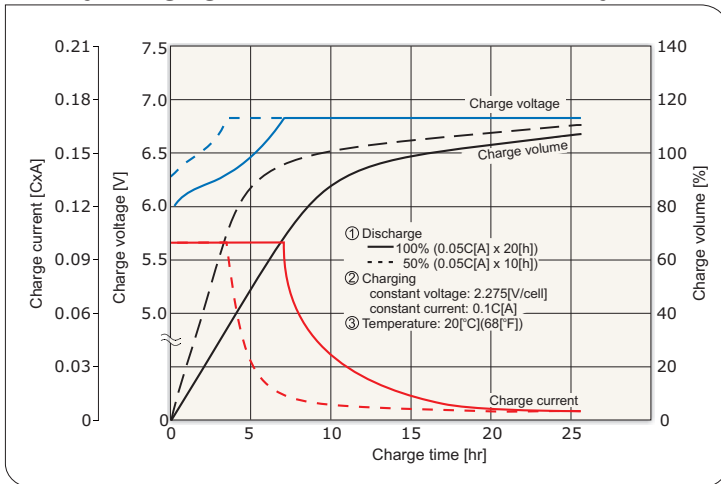

## Battery charging characteristics for the cycle use

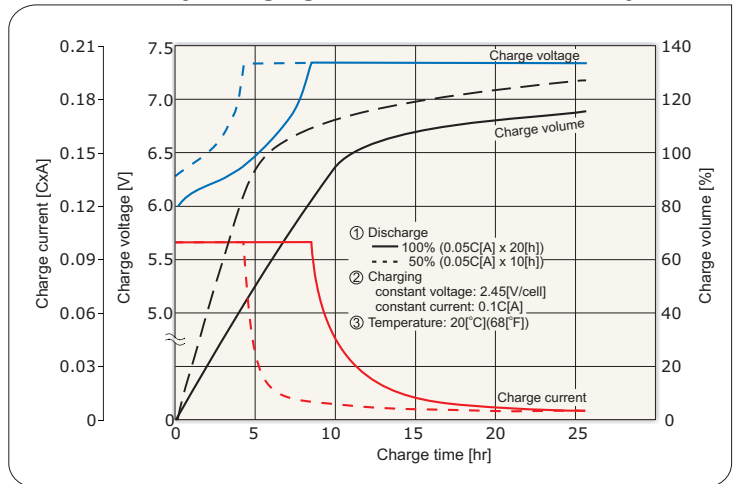

## Battery discharge current and final discharge voltage

Discharge current [A]	2.4 > I	2.4 ≤ I < 6	6 ≤ I < 12	12 ≤ I
Final discharge voltage [V/cell]	1.75	1.70	1.55	1.30



\*) C - Capacity

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sealed Lead Acid Battery](#) category:*

*Click to view products by [EUROPOWER](#) manufacturer:*

Other Similar products are found below :

[1109004](#) [0809-0012](#) [0819-0012](#) [0850-0004](#) [0859-0012](#) [0800-0004](#) [LC-R0612P](#) [PS-1250F1](#) [APCRBC123](#) [APCRBC124](#) [LCRA1212P](#) [NP12-12](#) [NP12-6](#) [NP3.2-12](#) [LC-P0612P](#) [LC-R063R4P](#) [LC-R067R2P1](#) [LC-R121R3P](#) [LC-R0612P1](#) [LC-R127R2P1](#) [LC-X1220AP](#) [UP-VW1245P1](#)  
[2320296](#) [2320306](#) [2320319](#) [2320322](#) [2320335](#) [2320416](#) [2320429](#) [2908237](#) [RBC32](#) [RBC11A](#) [RBC36-SLT](#)