

ADAM-4021

ADAM-4015

ADAM-4024

1-ch Analog Output Module

6-ch RTD Module with Modbus


4-ch Analog Output Module with Modbus



ADAM-4021



ADAM-4015

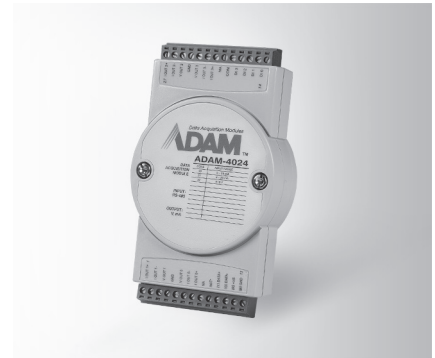

ADAM-4024



Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 1.4 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

Analog Output

- Channels 1
- Output Impedance 0.5 Ω
- Output Range 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- Output Type mA, V
- Accuracy ±0.1% of FSR for current output
±0.2% of FSR for voltage output
- Current Load Resistor 0 to 500 Ω (source)
- Resolution 12-bit
- Isolation Voltage 3,000 V_{DC}
- Programmable Output Slope 0.125 ~ 128 mA/sec.
0.0625 ~ 64.0 V/sec.
- Readback Accuracy ±1% of FSR
- Span Temperature Coefficient ±25 ppm/°C
- Zero Drift
Voltage output: ±30 μV/°C
Current output: ±0.2 μA/°C

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 1.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 s) & Communication
- Supported Protocols ASCII command and Modbus/RTU
- Burnout Detection Yes

Analog Input

- Channels 6 differential
- Input Connections 2, 3-wire
- Input Impedance 10 MΩ
- Input Type Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges
 - Pt 100 RTD:
 - Pt -50°C to 150°C
 - Pt 0°C to 100°C
 - Pt 0°C to 200°C
 - Pt 0°C to 400°C
 - Pt -200°C to 200°C
 - IEC RTD 100 ohms (a = 0.00385)
 - JIS RTD 100 ohms (a = 0.00392)
 - Pt 1000 RTD
 - Pt -40°C to 160°C
 - Balco 500 RTD
 - 30°C to 120°C
 - Ni 50 RTD
 - Ni -80°C to 100°C
 - Ni 508 RTD
 - Ni 0°C to 100°C
 - BA1
 - 200°C to 600°C
- Accuracy ±0.1% (Typical)
- CMR @ 50/60 Hz 120 dB
- Span Drift ± 25 ppm/°C
- Zero Drift ± 3 μV/°C

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 3 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Analog Output

- Channels 4
- Output Impedance 0.5 Ω
- Output Range 0 ~ 20 mA, 4 ~ 20mA, ±10 V
- Output Type mA, V (Differential)
- Accuracy ±0.1 % of FSR for current output
±0.1 % of FSR for voltage output
- Current Load Resistor Max. 500 Ω (source)
- Voltage Load Resistor Min. 1K Ω
- Resolution 12-bit
- Isolation Voltage 3,000 V_{DC}
- Programmable Output Slope 0.125 ~ 128 mA/sec.
0.0625 ~ 64.0 V/sec.
- Span Temperature Coefficient ±25 ppm/°C
- Zero Drift
Voltage output: ±30 μV/°C
Current output: ±0.2 μA/°C

Digital Input

- Channels 4
- Input Level Logic level 0: 1 V max.
Logic level 1: 10 ~ 30 V_{DC}
- Isolation Voltage 3,000 V_{DC}

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}

Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 185°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- ADAM-4021 1-ch Analog Output Module
- ADAM-4015 6-ch RTD Module with Modbus
- ADAM-4024 4-ch Analog Output Module with Modbus

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)