


Type: **A-PKZ0(24VDC)** Article No.: **073200** 





Ordering information	
Connection technique	Screw terminals
For use with	PKZM0 PKZM4 PKZM0-T PKM0 PKZM01

## **Contact sequence**



Notes concerning the product group





#### Accessories


- 1 Motor-protective circuit-breaker
- 2 Compact starters, (high-capacity) compact starters

#### Page

General						
Terminal capacities						
Solid or flexible conductor with ferrule		mm <sup>2</sup>	1 × (0.75 – 2.5) 2 × (0.75 – 2.5)			
Solid or stranded		AWG	1 × (18 – 14) 2 × (18 – 14)			
Main conducting paths						
Rated operating voltage	U <sub>e</sub>	V AC	42 – 480			
Rated operating voltage	<i>U</i> e	V DC	24 – 250			
Operating range						
AC		× Us	0,7 – 1,1			
DC		× Us	0,7 – 1,1			
Power consumption						
AC						
Pick-up AC	Pick-up	VA	5			
Sealing AC	Sealing	VA	3			
DC						

Dimensions			
Sealing DC	Sealing	W	3
Pull-in DC	Pick-up	W	3

### **Dimensions**

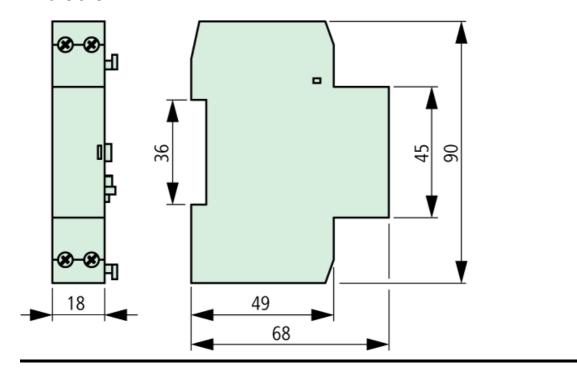

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn E-Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net Copyright 2005 by Moeller GmbH. Subject to modifications. HPL-C2005GB-INT V3.0

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for eaton manufacturer:

Other Similar products are found below:

BK-MDL-3-R BK1-S506-500-R BK1-S506-6-3-R BK1-S506-2-R MPI4040R4-1R5-R BK/MDA-15 TDC600-10A 8946K153 8961K155 M22-D-R-GB0/K11 M22-L-R/R 630NHG3B 63ET 6422 6580 CTX20-16-52LP-R CWL530FI CXM/CO/GP/R/BB 6HD36 714125 MBO-2 7314K36 7321K2 F02A-1-1/2A F02A-1-1/2AS F02A-1AS F02A-2AS F02A-3/4A F03A250V12A F03B125V4A MCR-4 MDA-2-8/10-R MDA-30A MDA-V-1/16 F60C500V10AS F60C500V15AS 7563K84 7634K36 MDQ-3/16 MDQ-7/10 MDQ-V-1/10 MDQ-V-1/4 MDQ-V-1/16 M