

**CAB CAB PC 504020 T**



Sample photo

**Order symbol:** CAB PC 504020 T  
**Product nbr:** 8113060  
**Description:** Cabinet, PC  
**Remarks:** Latches on the long side

**EAN:** 6418074020338  
**EI. number:**  
 Finland: 3424170  
 Electric No. 8212020278  
 Denmark:  
 Electric No. Italy: 7822055  
 Electric No. Sweden: 2539951

Including: Cabinet base, door with PUR gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

| Dimensions: | Length | Width | Height | Accessories:                          |
|-------------|--------|-------|--------|---------------------------------------|
| mm:         | 500    | 400   | 200    | EKIV 37<br>DIN-35 Mounting rail       |
| inch:       | 19.7   | 15.7  | 7.9    | DS35370E1<br>DIN-35 Mounting rail     |
|             |        |       |        | EKIV 47<br>DIN-35 Mounting rail       |
|             |        |       |        | DS35470E1<br>DIN-35 Mounting rail     |
|             |        |       |        | FP A 54<br>Swing-out door/Front plate |
|             |        |       |        | MB 12225 AL<br>Swing door set         |
|             |        |       |        | FP 54<br>Front plate                  |
|             |        |       |        | FP 18X2-54<br>Front plate             |
|             |        |       |        | DRF 54<br>DIN rail frame set          |


| Materials:              |                      |
|-------------------------|----------------------|
| <b>Material:</b>        | Polycarbonate        |
| <b>Base colour:</b>     | RAL 7035 -light grey |
| <b>Cover colour:</b>    | Smoked grey          |
| <b>Gasket material:</b> | EPDM                 |

| Temperatures:                       |                |
|-------------------------------------|----------------|
| <b>Temperature °C (short term):</b> | -40 ... 120 °C |
| <b>Temperature °C (continuous):</b> | -40 ... 80 °C  |
| <b>Temperature °F (short term):</b> | -40 ... 250 °F |
| <b>Temperature °F (continuous):</b> | -40 ... 175 °F |

| Accessories: |                |
|--------------|----------------|
| EKIV 54      | Mounting plate |

| Rating:                                |                   |
|--|-------------------|
| Ingress Protection (EN 60529):         | IP65              |
| Impact Resistance (EN 62262):          | IK08              |
| Electrical insulation:                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1                 |
| UV resistance:                         | UL 508            |
| Flammability Rating:                   | UL 746C 5V        |
| Glow Wire Test (IEC 695-2-1) °C:       | 960               |

| Certificates:                    |  |
|----------------------------------|--|
| Germanischer Lloyd (GL)          |  |
| SGS Fimko                        |  |
| Lloyds Register of Shipping (LR) |  |
| Gost R                           |  |

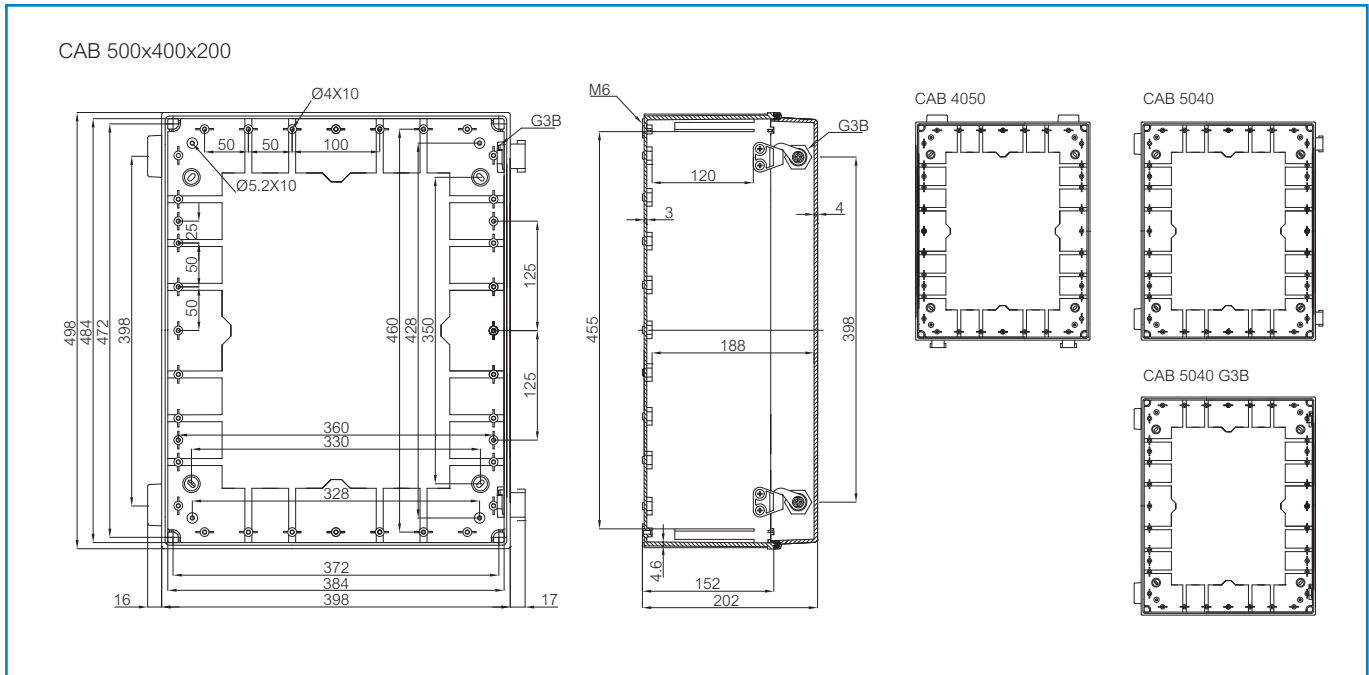

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [fibox manufacturer](#):*

Other Similar products are found below :

[MPS ARCA 5040](#) [PCM 175/75 T](#) [ABQ3 364015](#) [EKMVT](#) [CAB ABSQ 302017G](#) [CAB P 302017](#) [CAB PC 303018 G3B](#) [CAB PCQ 404017 T](#)  
[ABS 150/125 HG](#) [PCT 081206](#) [CAB ABS 302018 G](#) [CAB PC 303018 T3B](#) [CAB PCQ 303017 T](#) [CAB PCQ 404017 G](#) [PC 5628 13 T](#) [TAM](#)  
[090706 MC](#) [ARCA 705030](#) [ARCA 406021](#) [MP 6040](#) [ARCA 405021](#) [ARCA 507030](#) [ARCA 604021](#) [ARCA 806030](#) [EKOE 130 G](#) [2539543](#)  
[DRS ARCA 403015](#) [DRS ARCA 304021](#) [DRS ARCA 302015](#) [DRS ARCA 203015](#) [PC 100/125 HG](#) [PC 100/75 HT](#) [PC 300/150 ZG](#) [PCM](#)  
[175/150 G](#) [PCM 125/100 G](#) [PC 125/125 HG](#) [PC 200/63 HT](#) [ABS D 65 G](#) [CAB PC 302018 G](#) [CAB ABSQ 403017 G](#) [CAB PC 302018 G3B](#)  
[7094450](#) [PC 1919 13 T-2FSH](#) [PC 200/150 HT](#) [9821007](#) [EKPE 130 G ENCLOSURE](#) [ABS C 85 G](#) [FEX 3828 18 T ENCLOSURE](#) [FP 12017](#)  
[SET](#) [CAB PC 302018 G CABINET](#) [EKIV 33 MOUNTING PLATE](#)