



### FEATURES:

- SMD Package
- Single Output Models
- Low Ripple and Noise
- Industry Standard Pinout
- Input / Output Isolation 1500 & 3000 VDC
- Operating Temperature -40°C to +105°C
- RoHS Compliant
- Continuous Short Circuit Protection

### Models Single output



Model	Input Voltage (V)	Output Voltage (V)	Output Current Max / Min (mA)	Isolation (VDC)	Input Current Max   No Load (mA)	Max Capacitive Load (µF)	Efficiency (%)
AM1LS-0303S-NZ‡	2.97-3.63	3.3	303 / 30	1500	415   25	220	69
AM1LS-0305S-NZ‡	2.97-3.63	5	200 / 20	1500	404   25	220	74
AM1LS-0309S-NZ‡	2.97-3.63	9	111 / 12	1500	404   25	220	80
AM1LS-0312S-NZ‡	2.97-3.63	12	84 / 9	1500	404   25	220	80
AM1LS-0315S-NZ‡	2.97-3.63	15	67 / 7	1500	404   25	220	80
AM1LS-0324S-NZ‡	2.97-3.63	24	42 / 4	1500	404   25	220	80
AM1LS-0503S-NZ**	4.5-5.5	3.3	303 / 30	1500	286   10	2400	74
AM1LS-0505S-NZ**	4.5-5.5	5	200 / 20	1500	286   10	2400	82
AM1LS-0505S-JZ**	4.5-5.5	5	200 / 20	1500	286   10	2400	82
AM1LS-0506S-NZ	4.5-5.5	6	167 / 17	1500	250   20	220	80
AM1LS-0509S-NZ**	4.5-5.5	9	111 / 12	1500	254   20	1000	80
AM1LS-0512S-NZ**	4.5-5.5	12	84 / 9	1500	254   20	560	80
AM1LS-0515S-NZ**	4.5-5.5	15	67 / 7	1500	254   30	560	80
AM1LS-0524S-NZ**	4.5-5.5	24	42 / 4	1500	254   30	220	80
AM1LS-1203S-NZ	10.8-13.2	3.3	303 / 30	1500	111   15	220	75
AM1LS-1205S-NZ	10.8-13.2	5	200 / 20	1500	104   15	220	80
AM1LS-1209S-NZ	10.8-13.2	9	111 / 12	1500	104   15	220	80
AM1LS-1212S-NZ	10.8-13.2	12	84 / 9	1500	103   15	220	81
AM1LS-1215S-NZ	10.8-13.2	15	67 / 7	1500	103   15	220	81
AM1LS-1224S-NZ	10.8-13.2	24	42 / 4	1500	103   15	220	81
AM1LS-1505S-NZ	13.5-16.5	5	200 / 20	1500	82   10	220	80
AM1LS-1509S-NZ	13.5-16.5	9	111 / 12	1500	82   10	220	80
AM1LS-1515S-NZ	13.5-16.5	15	67 / 7	1500	82   10	220	81
AM1LS-2403S-NZ‡	21.6-26.4	3.3	303 / 30	1500	52   7	220	71
AM1LS-2405S-NZ‡	21.6-26.4	5	200 / 20	1500	52   7	220	80
AM1LS-2409S-NZ‡	21.6-26.4	9	111 / 12	1500	52   7	220	80
AM1LS-2412S-NZ‡	21.6-26.4	12	84 / 9	1500	52   7	220	80
AM1LS-2415S-NZ‡	21.6-26.4	15	67 / 7	1500	51   7	220	81
AM1LS-2424S-NZ‡	21.6-26.4	24	42 / 4	1500	51   7	220	81
AM1LS-0303SH30-NZ	2.97-3.63	3.3	303 / 30	3000	415   25	220	73
AM1LS-0305SH30-NZ	2.97-3.63	5	200 / 20	3000	388   25	220	78
AM1LS-0503SH30-NZ**	4.5-5.5	3.3	303 / 30	3000	286   10	2400	74
AM1LS-0505SH30-NZ**	4.5-5.5	5	200 / 20	3000	286   10	2400	82
AM1LS-0509SH30-NZ**	4.5-5.5	9	111 / 12	3000	254   20	1000	83
AM1LS-0512SH30-NZ**	4.5-5.5	12	84 / 9	3000	254   20	560	83
AM1LS-0515SH30-NZ**	4.5-5.5	15	67 / 7	3000	254   30	560	83
AM1LS-0524SH30-NZ**	4.5-5.5	24	42 / 4	3000	254   30	220	85
AM1LS-1203SH30-NZ	10.8-13.2	3.3	303 / 30	3000	111   15	220	75
AM1LS-1205SH30-NZ	10.8-13.2	5	200 / 20	3000	104   15	220	80
AM1LS-1209SH30-NZ	10.8-13.2	9	111 / 12	3000	104   15	220	80
AM1LS-1212SH30-NZ	10.8-13.2	12	84 / 9	3000	103   15	220	81
AM1LS-1215SH30-NZ	10.8-13.2	15	67 / 7	3000	103   15	220	81
AM1LS-1224SH30-NZ	10.8-13.2	24	42 / 4	3000	103   15	220	81
AM1LS-1515SH30-NZ	13.5-16.5	15	67 / 7	3000	82   10	220	80
AM1LS-2405SH30-NZ‡	21.6-26.4	5	200 / 20	3000	52   7	220	80

AM1LS-2409SH30-NZ‡	21.6-26.4	9	111 / 12	3000	52	7	220	80
AM1LS-2415SH30-NZ‡	21.6-26.4	15	84 / 9	3000	51	7	220	81
AM1LS-2424SH30-NZ‡	21.6-26.4	24	67 / 7	3000	51	7	220	81

## Models

### Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current Max / Min (mA)	Isolation (VDC)	Input Current Max   No Load (mA)	Max Capacitive Load(μF)	Efficiency (%)
AM1LS-0305D-NZ	2.97-3.63	±5	±100 / ±10	1500	415   25	100	78
AM1LS-0312D-NZ	2.97-3.63	±12	±42 / ±5	1500	388   25	100	80
AM1LS-0315D-NZ	2.97-3.63	±15	±33 / ±3	1500	263   20	100	80
AM1LS-0505D-NZ**	4.5-5.5	±5	±100 / ±10	1500	257   10	1200	82
AM1LS-0509D-NZ**	4.5-5.5	±9	±56 / ±6	1500	254   20	470	83
AM1LS-0512D-NZ**	4.5-5.5	±12	±42 / ±5	1500	254   20	220	83
AM1LS-0515D-NZ**	4.5-5.5	±15	±33 / ±3	1500	254   30	220	83
AM1LS-0524D-NZ ‡	4.5-5.5	±24	±21 / ±2	1500	250   20	100	81
AM1LS-1205D-NZ	10.8-13.2	±5	±100 / ±10	1500	111   15	100	75
AM1LS-1209D-NZ	10.8-13.2	±9	±56 / ±6	1500	104   15	100	80
AM1LS-1212D-NZ	10.8-13.2	±12	±42 / ±5	1500	104   15	100	80
AM1LS-1215D-NZ	10.8-13.2	±15	±33 / ±3	1500	103   15	100	81
AM1LS-1224D-NZ	10.8-13.2	±24	±21 / ±2	1500	103   15	100	81
AM1LS-1515D-NZ	13.5-16.5	±15	±33 / ±3	1500	103   15	100	81
AM1LS-2405D-NZ‡	21.6-26.4	±5	±100 / ±10	1500	83   12	100	82
AM1LS-2409D-NZ‡	21.6-26.4	±9	±56 / ±6	1500	52   7	100	82
AM1LS-2412D-NZ‡	21.6-26.4	±12	±42 / ±5	1500	52   7	100	82
AM1LS-2415D-NZ‡	21.6-26.4	±15	±33 / ±3	1500	51   7	100	82
AM1LS-2424D-NZ‡	21.6-26.4	±24	±21 / ±2	1500	51   7	100	82
AM1LS-0305DH30-NZ	2.97-3.63	±5	±100 / ±10	3000	389   25	100	76
AM1LS-0312DH30-NZ	2.97-3.63	±12	±42 / ±5	3000	389   25	100	77
AM1LS-0505DH30-NZ**	4.5-5.5	±5	±100 / ±10	3000	257   10	1200	82
AM1LS-0509DH30-NZ**	4.5-5.5	±9	±56 / ±6	3000	254   20	470	83
AM1LS-0512DH30-NZ**	4.5-5.5	±12	±42 / ±5	3000	254   20	220	83
AM1LS-0515DH30-NZ**	4.5-5.5	±15	±33 / ±3	3000	254   30	220	83
AM1LS-0524DH30-NZ ‡	4.5-5.5	±24	±21 / ±2	3000	250   20	100	81
AM1LS-1205DH30-NZ	10.8-13.2	±5	±100 / ±10	3000	111   15	100	80
AM1LS-1209DH30-NZ	10.8-13.2	±9	±56 / ±6	3000	104   15	100	80
AM1LS-1212DH30-NZ	10.8-13.2	±12	±42 / ±5	3000	104   15	100	81
AM1LS-1215DH30-NZ	10.8-13.2	±15	±33 / ±3	3000	103   15	100	81
AM1LS-1224DH30-NZ	10.8-13.2	±24	±21 / ±2	3000	103   15	100	81
AM1LS-1515DH30-NZ	13.5-16.5	±15	±33 / ±3	3000	83   12	100	81
AM1LS-2405DH30-NZ‡	21.6-26.4	±5	±100 / ±10	3000	82   10	100	82
AM1LS-2409DH30-NZ‡	21.6-26.4	±9	±56 / ±6	3000	52   7	100	82
AM1LS-2412DH30-NZ‡	21.6-26.4	±12	±42 / ±5	3000	52   7	100	82
AM1LS-2415DH30-NZ‡	21.6-26.4	±15	±33 / ±3	3000	51   7	100	82
AM1LS-2424DH30-NZ‡	21.6-26.4	±24	±21 / ±2	3000	51   7	100	82

‡ With Momentary short circuit protection of 1 second

NOTE 1: Add suffix "TR" to a part number when ordering in tape and reel package

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

## Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage Range	3	2.97-3.63		VDC
	5	4.5-5.5		
	12	10.8-13.2		
	15	13.5-16.5		
	24	21.6-26.4		

Absolute Max Input Voltage (1 sec max)	3 Vin 5 Vin 12 Vin 15 Vin 24 Vin		5 9 18 21 30	VDC
Filter	Capacitor			
AM1LS-0505S-JZ input no load current		5	10	mA

### Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O Voltage	60 sec	1500 models 3000 Models		VDC
Resistance	500VDC	>1000		MOhm
Capacitance		20		pF

### Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage Accuracy	100% load (see tolerance chart)	±2.5		%
Short Circuit Protection	Continuous, unless marked with ‡			
Short Circuit Restart	Auto-Recovery			
Line Voltage Regulation	For ±1% of Vin 3.3V models only	±1.2 ±1.5		% of Vin
Load Voltage Regulation (10% - 100% Load)	3.3V	18		%
	5 V	12		
	6 V	10		
	9 V	8		
	12 V	7		
	15 V	6		
Load Voltage Regulation For Part numbers with** (10% - 100% Load)	24 V	5		%
	3.3V	15		
	5 V	10		
	9 V	8		
	12 V	7		
Load Voltage Regulation For Part numbers with** (10% - 100% Load)	15 V	6		%
	24 V	5		
Temperature Coefficient	100% load	±0.03		%/°C
Temperature Coefficient For Part numbers with**	100% load	±0.02		%/°C
Ripple & Noise		60		mV p-p
Ripple & Noise For Part numbers with**	24V output models	30	75	mV p-p
		50	100	

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	100	300	KHz
Switching frequency (for part number with**)	100% load	270		KHz
Operating temperature	With derating above +100	-40 to +105		°C
Storage temperature		-55 to +125		°C
Cooling	Free air convection			
Storage Humidity	Non Condensing		95	% RH
Case material	Epoxy resin (UL94-V0)			
Weight		Single 1.5 Dual 1.8		g
Weight For Part numbers with**		1.4		g
Dimensions (L x W x H)		Single Output 0.50 x 0.44 x 0.28 inches Dual Output 0.60 x 0.44 x 0.28 inches	12.70 x 11.20 x 7.25 mm 15.24 x 11.20 x 7.25 mm	


Dimensions (L x W x H) For Part numbers with**	Single Output 0.52 x 0.44 x 0.28inches 13.20*11.40*7.25 mm	Dual Output 0.60 x 0.44 x 0.28 inches 15.24 x 11.40 x 7.25 mm
MTBF	>3500Khrs (MIL-HDBK -217F, Ground Benign, t=+25°C)hours	
Maximum soldering temperature	1.5mm from case for 10 sec	300 °C
Maximum case temperature		130 °C

## Safety Specifications


Parameters		
Agency approvals	UL 60950-1	cULus (without 15V input and without 3.3V input of dual output models) (Not applicable for all models with suffix JZ)
Standards	EMI - Conducted and radiated emission	EN55022, class B
	Electrostatic Discharge Immunity	IEC 61000-4-2, Contact +/-8kV, Criteria B
Standards for part numbers with suffix JZ	EMI - Conducted and radiated emission	EN55032, class B
	Electrostatic Discharge Immunity	IEC 61000-4-2, Contact +/-4kV, Criteria B

## Pin Out Specifications and Dimensions

Pin	Single
1	- V Input
2	+ V Input
3	No Pin
4	-V Output
5	+V Output
6	No Pin
7	No Pin
8	N.C.

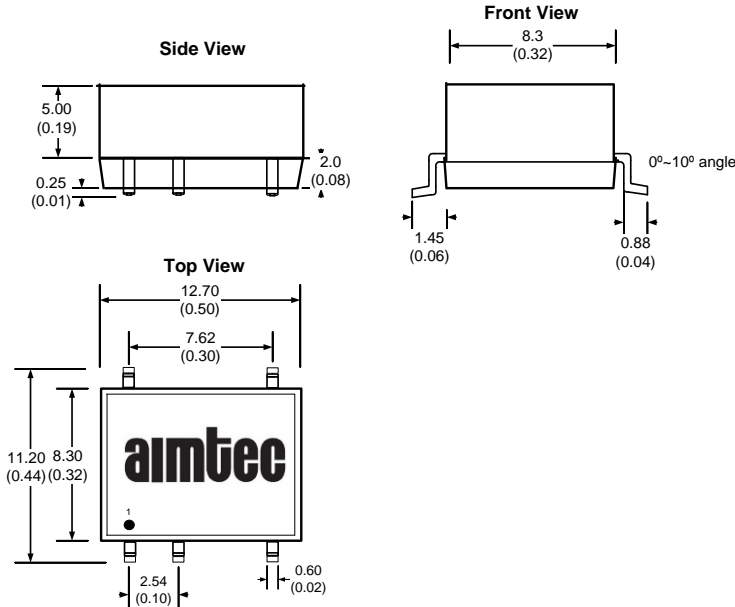


For Single output part numbers with\*\*

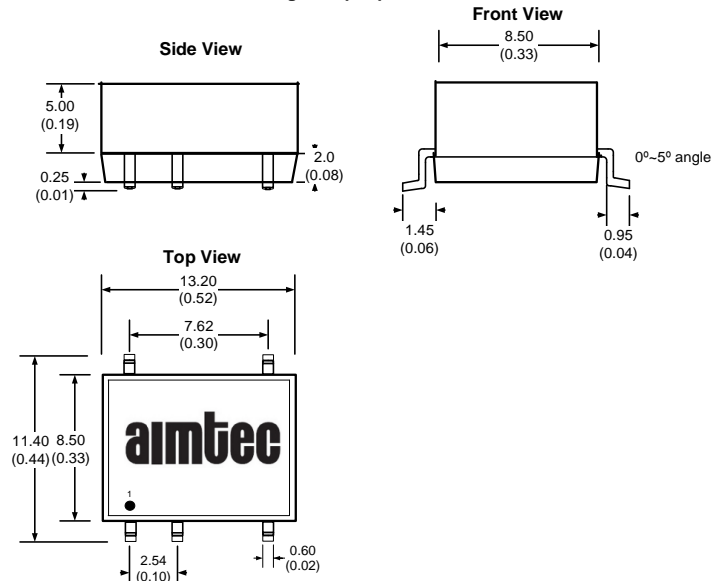


Pin	Single
1	- V Input
2	+ V Input
3	No Pin
4	-V Output
5	+V Output
6	No Pin
7	No Pin
8	N.C.

Pin	Dual Output Models
1	-V Input
2	+V Input
3	No Pin
4	Common
5	-V Output
6	No Pin
7	+V Output
8	No Pin
9	No Pin
10	N.C.


Dual Output Models

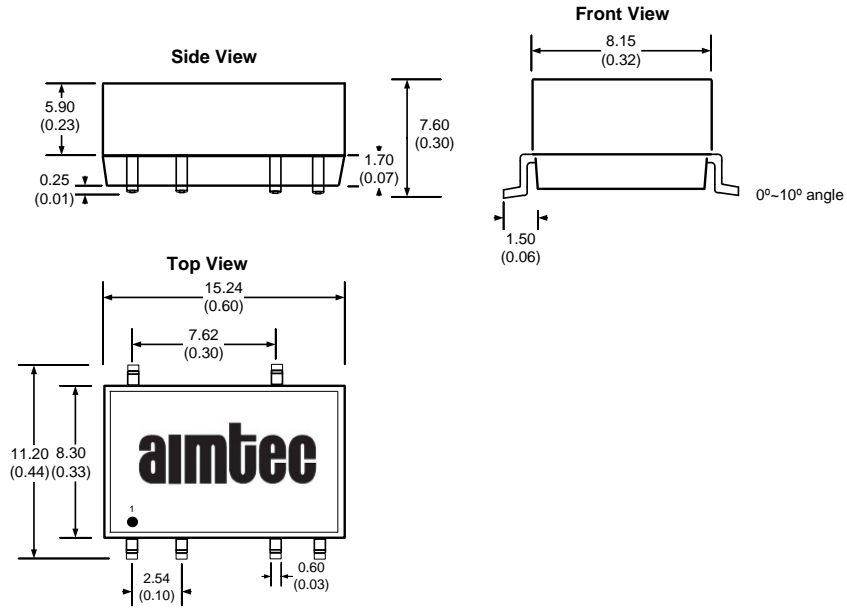


Dual Output Models with \*\*

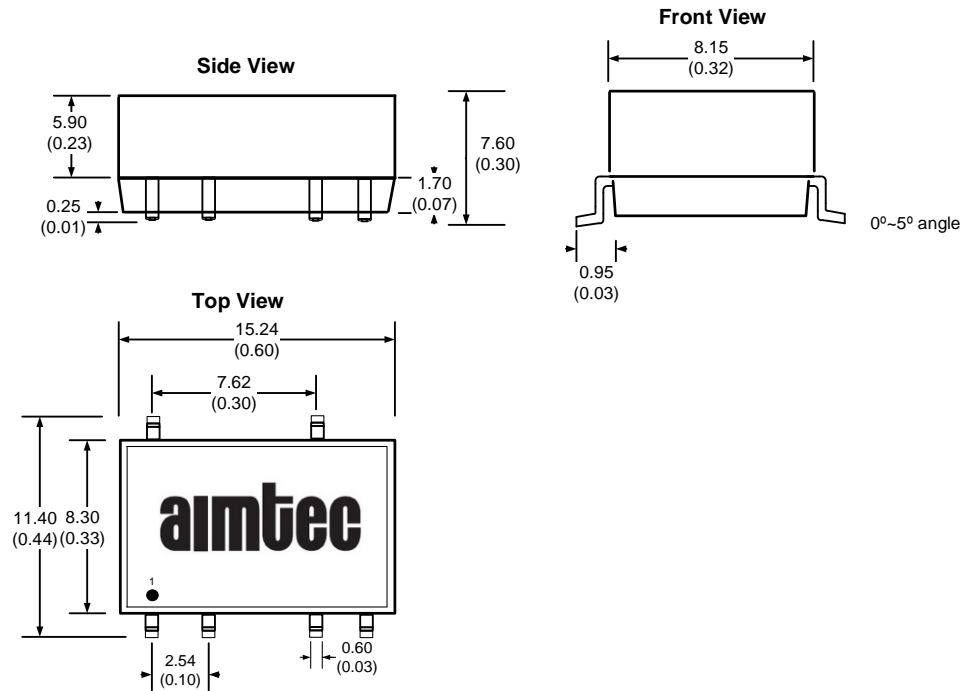

### Load Accuracy Tolerance Graph

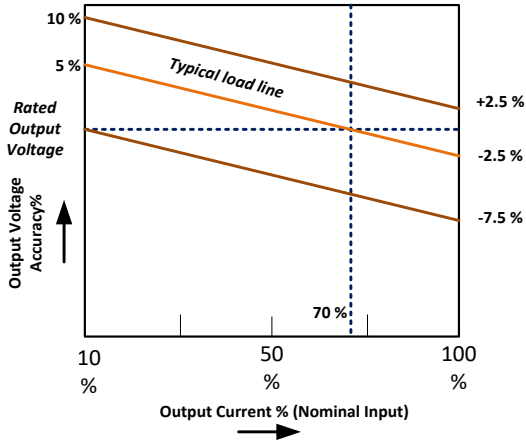



### Derating

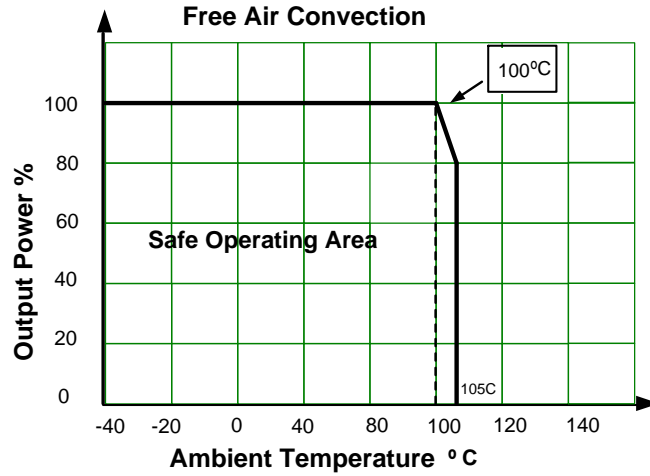

### Recommended Circuits



#### Capacitor selection Table

Vin	C1	Single VDC	C2	Dual VDC	C2/C3
3.3	4.7 $\mu$ F	3.3 V	10 $\mu$ F	$\pm$ 3.3	4.7 $\mu$ F
5	4.7 $\mu$ F	5V	10 $\mu$ F	$\pm$ 5V	4.7 $\mu$ F
	4.7 $\mu$ F	9 V	4.7 $\mu$ F	$\pm$ 9V	2.2 $\mu$ F
	4.7 $\mu$ F	12	2.2	$\pm$ 12 V	1
	4.7 $\mu$ F	15	1	$\pm$ 15 V	1
12	2.2 $\mu$ F	12 V	2.2 $\mu$ F	$\pm$ 12 V	1 $\mu$ F
15	2.2 $\mu$ F	15 V	1 $\mu$ F	$\pm$ 15 V	0.47 $\mu$ F
24	1 $\mu$ F	24V	0.47 $\mu$ F	$\pm$ 24 V	0.47 $\mu$ F

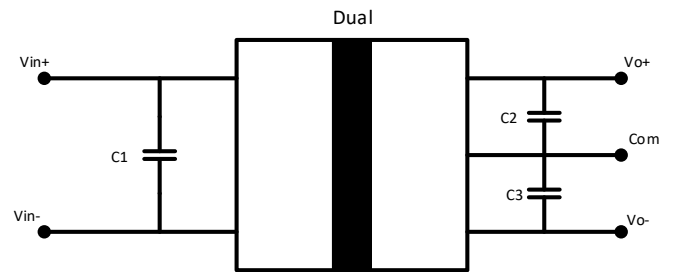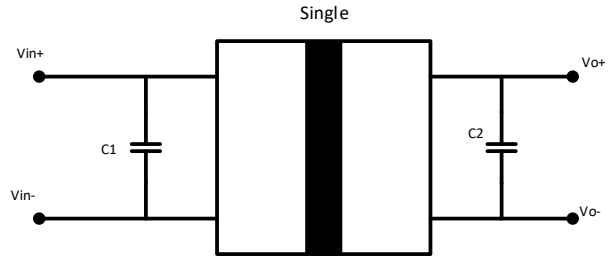


- 1) Ensure output load of Min 10%, or specifications may not be met
- 2) Under normal operation, there is no protection for overload condition
- 3) Converter may exhibit start up delay if capacitive load exceeds recommended
- 4) Ceramic or electrolytic type capacitors are recommended, tantalum type may damage converter
- 5) Parallel connections, or hot swapping is not recommended



**EMI Recommended Circuit (Class B) Input Reflected Ripple Current Test Circuit (for part numbers with suffix NZ)**

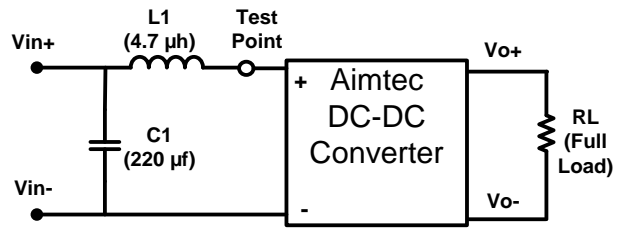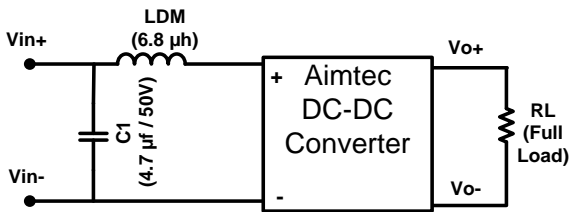

\* Tested at full load, and nominal input

**Typical Efficiency vs. Loading**

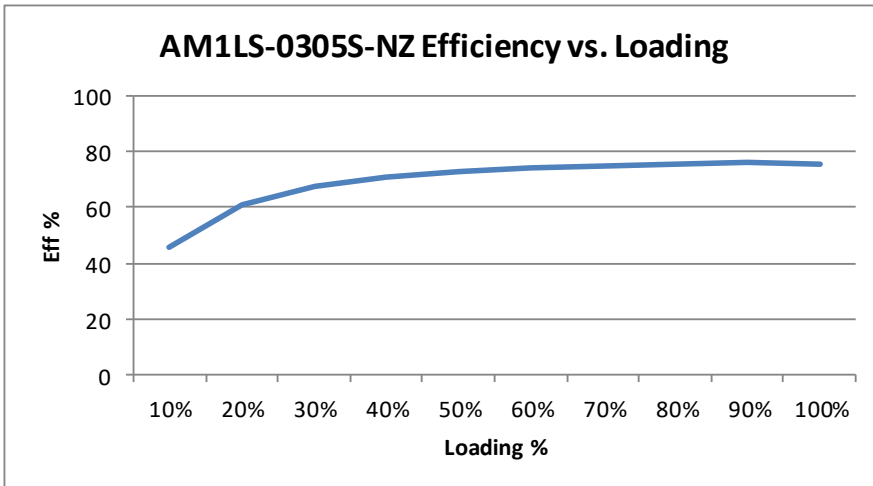

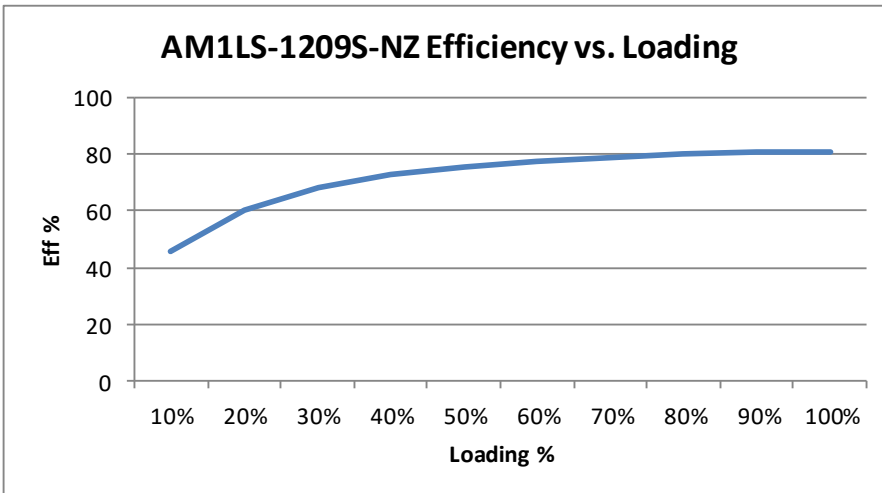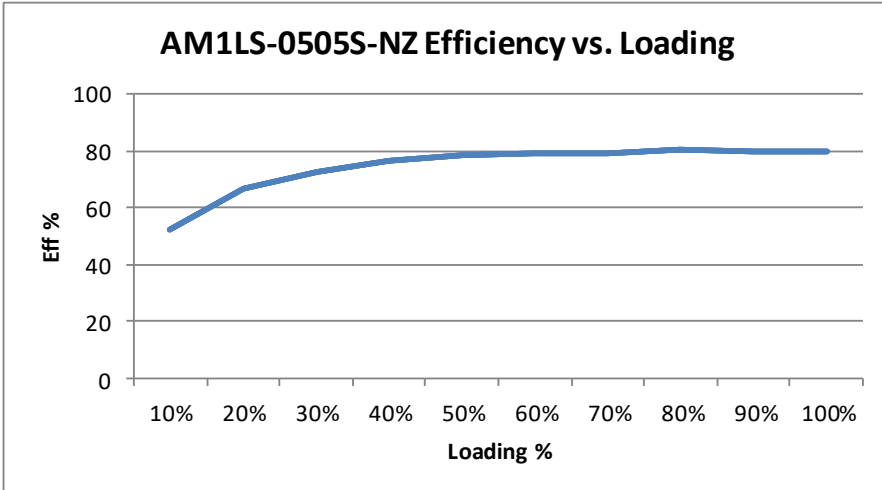

**NOTE:** **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [aimtec](#) manufacturer:*

Other Similar products are found below :

[AM10CW-4812S-FZ](#) [AM10E-2415DZ](#) [AM10W-60009S-NZ](#) [AM15C-2412SZ](#) [AM1D-121212DZ](#) [AM1DE-2405SZ](#) [AM1DS-0515SZ](#)  
[AM1G-1215SH30Z](#) [AM1G-2424SZ](#) [AM1L-1215SH30-NZ](#) [AM1P-0512DZ](#) [AM1S-2412SZ](#) [AM2D-1212SH30Z](#) [AM2GH-4815DZ](#) [AM30K-4805S-NZ](#) [AM3F-1205SH30Z](#) [AM3T-0515D-NZ](#) [AM3TIW-2412SH30-RZ](#) [AM40W-80024S-NZ](#) [AM6CW-2415S-NZ](#) [AM8TW-4803SZ](#)  
[AME15-15SMAZ](#) [AME1-5SBAZ](#) [AME2-12SBAZ](#) [AME2-24SAZ](#) [AME25-12SCJZ](#) [AME2-5SAZ](#) [AME30-12SMAZ](#) [AME3-12SBAZ](#)  
[AME3-5SAZ](#) [AME40-15SMAZ](#) [AMEL20-1215DMAZ](#) [AMEOC40-3.3SMAZ](#) [AMEOS30-15DMAZ](#) [AMEPR15D-3650AZ-UD](#) [AM10E-1205SZ](#) [AM15E-1203SH30IZ](#) [AM15T-4803SZ](#) [AM1D-1212DZ](#) [AM1D-240505DZ](#) [AM1DR-0505S-RZ](#) [AM1L-2415S-FZ](#) [AM2G-2424DZ](#)  
[AM30K-1212SIZ](#) [AM30K-2415SZ](#) [AM3G-1203SH30Z](#) [AM3N-2415D-RZ](#) [AM3T-0507S-VZ](#) [AM3TW-2405S-RZ](#) [AM40W-80015S-NZ](#)