
#### Thermoelectric Cooler RC12-2.5


## RoHS 2002/95/EC Compliant


### **Performance Values**

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N <sub>2</sub> ):	66	74
Qmax (watts):	23	26
Imax (amps):	2.5	2.5
Vmax (vdc):	14.7	16.4
AC Resistance (ohms):	4.9	



#### **Mechanical Characteristics**

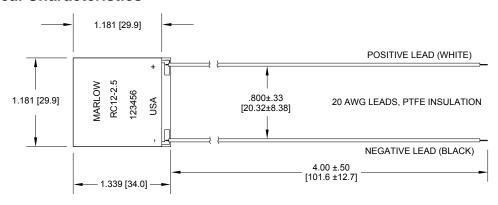

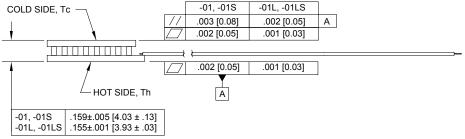

Ceramic Material: Alumina (AC)

Dimensions in [ ] are millimeters

# **Ordering Options**

Model Number	Description
RC12-2.5-01	Base Model w/ leads
RC12-2.5-01L	Lapped Model
RC12-2.5-01S	Sealed Model
RC12-2.5-01LS	Lapped and Sealed Model

#### **Features**


- RoHS 2002/95/EC compliant
- Solid-state reliability.
- Built with high temperature solder with the ability to withstand higher assembly processing temperatures for short periods of time (<160°C).</li>
- Superior nickel diffusion barriers on elements
- High strength for rugged environment.
- Porched configuration for enhanced leadwire strength
- RTV sealing available (Optional)
- Lapped option available for multiple module applications.




#### **Performance Curves**

#### **Environment: One atmosphere dry nitrogen**

Hot Side Temperature: 27°C

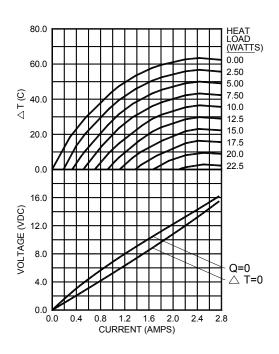

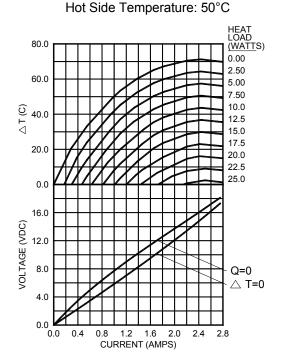

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

#### Installation

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

#### **Operation Cautions**

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

#### **Addresses**

Marlow Industries, Inc. 10451 Vista Park Road Dallas Texas 75238-1645 214-340-4900 (tel) 214-341-5212 (fax) www.marlow.com Marlow Industries Europe
Aberdeen House, South Road
Haywards Heath
West Sussex RH164NG UK
+44 (0)1444-443404 (tel)
+44 (0)1444-443334(fax)

Marlow Industries Japan 1-1-8-401 Uehara, Shibuya-ku Tokyo, Japan 151-0064 +81 (3) 5454-5280 (tel) +81 (3) 5454-5281(fax)

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for marlow manufacturer:

Other Similar products are found below:

Marlow