

C.A 1227

Logger Thermo-Anemometer

12 m/s

27 mph

30 m³/h


Measure air speed and flow rate in all situations

Double backlit display

MAP mode

Min, Max, Average and Hold functions

Spot or continuous recording up to
1 million points

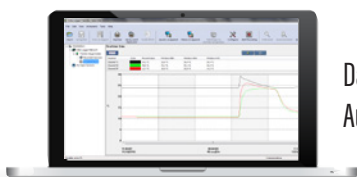

Data Logger Transfer
Automatic report generation



Measure up



12 m/s

C.A 1227 Logger Thermo-Anemometer

AIR SPEED AND FLOW RATE

Type of sensor	Vane / optical detection	
	Speed	Flow rate
Measurement range	0.25 m/s to 35.0 m/s (49.0 to 6890.0 fpm)	0.00 to 2,999 m ³ /h
Resolution	0.01 m/s (0.25 to 2.99 m/s) / 0.1 fpm (49.0 to 99.9 fpm) 0.1 m/s (3.0 to 35.0 m/s) / 1 fpm (100 to 6,850 fpm)	0.01 m ³ /h (0.00 to 2.99 m ³ /h) 0.1 m ³ /h (3.0 to 99.9 m ³ /h) 1 m ³ /h (100 to 2,999 m ³ /h)
Intrinsic uncertainty	± 3 % of reading ± 4 counts	± 8% of reading

TEMPERATURE

Type of sensor	CTN
Measurement range	- 20.0 to + 50.0 °C/ - 4 to + 122 °F
Resolution	Display in °C: 0.1°C Display in °F: 0.1°F
Intrinsic uncertainty in °C	0 to 50 °C: ± 0.8 °C / -20 to 0 °C: ± 1.6 °C

FUNCTIONS

Recording	Manual Start / Stop on the product: short press for MEM spot recording / Long press for REC recording at the rate of the current mode Programmed recording: start date, recording interval (1 minute to 2 hours) and end date defined using the PC software
Data storage	More than 1 million points
Min-Avg-Max-Hold	Yes
MAP mode	The MAP function can be used to map the air speeds measured
Flow-rate measurement	Yes: direct reading with the cones proposed as accessories or on the basis of a surface defined by the user.
Backlighting	Yes
Units	Air-speed units: m/s, km/h, fpm, mph - Air flow-rate units: m ³ /s, m ³ /h, l/s, cfm
Automatic power-off	Yes (configurable)

POWER SUPPLY

Type	3 x 1.5V AA / LR6 alkaline batteries Mains connection possible with the mains / micro-USB adapter offered as an accessory
Battery life	200 hrs (portable mode) / 8 days of recording (15-minute intervals)

PHYSICAL SPECIFICATIONS

Interfaces	2 possible communication modes: Bluetooth wireless link and USB
Mounting	Casing equipped with a magnet, a wall-mount system and a slot for suspending the product Compatible with the Multifix accessory
Dimensions / weight	187 x 72 x 32 mm / 260 g with batteries
Ingress protection	IP54 casing
Product operating range	Temperature: -10 to +60 °C / Humidity: 10 to 90 %RH
Compliance	IEC61010-1 / IEC 61326-1

GENERAL SPECIFICATIONS

Data Logger Transfer Windows PC software functions	Display as a graph or a table of values / Data export in graph or Excel table form Real-time mode / Automatic report generation in Word format / Data format compatible with the Dataview software offered as an accessory
Warranty	2 years

Accessories / Replacement Parts

Cones kit for flow-rate measurement with meter (circular cross-section Ø 210mm and rectangular cross-section 346x346mm)	P01654250
Vane sensor Ø80mm	P01654251
Shockproof sheath + Multifix	P01654252
Multifix	P01102100Z
Mains adapter	P01651023
Bag	P01298075
Metal case	P01298071
Dataview software	P01102095
Bluetooth BLE / USB modem for PC	P01654253
4 x AA/LR6 NiMH Batteries + Battery charger	HX0053



Standard state at delivery:

Bag, 3x 1.5 V AA alkaline batteries, USB cable, test report and quick start-up guide (complete manual and Data Logger Transfer software available from the Chauvin Arnoux website)

TO ORDER

C.A 1227 Logger thermo-anemometer
..... P01654227

FRANCE
Chauvin Arnoux
190, rue Championnet
75876 PARIS Cedex 18
Tél : +33 1 44 85 44 85
Fax : +33 1 46 27 73 89
info@chauvin-arnoux.fr
www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux LTD
Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
Dewsbury, West Yorkshire - WF12 7TH
Tel: +44 1924 460 494
Fax: +44 1924 455 328
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.com

MIDDLE EAST
Chauvin Arnoux Middle East
P.O. BOX 60-154
1241 2020 JAL EL DIB - LEBANON
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

CHAUVIN
ARNOUX
GROUP

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [Chauvin Arnoux](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [S-11](#) [FLUKE-LDG](#) [382153](#) [FM100](#) [RH210](#) [382253](#) [MO290-P](#)
[GEO-CABLE-REEL-50M](#) [T197914](#) [RD300-L](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [IR31CE](#) [IR32BC](#) [IR33BC](#) [MP7217TC](#) [NGM-1](#) [SGX-](#)
[7NH3](#) [UT381](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-NmHc-100](#) [3.000.401](#) [AX-7535](#) [CS-9S6SS-A](#) [P 2800 A](#) [P 2801](#) [P 2802](#) [P 5039](#) [P 5130](#) [P](#)
[5055](#) [P 5060](#) [P 5065](#) [P 5086](#) [P 5090](#) [P 5110](#) [P 5115](#) [P 5135](#) [P 5140](#) [P 5145](#) [P 5150](#) [P 5160](#)