



FROM : GOOD WAY



送檢
Reference Unit

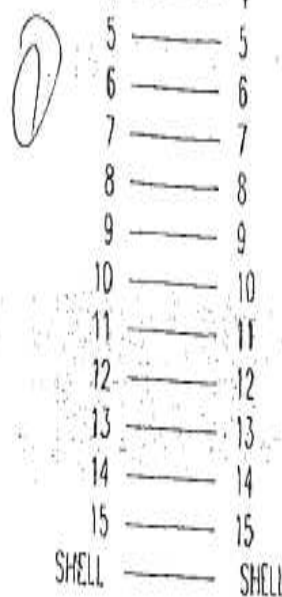

SPECIFICATION:

1. SHELL: STEEL, ZINC PLATED OR TIN PLATED
2. PIN CONTACT: GOLD PLATED OVER NICKEL
3. INSULATOR: PBT GLASS FIBRE REINFORCED
UL 94 V0
4. CURRENT RATING: 5 AMP
5. DIELECTRIC STRENGTH: 1000V FOR ONE MINUTE
6. INSULATOR RESISTANCE: 1000M MIN AT 500V DC
7. TEMPERATURE: -55°C -- +105°C
8. PACKAGE: W/CLEAR POLYBAG

1-0		OCT-18-2003	
REV	DESCRIPTION	DATE	ECN NO.
DRC NAME: SUPER THIN GC			
G. W. NO:	AG023AEX-00	CUS. ID:	10001
CUS. NO:	920.41132.3	DRC. NO:	1001-146
SHEET:	1/1	TOLERANCE:	UNIT: mm
		.X	
		XX ±0.40	DRAW. BY:
		SCALE: 1:1	CHECKED:

886 2 89191865

04/02 '02 14:08 NO.512 12

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [videk manufacturer](#):

Other Similar products are found below :

[2129HQ-1](#) [1996-10B](#) [1054](#) [2961-30BK](#) [2993-10BK](#) [2961-15G](#) [2965-0.5RG](#) [2965-0.75Y](#) [2965-10Y](#) [2965-30IM](#) [4093-2](#) [1961-1](#) [3115-1](#)
[1963-3](#) [1962-10R](#) [2259](#) [2965-30G](#) [2965-3BK](#) [2996-2Y](#) [2996AS-10GY](#) [2996AS-3G](#) [8920-7.6](#) [2965-1.5B](#) [2996AS-0.5Y](#) [8103](#) [2419-2](#) [2965-1.5RG](#) [2965-2PR](#) [2965-30](#) [2965-30BK](#) [2409M-2](#) [2993-3RG](#) [1962-5](#) [1962-3](#) [2996AS-3](#) [2560A-2](#) [8104](#) [2561-1](#) [9301-5](#) [2965-0.75BK](#) [2965-30B](#) [2965-3RG](#) [2218D-2](#) [2129GHQ-3](#) [2965-15B](#) [2965-15Y](#) [3089-2](#) [2118D](#) [1961-50R](#) [1961-50B](#)