
PTFE Insulated Equipment Wire to BS 3G 210

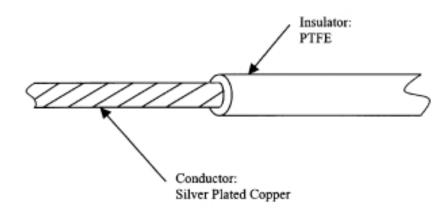

Unscreened Type A

The sizes available are as follows:

Size	No. of Strands	Nominal diameter of	Nom. diameter of conductor	Nom. Insulation R.T.	Overall diameter mm		Max Resistance	Max Wt.
		strands mm	mm	mm	Min.	Max	at 20°C /km	Kg/km
30	1	0.250	0.250	0.15	0.45	0.60	377.0	0.96
28	1	0.320	0.320	0.15	0.52	0.67	229.0	1.32
26	1	0.400	0.400	0.15	0.60	0.75	146.0	1.83
32	7	0.080	0.240	0.15	0.44	0.59	558.0	0.84
30	7	0.100	0.300	0.15	0.50	0.65	353.0	1.10
28	7	0.120	0.360	0.15	0.56	0.71	244.0	1.40
26	7	0.150	0.450	0.15	0.65	0.80	159.0	1.96
24	7	0.200	0.600	0.15	0.80	0.95	88.30	3.04
26	19	0.100	0.500	0.15	0.70	0.85	130.0	2.26
24	19	0.120	0.600	0.15	0.80	0.95	89.8	2.99
22	19	0.150	0.750	0.15	0.95	1.10	58.6	4.41
20	19	0.200	1.000	0.15	1.20	1.35	32.5	7.19

Cable Characteristics

Temperature rating : 190°C

Voltage rating : 300 Volts.

	This drawing is the exclusive property of Brand-Rex Limited an whatsoever without the express consent in writing of Brand-Rex purpose for which it is supplied and must be returned on demans breated as strictly confidential and must not be disclosed to any to of Brand-Rex Limited. An Agency Company of BICC plc.	Brand-Rex Leigh, Lancashire WN7 4HB, England Telephone (01942) 260387 Fax (01942) 607593				
1	art No : 31E101***		Design Ref: HPCS 9001			
	Drawing No : Leigh-0046	Issue No: 1	Date: 11/02/00	Issued By : H PARRY		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for brand rex manufacturer:

Other Similar products are found below :

SPC00453A001 100M
SPC00447A015 100M
SPC00442A003 100M
SPC00442A002 25M
SPC00449A002 25M
SPC00442A012 25M

SPC00449A009 100M
SPC00444A007 100M
SPC00471A001 100M
SPC00492A005 100M
SPC00454A001 100M
SPC00447A001 100M

SPC00445A001 100M
SPC00453A002 BLK
SPC00441A006 25M
SPC00440A004 25M
SPC00449A007 25M
SPC00449A007 100M

SPC00445A002 25M
SPC00449A012 100M
SPC00448A002 25M
SPC00444A006 100M
SPC00453A004 100M

SPC00448A002 100M
SPC00453A006 25M
SPC00448A001 25M
SPC00445A001 25M
SPC00448A001 25M

SPC00445A002 100M
SPC00453A006 25M
SPC00448A002 100M
SPC00445A001 25M
SPC00444A002 100M
SPC00448A015 25M

SPC00445A002 100M
SPC00445A002 100M
SPC00445A002 100M
SPC00444A015 25M
SPC00444A002 100M
SPC00444A015 25M

SPC00445A003 25M
SPC00443A002 100M
SPC00443A002 25M
SPC00443A002 25M
SPC00443A004 25M
SPC00443A002 25M
SPC00443A004 25M
SPC00443A002 25M
SPC00443A004 25M
SPC00443A004 25M
SPC00443A004 25M
SPC00443A004 25M
SPC00443A004 25M
SPC00443A002 25M
SPC00443A004 25M
<