


**Part Number:** AT-1620-TWT-12V-R



**Features**

Mounting: Thru Hole  
Tone: Continuous  
Frequency: 2048 +/- 500 Hz  
Lead Free Component


**Electrical Specifications**

Operating Voltage	9 +/- 15 Vp-p
Rated Current (Max.)	40 mA
Rated Voltage	12 Vp-p
Resonant Frequency	2048 +/- 500 Hz
Sound Pressure Level @ 10 cm (Min.)	85 dBA

Case: Noryl  
Weight: 5 g  
Pin Material: SnBi plated copper  
Environmentally friendly, lead free


**Mechanical**

*Dimensions are in millimeters, tolerance is ± 0.5 unless otherwise specified.*

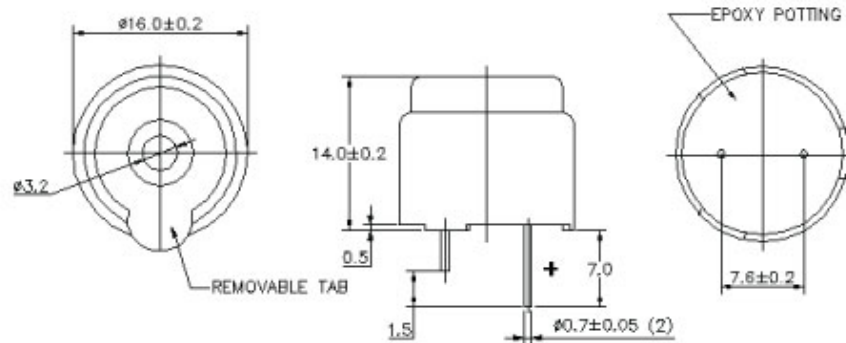

**Performance**

*Typical SPL vs. Frequency*

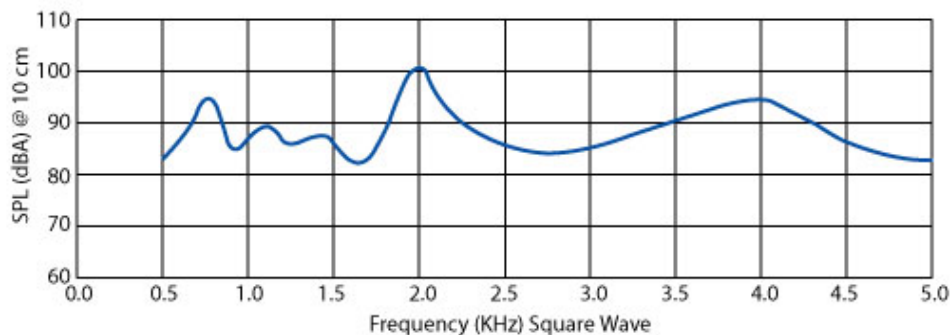

**For application notes and detail drawing specifications, please consult [www.projectsunlimited.com](http://www.projectsunlimited.com).**

Specifications subject to change without notice.

© 2005, Projects Unlimited Inc., All Rights Reserved.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Projects Unlimited](#) manufacturer:*

Other Similar products are found below :

[AW-15SBW](#) [AOM-4546L-R](#) [AI-383](#) [AT-1438-TWT-R](#) [AI-4328-P-FP250-R](#) [AI-4329-P-FP28-R](#) [X-4032-TF-LW105-R](#) [X-4035-TFL-LW140-R](#) [POM-5242P-R](#) [AOM-4540L-R](#) [X-2629-TWT-R](#) [AT-2440-TWT-R](#) [AT-1620-TWT-12V-R](#) [SMI-1324-TW-5V-2-R](#) [AST-03032MR-R](#) [POM-1644P-NF-R](#) [AI-550](#) [AOM-6738P-R](#) [AS01308MR-LW10](#) [AST-030C0MR-R](#) [AI-4328-P-C28-2-R](#) [TOM-1545P-R](#) [POM-3044P-R](#) [SMT-0727-S-R](#) [AOM-6738L-R](#) [AT-1220-TWT-5V-R](#) [AOM-4540P-R](#) [ROM-2238P-NF-R](#) [AI-1440-TWT-12V-R](#) [AT-1620-TWT-R](#)