

Construction Glass cartridge, silvered caps.
Specification DIN 41571, Sheet 2.
Marking Manufacturers Mark, Rated voltage, Rated current, Characteristic symbol category C.
Range 800 mA to 1.25 A
Voltage Rating 250 V ac 250 V dc.
Breaking Capacity 20 A dc at 250 V, DIN CATEGORY C.
 80A ac at 250 V.
Endurance 1 h at 1.5 I_n
Service Temperature 0°C to + 35°C.

Performance Data

Current	Total operating time	
	min	max
1.5 I _n	60 mins	—
2.1 I _n	—	2 mins
4 I _n	60 ms	2 s
10 I _n	20 ms	70 ms


Approximate Weight 0.8 kg per 1000 fuselinks.

Preferred Ratings

I_n
 800 mA
 1 A
 1.25 A

Other ratings may be available.

Performance Envelope — Combined Ratings

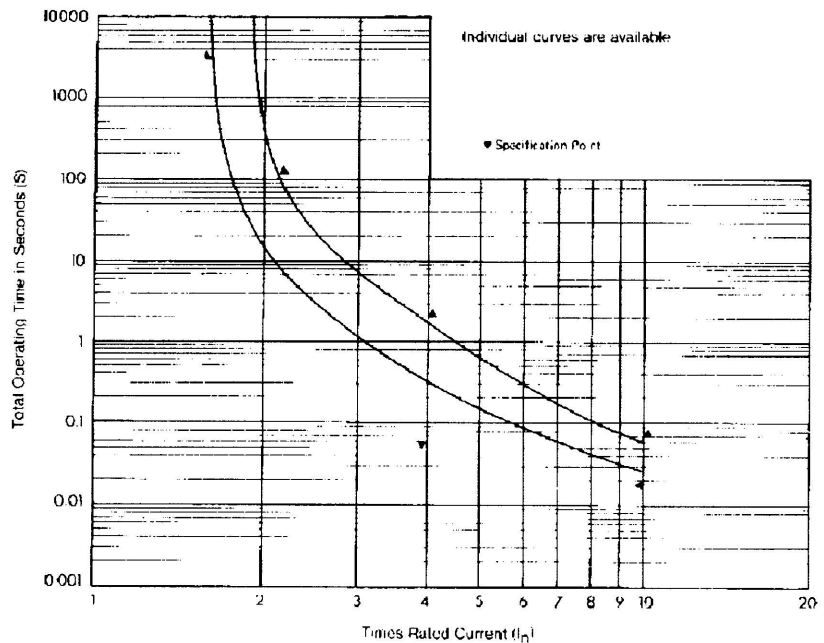

All rights reserved and every detail and advice rendered in this brochure is hereby subject to the Company's Standard Conditions of Sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Eaton](#) manufacturer:

Other Similar products are found below :

[BK1-S506-2-R](#) [FHN31G1](#) [CH222B](#) [SAMI-2I](#) [SAMI-6I](#) [LPN-RK-25SP](#) [ZE6](#) [ZE9](#) [LPN-RK-15SP](#) [LPN-RK-3SP](#) [SAMI-1I](#) [2499](#) [GMC-500MA](#) [AT-20](#) [BK/SC-45](#) [AGC-1-2](#) [BK/MDA-15](#) [BK/MDA-1](#) [BK/C519-1A](#) [BK/MDL-3-2/10](#) [89096-015](#) [8943K28](#) [8946K153](#) [8961K155](#) [M22-DH-Y](#) [M22-DLH-Y](#) [M22-D-R-GB0/K11](#) [M22-LCH-R](#) [M22-L-R/R](#) [M22-WLK3-B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [714125](#) [MBO-2](#) [7314K36](#) [7321K2](#) [ETF-200MA](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-3/4A](#) [F03A250V10A](#) [F03A250V12A](#) [MDA-2-8/10-R](#) [MDA-30A](#)