
Capacitive proximity sensors

CFAK 12P1103

dimension drawing

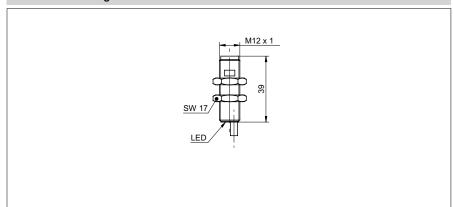

|--|

general data	
nominal sensing distance Sn	0,5 mm
mounting type	non-flush
GND electrode	no
temperature drift	± 20 %
sensitivity adjustment	no
output indicator	LED yellow
measurement type	contact with medium

BN (1) 0+Vs PNP BK (4) 0 output BU (3) 0 V

electrical data	
voltage supply range +Vs	10 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP make function (NO)
output current	< 200 mA
voltage drop Vd	< 2,5 VDC
switching frequency	< 15 Hz
short circuit protection	yes
reverse polarity protection	yes



photo





mechanical datatypecylindrical threadedhousing materialPBTdimension12 mmhousing length39 mmconnection typescable, 2 m

• Other housing materials are available on request

ambient conditions		
operating temperature	0 +70 °C	
protection class	IP 67	

field of application	
detection of non-conductive media	no
fill level detection through container	no
liquids in direct contact	yes
object detection / bulk goods	no

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Capacitive Touch Sensors category:

Click to view products by Baumer manufacturer:

Other Similar products are found below:

CP8186AT LC717A10AJ-AH CP7709DT AT42QT1012-MAH FK 8-1 SMBTASK3KIT6 LC717A10AR-NH MCP2036T-I/MG CP3155T QT113BISG CAP1166-1-CZC-TR CM12-08EBP-KW1 CR12CN04DPO-E2 CR30SCF10ATO CR30SCF10DPO BCS M30BBI2-PSC15D-S04K CA30CAF16PAM1 VC12RN230 XT130B1FBL2 FDC1004DGSR FDC1004DGST CR18SCF05DPO CR30CN15DPO-E2 VC12RT23010M CDWM3020ZPM 17-8421-226 VC12RN924 AT42QT1050-MMH AT42QT1050-MMHR AT42QT1110-AU AT42QT1244-AU AT42QT1244-AU AT42QT1481-AUR OTBA5L OTBVR81LQD PBCL22T SM31RDLBQD AT42QT1111-MU AT42QT1244-MU AT42QT2100-MUR AT42QT2120-MMHR VTBN6LQ MTCH6102-IMV CAP1128-1-BP-TR CA30CAF16PA STMPE16M31QTR STMPE16M31PXQTR STM8T143-EVAL XT230A1PAL2 LC717A00AR-NH