

## MPSA05/MMBTA05

## **NPN General Purpose Amplifier**

- This device is designed for general purpose amplifier applications at collector currents to 300mA.
- Sourced from process 10.





1. Emitter 2. Base 3. Collector 1. Base 2. Emitter 3. Collector

### Absolute Maximum Ratings T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Value	Units
$V_{CEO}$	Collector-Emitter Voltage	60	V
V <sub>CBO</sub>	Collector-Base Voltage	60	V
V <sub>EBO</sub>	Emitter-Base Voltage	4.0	V
I <sub>C</sub>	Collector current - Continuous	500	mA
T <sub>J</sub> , T <sub>stg</sub>	Junction and Storage Temperature	-55 ~ +150	°C

### Electrical Characteristics T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
Off Characte	Off Characteristics					
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage *	$I_{C} = 1 \text{mA}, I_{B} = 0$	60			V
V <sub>(BR)EBO</sub>	Emitter-Base Breakdown Voltage	$I_C = 100\mu A, I_C = 0$	4			V
I <sub>CEO</sub>	Collector Cutoff Current	$V_{CE} = 60V, I_{B} = 0$			0.1	μΑ
I <sub>CBO</sub>	Emitter Cutoff Current	$V_{CB} = 60V, I_{E} = 0$			0.1	μΑ
On Characteristics						
h <sub>FE</sub>	DC Current Gain	I <sub>C</sub> = 10mA, V <sub>CE</sub> = 1.0V I <sub>C</sub> = 100mA, V <sub>CE</sub> = 1.0V	100 100			
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 100mA, I <sub>B</sub> = 10mA			0.25	V
V <sub>BE(on)</sub>	Base-Emitter On Voltage	I <sub>C</sub> = 100mA, V <sub>CE</sub> = 1.0V			1.2	V
Small Signal Characteristics						
f <sub>T</sub>	Current Gain Bandwidth Product	I <sub>C</sub> = 10mA, V <sub>CE</sub> = 2V, f = 100MHz	100			MHz

<sup>\*</sup> Pulse Test: Pulse Width ≤ 300µs, Duty Cycle ≤ 2.0%


### Thermal Characteristics T<sub>A</sub>=25°C unless otherwise noted


Symbol	Parameter	Ma	Lheita	
		MPSA05	*MMBTA05	Units
P <sub>D</sub>	Total Device Dissipation Derate above 25°C	625 5	350 2.8	mW mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	83.3		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	200	357	°C/W


<sup>\*</sup> Device mounted on FR-4 PCB 1.6" × 0.06"

# **Package Dimensions**

TO-92

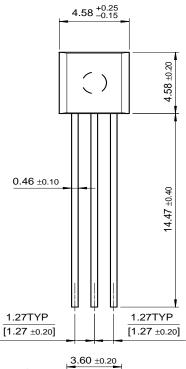


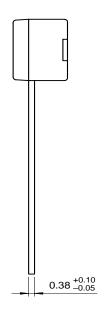





# Package Dimensions (Continued)

## **SOT-23**



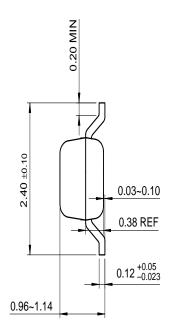



Dimensions in Millimeters

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

$ACEx^{TM}$	FACT™	ImpliedDisconnect™	PACMAN™	SPM <sup>TM</sup>
ActiveArray™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST <sup>®</sup>	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
CROSSVOLT™	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	$QS^{TM}$	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic™
E <sup>2</sup> CMOS™	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	I <sup>2</sup> C <sup>TM</sup>	$OCX^{TM}$	RapidConfigure™	UHC™
Across the board.	. Around the world.™	OCXPro™	RapidConnect™	UltraFET <sup>®</sup>
The Power Franchise™		OPTOLOGIC <sup>®</sup>	SILENT SWITCHER®	$VCX^{TM}$
Programmable Ad	ctive Droop™	OPTOPLANAR™	SMART START™	

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ON Semiconductor manufacturer:

Other Similar products are found below:

TDA1085CG NIF62514T1G BC182L 1.5KE16AG MC10H016PG BZX84C15 MC10H645FNG FAN5346S30X NB4N7132DTG

2SC4488T-AN KAF-3200-ABA-CD-B2 LA4425F-E MC100H680FNG MC10H123FNG KAI-11002-ABA-CD-B2 MC10H101PG

MC100E451FNG MC10H101FNG MC10EL15DG MC10ELT25DTG BZX84-C12 KAI-04070-ABA-JD-BA KAF-8300-AXC-CD-AA

TIP122 MC100ELT21DTG NOA1212CUTAG LA4725-E MMBFJ310 LM324SNG MC10H016FNR2G NOIP1SN1300A-QDI

MC33078DG MC34060ADG 5LN01M-TL-H MC33364D2G LP2951ACDG BAV70T LM358DG NC7ST32P5 FMS6501MSA28X

MBR2060CT BDX33C MC34074VDG NUP5150MUTBG NCV33064P-5RPG FST3126MX BAT54XV2 NC7ST00M5 P6SMB62AT3G LM555CMX