


PCB hole pattern

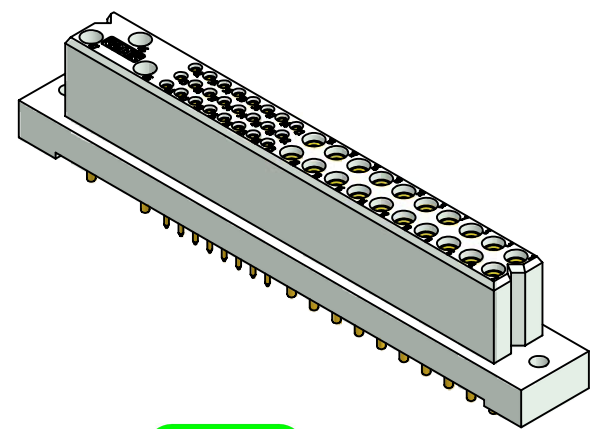

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

- MATERIALS AND FINISHES:
 - INSULATOR: GLASS FILLED PLASTIC UL 94 V-0 RATED, GREY RAL 7035 (b)
 - CONTACTS: COPPER ALLOY, PLATING: FLASH GOLD OVER NICKEL
- ELECTRICAL CHARACTERISTICS:
 - CREEPING AND CLEARANCE DISTANCE; MINIMUM:
 - CONTACT 47 TO CONTACT 46: 2.5 MM
 - CONTACT 47 TO CONTACT 45: 3.2 MM
 - CONTACT 46 TO CONTACT 45: 3.2 MM
 - CONTACT 47 TO SIGNAL CONTACTS: 6.4 MM
 - CONTACT 46 TO SIGNAL CONTACTS: 6.4 MM
 - CONTACT 45 TO SIGNAL CONTACTS: 2.0 MM
 - CONTACT CURRENT RATING:
 - POWER CONTACTS POS. 45-47: 40 AMPERES CONTINUOUS, ALL CONTACTS UNDER LOAD
 - POWER CONTACTS POS. 1-20: 28 AMPERES CONTINUOUS, ALL CONTACTS UNDER LOAD
 - SIGNAL CONTACTS: 3 AMPERES NOMINAL
 - INITIAL CONTACT RESISTANCE PER IEC 512-2, TEST 2b:
 - POWER CONTACTS: 0.0007 OHM MAX.
 - SIGNAL CONTACTS: 0.004 OHM MAX.
 - INSULATION RESISTANCE: 5 G OHM PER IEC 512-2, TEST 3a
 - VOLTAGE PROOF:
 - CONTACTS POS. 46, 46, 47: 3 kV r.m.s.
 - CONTACTS POS. 1-20: 1.5 kV r.m.s.
 - CONTACTS POS. 21-44: 1 kV r.m.s.
- WORKING TEMPERATURE: -55°C TO +125°C
- CONNECTOR IS PART MARKED: [PART-NO. CONEC ABC]

24	Signal contact (Pos. 21-44)	5		
20	Power contact type 3 (Pos. 1-20)	4		
1	Power contact type 2 (Pos. 45)	3		
2	Power contact type 1 (Pos. 46-47)	2		
1	Case 47pos. female	1		
quantity	part description	item	dwg no. / norm	material
partlist				
finish: see notes		tolerance ISO 2768-m	scale: 2:1	
		dim. in mm	material: see notes	
		date	name	title:
		drawn 18.01.05	Mankopf	SOCKET CONNECTOR 47pos.
		appd. 18.01.05	E. Mickenbecker	SOLDER PIN STRAIGHT
		norm		CompactPCI
		d-old		dwg no: [Inventor]
1x b	A 2168	21.02.05	Mkf.	45K1A005
rev.	description	date	name	part no: CPH47W23FGRASK9X
				DIN-A2
				sh: 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Unspecified Connectors](#) category:

Click to view products by [CONEC](#) manufacturer:

Other Similar products are found below :

[1-21107-1](#) [2-21053-5](#) [PSC-28-1](#) [38111](#) [403000A10M050](#) [1-1589688-1](#) [770690-4](#) [QUINT-PS/1AC/48DC/10](#) [99 9113 02 05](#) [CA06COM-PG14SE7S-SPL](#) [578302](#) [578286](#) [130623](#) [186316](#) [153253](#) [186328](#) [153322](#) [153354](#) [193951](#) [1713941](#) [HC-DD72-I-CT-F](#) [RC-5AS2000](#) [RC-5CS2000](#) [RC-Z2068](#) [VC-TR5/6M](#) [RAD-900-CONF-RF1](#) [RAD-CON-SMA-N-SS](#) [RAD-ISM-900-ANT-OMNI-0-6](#) [RAD-PIG-EF316-N-RSMA](#) [KST-POF](#) [RIF-0-RPT-12DC/21](#) [RIF-1-BPT/2X21](#) [RIF-1-RPT-LV-120AC/2X21AU](#) [PV-FT-C2F-HSG](#) [HC-EVO-B06-HHFS-2B-PL-BK](#) [99 0210 00 04](#) [801377](#) [803579](#) [710-00007](#) [125.038-8](#) [135.016](#) [136.1612](#) [137.014](#) [137.015](#) [137.016](#) [138.015](#) [138.016](#) [2000 1/8](#) [2902021](#)
[259.02SB-25](#)