2210-T/B Series Keyboards



Compact format, vandal resistant keyboards with integrated trackball

 Vandal resistant (20J BS EN 60068-2-75: 1997)

- Weather resistant (IP65)
- Integral PS2/USB Interface (switchable)
- Optional PC connection cables (sold separately)
- Optional fixing kit for under panel installation (sold separately) or adapter kit for benchtop use (also sold separately)

 RFI / EMI Protection in accordance with current European and U.S. directives

CREEFEE

A CEF

- Operational life of more than 4 million cycles per key
- Resistant to most commonly used cleaning agents
- Integral 38mm PS2 / USB compatible trackball with left & right click keys
- 63 keys
- Compact format: 360.0 mm x 118.5 mm x 38.5 mm




UK Email: sales@storm-interface.com Tel: +44 (0)1895 431421 USA Email: sales.usa@storm-keypads.com Tel: +1 (630) 469 2981

www.storm-interface.com

www

Ztorm 2210-T/B Series keyboards for public environments

STORM 2210-T/B keyboards are constructed to survive in exposed, unsupervised, public environments. Their responsive key action ensures rapid, reliable and responsive data entry in tough, wet or hostile conditions. A hardened stainless steel front plate and captive, cast metal or high impact polymer keys ensure the keyboard's resistance to hard use, abuse and vandalism. A water and impact resistant trackball makes this keyboard the complete and ideal solution for PC data entry in menu based 'point & click' application.

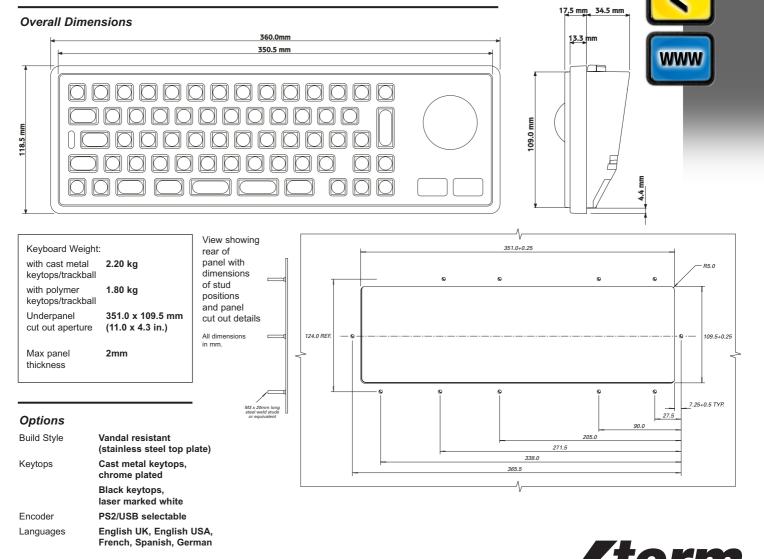

Electrical

EMC Emissions EN55022 : 1998 Class B Limit EMC Immunity to ESD EN55024:1998 EMC Immunity to Radiated Fields EN55024 : 1998 Electrical Safety EN60950, UL60950 **Industry Standard PS2** Communication or USB Interface Supply requirements +5V nominal (5.5V to 4.75V) - voltage Supply requirements 60mA (with 2 LEDs illuminated) — current

Accessories

Description 2200 Underpanel Fixing Kit - contains clips 2200 Foot Kit - required for benchtop use Keyboard PS2 Cable — straight 2.5m long Keyboard USB Cable - straight 2.5m long Trackball PS2 Cable — straight 2.5m long Trackball USB Cable — straight 2.5m long

Environmental

Sealing - Water / Particulates Trackball sealing Temperature

Mechanical


2200 -002003

2200 -003003

Impact Resistance Key Pitch Size Travel Actuation Force

EN60529 (sealing to IP65) IP65 stationary (IP54 rotating) -20°C to +60°C operating (dry)

20 Joules via 50mm dia steel striker 19mm 11mm square 1.5mm nominal 130g nominal



Email: sales.usa@storm-keypads.com UK Office Storm Interface 14 Bentinck Court Bentinck Road

West Drayton Middlesex UB7 7RQ

iterfacel

Tel: +44 (0)1895 431421 Fax: +44 (0)1895 431132 Email: sales@storm-interface.com

www.storm-interface.com

Storm is a trademark of Keymat Technology Ltd ace is a trading name of Keymat Technology Ltd

Storm Interface products include technology protected by international patents and design registration. All rights reserved.

Stock Code Whilst every effort is made to ensure details 2200-MK0001 are correct at time of print, specifications 2200-FK000X 1200 -001001 1200 -002001



2210-T/B-LIT-01 Rev 2 sianed +44 (0)7810 551046 Oct 2004

FM 39602

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Storm Interface manufacturer:

Other Similar products are found below :

EZ06-23001 3KLW041103 7207-0410203 7207-121W203 7207-041W201 GS000201 3KLW120101 EZB6-730003 EZB6-430003 7203-04CW203 PLX041203 DEPLXT203 2K120103 1605-330013 4200-103 DE1KT103 DE2KT103 8616-210023 WE2KT103 70160201 8616-310023 2210-452223 FT1K0803 1200-MK0003 1K041103 3K042103 DR2KT203 5001-200203 5100-1003 5103-1003 RC120201 70C00101 70B00101 70A00101 EZB2-505H03 EZB6-530023 EZB2-405003 6000-210023 7202-0400203 DEL6003 2K160103 EZ08-23001 FT4K1003 2K12T103 3K160103 5100-0003 5100-FK03 5103-0103 DXPS1K103 DXPS1W303