


W92 Combination DIN and Flange Mount Power Relay/DPST-NO and DPDT 30 Amp Rating (DC and AC)

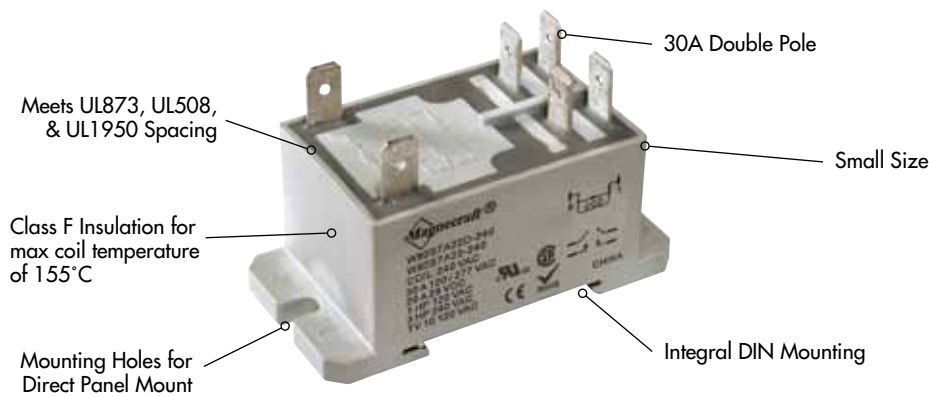


General Specifications

(UL 508)

Contact Characteristics		Units	Single Throw W92S7	Double Throw W92S11
Number and type of Contacts			DPST-NO	DPDT-NO
Contact materials			Silver Alloy	Silver Alloy
Thermal (Carrying) Current	A		30	30
Maximum Switching Voltage	V		300V	300V
Switching Current @ Voltage	~	Resistive	30A @ 277V 50/60Hz	30A @ 277V 50/60Hz
		Resistive	20A @ 28V	20A @ 28V
	⎓	HP	3 @ 240V 50/60Hz	3 @ 240V 50/60Hz
		HP	1 @ 120V 50/60Hz	1 @ 120V 50/60Hz
Minimum Switching Requirement	Minimum	Pilot Duty	720 VA	720 VA
		mA	500 @ 12 VAC/VDC	500mA @ 12 VAC/VDC
100mA @ 6 VAC/VDC				
Coil Characteristics				
Voltage Range	% of Nominal	~	V	12...240
		⎓	V	6...110
Operating Range	~	~	80% to 120%	80% to 120%
		⎓	75% to 120%	75% to 120%
Average consumption	~	~	VA	4
		⎓	W	1.7
Drop-out voltage threshold	~	~	10%	10%
		⎓	10%	10%
Performance Characteristics				
Electrical Life (UL 508)	Operations @	(Resistive)	100,000	100,000
	Rated Current			
Mechanical Life	Unpowered		5,000,000	5,000,000
Operating time (response time)		ms	15	15
Dielectric	Between coil	~	V	4000
	and contact	~	V	2000
	Between poles	~	V	1500
	Between contacts	~	V	1500
Environment				
Product certifications	Standard version		UL, CE, CSA	UL, CE, CSA
Ambient air temperature around the device	Storage	°C	-40...+85	-40...+85
	Operation	°C	-40...+55	-40...+55
Vibration resistance	Operational	g-n	3, 10-55Hz	3, 10-55Hz
Shock resistance		g-n	10	10
Weight		grams	86	86

Part Number Builder

W92	S	7	D	22D	-12
Series	Cover	Configuration	Current Type	Mounting	Voltage
W92	S = Sealed dust cover	7 = DPST-NO 11 = DPDT	A = AC D = DC	22D = DIN rail mount cover	Coil Voltage


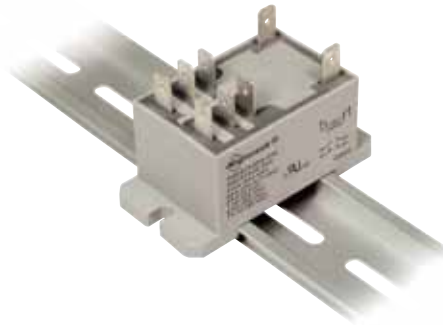


Standard Part Numbers



BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Nominal Input Voltage	Coil Resistance (OHMS)	DIN Part Number	Supersedes Part Number	Contact Configuration
24 VAC, 50/60 Hz	250 Ω	W92S7A22D-24	W92S7A22-24	DPST-NO
120 VAC, 50/60 Hz	1600 Ω	W92S7A22D-120	W92S7A22-120	DPST-NO
240 VAC, 50/60 Hz	6500 Ω	W92S7A22D-240	W92S7A22-240	DPST-NO
24 VAC, 50/60 Hz	250 Ω	W92S11A22D-24	W92S11A22-24	DPDT
120 VAC, 50/60 Hz	1600 Ω	W92S11A22D-120	W92S11A22-120	DPDT
240 VAC, 50/60 Hz	6500 Ω	W92S11A22D-240	W92S11A22-240	DPDT
12 VDC	86 Ω	W92S7D22D-12	W92S7D22-12	DPST-NO
24 VDC	350 Ω	W92S7D22D-24	W92S7D22-24	DPST-NO
110/125 VDC	7255 Ω	W92S7D22D-110	W92S7D22-110	DPST-NO
12 VDC	86 Ω	W92S11D22D-12	W92S11D22-12	DPDT
24 VDC	1600 Ω	W92S11D22D-24	W92S11D22-24	DPDT
110/125 VDC	6500 Ω	W92S11D22D-110	W92S11D22-110	DPDT

WIRING DIAGRAMS



ONLY NECESSARY TERMINALS ARE PRESENT ON SINGLE THROW STYLES

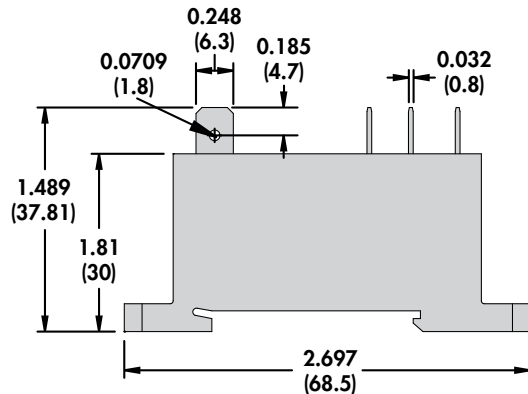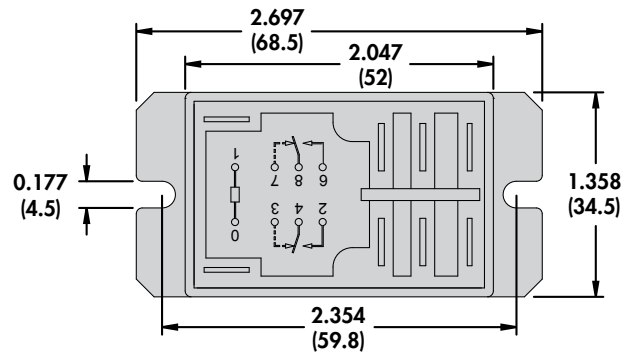

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCHNEIDER ELECTRIC](#) manufacturer:

Other Similar products are found below :

[TDR782XBXA-12D](#) [SSR230DIN-AC22](#) [725AXXSC3ML-120A](#) [16-1332](#) [16-782C1](#) [XB5DTB24](#) [XB5DTGM2](#) [XB5DTGM3](#) [XB5DTGM4](#)
[XB5DTGM5](#) [XPSBAE3920P](#) [ZBSP3](#) [NSYS3D6830T](#) [VCF0GE](#) [VZN14](#) [750XBXR4L-24A](#) [792XBXM4L-24D](#) [XB5DTB25](#) [W117SIP-3](#)
[976XBXH-120A](#) [781XAXRC-120A](#) [16-788C1](#) [LC1D50AKUE](#) [LC1K12004M7](#) [LP2K0601BD](#) [LP4K09008BW3](#) [LP5K0610BW3](#) [VBF02](#)
[VCF4GE](#) [VCFN40GE](#) [W172DIP-8](#) [6250AXXSZS-AC90](#) [788XBXRC1-12D](#) [781XAXRC-24D](#) [50-1289P](#) [LC1D40ABNE](#) [LC1D65ABNE](#)
[LC1D65AKUE](#) [LC1K0610V7](#) [LP2K0901BD](#) [LP2K0910BD](#) [LP5K0910BW3](#) [NSYS3D6640T](#) [VCF02](#) [VCF3GE](#) [VVE0](#) [199ADX-4](#)
[SSR220DIN-DC22](#) [389FXBXC-120A](#) [199DBX-16](#)