

## Metallized Polyester (PET) Capacitors PCM 7.5 mm to 37.5 mm

### Special Features

- High volume/capacitance ratio
- Self-healing
- According to RoHS 2002/95/EC

### Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Timing

### Construction


#### Dielectric:

Polyethylene-terephthalate (PET) film

#### Capacitor electrodes:

Vacuum-deposited

#### Internal construction:

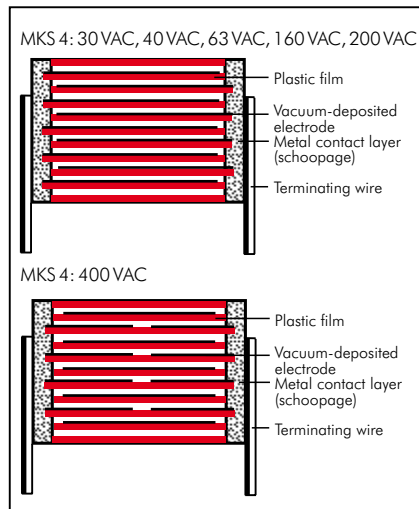

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.  
Epoxy resin seal: Red

### Electrical Data

#### Capacitance range:

1000 pF to 220 μF (E12-values on request)

#### Rated voltages:

50 VDC, 63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC, 1500 VDC, 2000 VDC

#### Capacitance tolerances:

±20%, ±10% ±5%

#### Operating temperature range:

-55° C to +100° C

#### Climatic test category:

55/100/56 in accordance with IEC

#### Insulation resistance at +20° C:

$U_r$	$U_{test}$	$C \leq 0.33 \mu F$	$0.33 \mu F < C \leq 220 \mu F$
50 VDC	10V	$\geq 5 \times 10^3 M\Omega$ (mean value: $3 \times 10^4 M\Omega$ )	$\geq 1500 \text{ sec } (M\Omega \times \mu F)$ (mean value: 4500 sec)
63 VDC	50V	$\geq 1 \times 10^4 M\Omega$ (mean value: $5 \times 10^4 M\Omega$ )	$\geq 3000 \text{ sec } (M\Omega \times \mu F)$ (mean value: 6000 sec)
100 VDC	100V	$\geq 1.5 \times 10^4 M\Omega$ (mean value: $5 \times 10^4 M\Omega$ )	$\geq 5000 \text{ sec } (M\Omega \times \mu F)$ (mean value: 15000 sec)
$\geq 250 \text{ VDC}$	100V	$\geq 3 \times 10^4 M\Omega$ (mean value: $1 \times 10^5 M\Omega$ )	$\geq 10000 \text{ sec } (M\Omega \times \mu F)$ (mean value: 40000 sec)

Measuring time: 1 min.

#### Dissipation factors at +20° C: $\tan \delta$

at f	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1.0 \mu F$	$C > 1.0 \mu F$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	-
100 kHz	$\leq 30 \times 10^{-3}$	-	-

#### Maximum pulse rise time:

Capacitance pF/μF	Pulse rise time V/μsec max. operation/test								
	50VDC	63VDC	100VDC	250VDC	400VDC	630VDC	1000VDC	1500VDC	2000VDC
1000 ... 6800	-	-	-	-	-	-	70/700	90/900	100/1000
0.01 ... 0.022	-	30/300	30/300	35/350	38/380	40/400	50/500	50/500	60/600
0.033 ... 0.068	-	15/150	15/150	20/200	25/250	32/320	26/260	35/350	40/400
0.1 ... 0.22	10/100	10/100	12/120	15/150	15/150	17/170	20/200	35/350	40/400
0.33 ... 0.68	9/90	9/90	9/90	10/100	10/100	13/130	20/200	20/200	38/380
1.0 ... 2.2	6/60	6/60	5/50	6/60	9/90	13/130	14/140	15/150	-
3.3 ... 6.8	2.5/25	3/30	3/30	6/60	6/60	9/90	12/120	-	-
10 ... 220	2.5/25	2.5/25	2.5/25	3/30	6/60	-	-	-	-

for pulses equal to the rated voltage

### Mechanical Tests

#### Pull test on leads:

$d \leq 0.8 \phi$ : 10 N in direction of leads  
 $d > 0.8 \phi$ : 20 N in direction of leads  
according to IEC 60068-2-21

#### Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

#### Low air density:

1kPa = 10 mbar in accordance with IEC 60068-2-13

**Bump test:** 4000 bumps at 390 m/sec<sup>2</sup> in accordance with IEC 60068-2-29

### Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

## Continuation

### General Data


Capacitance	50 VDC/30 VAC*					63 VDC/40 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 $\mu\text{F}$						2.5	7	10	<b>7.5</b>	MKS4C021002A00
0.015 "						4	9	13	10	MKS4C021003C00
0.022 "						2.5	7	10	<b>7.5</b>	MKS4C021502A00
0.033 "						4	9	13	10	MKS4C021503C00
0.047 "						2.5	7	10	<b>7.5</b>	MKS4C022202A00
0.068 "						4	9	13	10	MKS4C022203C00
						2.5	7	10	<b>7.5</b>	MKS4C023302A00
						4	9	13	10	MKS4C023303C00
						2.5	7	10	<b>7.5</b>	MKS4C024702A00
						4	9	13	10	MKS4C024703C00
						2.5	7	10	<b>7.5</b>	MKS4C026802A00
						4	9	13	10	MKS4C026803C00
0.1 $\mu\text{F}$	2.5	7	10	<b>7.5</b>	MKS4B031002A00	2.5	7	10	<b>7.5</b>	MKS4C031002A00
0.15 "	2.5	7	10	<b>7.5</b>	MKS4B031502A00	4	9	13	10	MKS4C031003C00
0.22 "	2.5	7	10	<b>7.5</b>	MKS4B032202A00	2.5	7	10	<b>7.5</b>	MKS4C031502A00
0.33 "	2.5	7	10	<b>7.5</b>	MKS4B033302A00	4	9	13	10	MKS4C031503C00
0.47 "	3	8.5	10	<b>7.5</b>	MKS4B034702B00	3	8.5	10	<b>7.5</b>	MKS4C032202B00
0.68 "	4	9	10	<b>7.5</b>	MKS4B036802C00	4	9	13	10	MKS4C032203C00
						4	9	10	<b>7.5</b>	MKS4C033302C00
						4	9	13	10	MKS4C033303C00
						4	9	10	<b>7.5</b>	MKS4C034702C00
						4	9	13	10	MKS4C034703C00
						5	10.5	10.3	<b>7.5</b>	MKS4C036802E00
						4	9	13	10	MKS4C036803C00
1.0 $\mu\text{F}$	4	9	10	<b>7.5</b>	MKS4B041002C00	5	10.5	10.3	<b>7.5</b>	MKS4C041002E00
1.5 "	5	10.5	10.3	<b>7.5</b>	MKS4B041502E00	4	9	13	10	MKS4C041003C00
2.2 "	5.7	12.5	10.3	<b>7.5</b>	MKS4B042202F00	5.7	12.5	10.3	<b>7.5</b>	MKS4C041502F00
3.3 "	5.7	12.5	10.3	<b>7.5</b>	MKS4B043302F00	5	11	13	10	MKS4C041503F00
4.7 "	7.2	12.5	10.3	<b>7.5</b>	MKS4B044702G00	5	11	13	10	MKS4C042203F00
6.8 "	6	12	13	10	MKS4B044703G00	6	12.5	18	15	MKS4C042204C00
	7.2	12.5	10.3	<b>7.5</b>	MKS4B046802G00	6	12	13	10	MKS4C043303G00
	6	12	13	10	MKS4B046803G00	7	14	18	15	MKS4C043304D00
						7	14	18	15	MKS4C044704D00
						6	15	26.5	22.5	MKS4C044705B00
						8	15	18	15	MKS4C046804F00
						7	16.5	26.5	22.5	MKS4C046805D00
10 $\mu\text{F}$	9	16	18	15	MKS4B051004J00	8.5	18.5	26.5	22.5	MKS4C051005F00
15 "	11	21	26.5	22.5	MKS4B051505I00	11	21	31.5	27.5	MKS4C051006B00
22 "	11	21	31.5	27.5	MKS4B052206B00	11	21	26.5	22.5	MKS4C051505I00
33 "	13	24	31.5	27.5	MKS4B053306D00	11	21	31.5	27.5	MKS4C051506B00
47 "	15	26	31.5	27.5	MKS4B054706F00	13	24	31.5	27.5	MKS4C052206D00
68 "	13	24	41.5	37.5	MKS4B054707C00	15	26	31.5	27.5	MKS4C053306F00
	20	39.5	31.5	27.5	MKS4B056806J00	17	29	31.5	27.5	MKS4C054706G00
	17	29	41.5	37.5	MKS4B056807E00	17	29	41.5	37.5	MKS4C054707E00
						20	39.5	31.5	27.5	MKS4C056806J00
						19	32	41.5	37.5	MKS4C056807F00
100 $\mu\text{F}$	19	32	41.5	37.5	MKS4B061007F00	20	39.5	41.5	37.5	MKS4C061007G00
150 "	20	39.5	41.5	37.5	MKS4B061507G00	24	45.5	41.5	37.5	MKS4C061507H00
220 "	24	45.5	41.5	37.5	MKS4B062207H00					

\* AC voltage:  $f = 50 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\*PCM = Printed circuit module  
= lead spacing

Dims. in mm.

$\varnothing d$	PCM	W
0.5	7.5	$\leq 3$
0.6	7.5	$\geq 4$
0.6	10	
0.8	15 - 27.5	
1.0	37.5	



Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Lead length:	6-2 = SD
Taped version see page 127.	

Rights reserved to amend design data without prior notification.

## Continuation

### General Data

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 $\mu\text{F}$	2.5	7	10	<b>7.5</b>	MKS4D021002A00_	3	8.5	10	<b>7.5</b>	MKS4F021002B00_
	4	9	13	10	MKS4D021003C00_	4	9	13	10	MKS4F021003C00_
0.015 "	2.5	7	10	<b>7.5</b>	MKS4D021502A00_	3	8.5	10	<b>7.5</b>	MKS4F021502B00_
	4	9	13	10	MKS4D021503C00_	4	9	13	10	MKS4F021503C00_
0.022 "	2.5	7	10	<b>7.5</b>	MKS4D022202A00_	3	8.5	10	<b>7.5</b>	MKS4F022202B00_
	4	9	13	10	MKS4D022203C00_	4	9	13	10	MKS4F022203C00_
0.033 "	2.5	7	10	<b>7.5</b>	MKS4D023302A00_	3	8.5	10	<b>7.5</b>	MKS4F023302B00_
	4	9	13	10	MKS4D023303C00_	4	9	13	10	MKS4F023303C00_
0.047 "	2.5	7	10	<b>7.5</b>	MKS4D024702A00_	3	8.5	10	<b>7.5</b>	MKS4F024702B00_
	4	9	13	10	MKS4D024703C00_	4	9	13	10	MKS4F024703C00_
0.068 "	2.5	7	10	<b>7.5</b>	MKS4D026802A00_	4	9	10	<b>7.5</b>	MKS4F026802C00_
	4	9	13	10	MKS4D026803C00_	4	9	13	10	MKS4F026803C00_
0.1 $\mu\text{F}$	2.5	7	10	<b>7.5</b>	MKS4D031002A00_	4	9	10	<b>7.5</b>	MKS4F031002C00_
	4	9	13	10	MKS4D031003C00_	4	9	13	10	MKS4F031003C00_
0.15 "	3	8.5	10	<b>7.5</b>	MKS4D031502B00_	5	10.5	10.3	<b>7.5</b>	MKS4F031502E00_
	4	9	13	10	MKS4D031503C00_	4	9	13	10	MKS4F031503C00_
0.22 "	3	8.5	10	<b>7.5</b>	MKS4D032202B00_	5	10.5	10.3	<b>7.5</b>	MKS4F032202E00_
	4	9	13	10	MKS4D032203C00_	5	11	13	10	MKS4F032203F00_
0.33 "	4	9	10	<b>7.5</b>	MKS4D033302C00_	5.7	12.5	10.3	<b>7.5</b>	MKS4F033302F00_
	4	9	13	10	MKS4D033303C00_	5	11	13	10	MKS4F033303F00_
0.47 "	4.5	9.5	10.3	<b>7.5</b>	MKS4D034702D00_	6	12	13	10	MKS4F034703G00_
	4	9	13	10	MKS4D034703C00_	6	12.5	18	15	MKS4F034704C00_
0.68 "	5	10.5	10.3	<b>7.5</b>	MKS4D036802E00_	7	14	18	15	MKS4F036804D00_
	4	9	13	10	MKS4D036803C00_					
1.0 $\mu\text{F}$	5.7	12.5	10.3	<b>7.5</b>	MKS4D041002F00_	8	15	18	15	MKS4F041004F00_
	5	11	13	10	MKS4D041003F00_	6	15	26.5	22.5	MKS4F041005B00_
1.5 "	6	12	13	10	MKS4D041503G00_	9	16	18	15	MKS4F041504J00_
	7	14	18	15	MKS4D041504D00_	7	16.5	26.5	22.5	MKS4F041505D00_
2.2 "	8	15	18	15	MKS4D042204F00_	10.5	19	26.5	22.5	MKS4F042205G00_
	6	15	26.5	22.5	MKS4D042205B00_	9	19	31.5	27.5	MKS4F042206A00_
3.3 "	9	16	18	15	MKS4D043304J00_	11	21	26.5	22.5	MKS4F043305I00_
	7	16.5	26.5	22.5	MKS4D043305D00_	11	21	31.5	27.5	MKS4F043306B00_
4.7 "	10.5	19	26.5	22.5	MKS4D044705G00_	11	21	31.5	27.5	MKS4F044706B00_
	9	19	31.5	27.5	MKS4D044706A00_					
6.8 "	10.5	19	26.5	22.5	MKS4D046805G00_	13	24	31.5	27.5	MKS4F046806D00_
	11	21	31.5	27.5	MKS4D046806B00_					
10 $\mu\text{F}$	13	24	31.5	27.5	MKS4D051006D00_	17	29	31.5	27.5	MKS4F051006G00_
	13	24	31.5	27.5	MKS4D051506D00_	17	34.5	31.5	27.5	MKS4F051506I00_
22 "	15	26	31.5	27.5	MKS4D052206F00_	17	29	41.5	37.5	MKS4F051507E00_
	17	29	31.5	27.5	MKS4D053306G00_	19	32	41.5	37.5	MKS4F052207F00_
33 "	13	24	41.5	37.5	MKS4D053307C00_	24	45.5	41.5	37.5	MKS4F053307H00_
	17	29	41.5	37.5	MKS4D054707E00_					
47 "	17	29	41.5	37.5	MKS4D054707E00_					
	20	39.5	41.5	37.5	MKS4D056807G00_					
68 "	20	39.5	41.5	37.5	MKS4D056807G00_					
100 $\mu\text{F}$	24	45.5	41.5	37.5	MKS4D061007H00_					

\* AC voltage:  $f = 50 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

\*\*PCM = Printed circuit module = lead spacing

Dims. in mm.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Lead length: 6-2 = SD

Taped version see page 127.

Rights reserved to amend design data without prior notification.

Continuation page 48

## Continuation

### General Data

Capacitance	400 VDC/200 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 $\mu$ F	3	8.5	10	<b>7.5</b>	MKS4G021002B00_	3	8.5	10	<b>7.5*</b>	MKS4J021002B00_
	4	9	13	10	MKS4G021003C00_	4	9	13	10	MKS4J021003C00_
0.015 "	3	8.5	10	<b>7.5</b>	MKS4G021502B00_	4	9	10	<b>7.5*</b>	MKS4J021502C00_
	4	9	13	10	MKS4G021503C00_	4	9	13	10	MKS4J021503C00_
0.022 "	4	9	10	<b>7.5</b>	MKS4G022202C00_	4.5	9.5	10.3	<b>7.5*</b>	MKS4J022202D00_
	4	9	13	10	MKS4G022203C00_	4	9	13	10	MKS4J022203C00_
0.033 "	4	9	10	<b>7.5</b>	MKS4G023302C00_	5	10.5	10.3	<b>7.5*</b>	MKS4J023302E00_
	4	9	13	10	MKS4G023303C00_	5	11	13	10	MKS4J023303F00_
0.047 "	5	10.5	10.3	<b>7.5</b>	MKS4G024702E00_	5.7	12.5	10.3	<b>7.5*</b>	MKS4J024702F00_
	4	9	13	10	MKS4G024703C00_	6	12	13	10	MKS4J024703G00_
0.068 "	5	10.5	10.3	<b>7.5</b>	MKS4G026802E00_	6	12	13	10	MKS4J026803G00_
	4	9	13	10	MKS4G026803C00_	5	11	18	15	MKS4J026804B00_
0.1 $\mu$ F	5	10.5	10.3	<b>7.5</b>	MKS4G031002E00_	6	12.5	18	15	MKS4J031004C00_
	5	11	13	10	MKS4G031003F00_	6	15	26.5	22.5	MKS4J031005B00_
0.15 "	5.7	12.5	10.3	<b>7.5</b>	MKS4G031502F00_	7	14	18	15	MKS4J031504D00_
	6	12	13	10	MKS4G031503G00_	6	15	26.5	22.5	MKS4J031505B00_
0.22 "	6	12	13	10	MKS4G032203G00_	8	15	18	15	MKS4J032204F00_
	6	12.5	18	15	MKS4G032204C00_	6	15	26.5	22.5	MKS4J032205B00_
0.33 "	8	15	18	15	MKS4G033304F00_	7	16.5	26.5	22.5	MKS4J033305D00_
						9	19	31.5	27.5	MKS4J033306A00_
0.47 "	8	15	18	15	MKS4G034704F00_	10.5	19	26.5	22.5	MKS4J034705G00_
	6	15	26.5	22.5	MKS4G034705B00_	9	19	31.5	27.5	MKS4J034706A00_
0.68 "	7	16.5	26.5	22.5	MKS4G036805D00_	11	21	26.5	22.5	MKS4J036805I00_
						11	21	31.5	27.5	MKS4J036806B00_
1.0 $\mu$ F	10.5	19	26.5	22.5	MKS4G041005G00_	11	21	31.5	27.5	MKS4J041006B00_
	11	21	31.5	27.5	MKS4G041006B00_					
1.5 "	11	21	26.5	22.5	MKS4G041505I00_	15	26	31.5	27.5	MKS4J041506F00_
	11	21	31.5	27.5	MKS4G041506B00_					
2.2 "	11	21	31.5	27.5	MKS4G042206B00_	17	34.5	31.5	27.5	MKS4J042206I00_
						15	26	41.5	37.5	MKS4J042207D00_
3.3 "	13	24	31.5	27.5	MKS4G043306D00_	20	39.5	31.5	27.5	MKS4J043306J00_
						19	32	41.5	37.5	MKS4J043307F00_
4.7 "	17	29	31.5	27.5	MKS4G044706G00_	20	39.5	41.5	37.5	MKS4J044707G00_
6.8 "	17	34.5	31.5	27.5	MKS4G046806I00_	24	45.5	41.5	37.5	MKS4J046807H00_
	15	26	41.5	37.5	MKS4G046807D00_					
10 $\mu$ F	19	32	41.5	37.5	MKS4G051007F00_					
15 "	20	39.5	41.5	37.5	MKS4G051507G00_					

\* AC voltage:  $f = 50 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\*PCM = Printed circuit module = lead spacing

\* Admissible AC voltage 250 VAC max.

Dims. in mm.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Lead length: 6-2 = SD

Taped version see page 127.

Rights reserved to amend design data without prior notification.

Continuation page 49

## Continuation

### General Data

Capacitance	1000 VDC/400 VAC*					1500 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	3	8.5	10	7.5	MKS4O111002B00_____	4	9	13	10	MKS4S011003C00_____
	4	9	13	10	MKS4O111003C00_____					
1500 "	3	8.5	10	7.5	MKS4O111502B00_____	4	9	13	10	MKS4S011503C00_____
	4	9	13	10	MKS4O111503C00_____					
2200 "	3	8.5	10	7.5	MKS4O112202B00_____	4	9	13	10	MKS4S012203C00_____
	4	9	13	10	MKS4O112203C00_____					
3300 "	4	9	10	7.5	MKS4O113302C00_____	4	9	13	10	MKS4S013303C00_____
	4	9	13	10	MKS4O113303C00_____					
4700 "	4	9	10	7.5	MKS4O114702C00_____	4	9	13	10	MKS4S014703C00_____
	4	9	13	10	MKS4O114703C00_____	5	11	18	15	MKS4S014704B00_____
6800 "	4.5	9.5	10.3	7.5	MKS4O116802D00_____	5	11	13	10	MKS4S016803F00_____
	4	9	13	10	MKS4O116803C00_____	5	11	18	15	MKS4S016804B00_____
0.01 µF	5	10.5	10.3	7.5	MKS4O121002E00_____	6	12	13	10	MKS4S021003G00_____
	5	11	13	10	MKS4O121003F00_____	5	11	18	15	MKS4S021004B00_____
0.015 "	5.7	12.5	10.3	7.5	MKS4O121502F00_____	6	12.5	18	15	MKS4S021504C00_____
	6	12	13	10	MKS4O121503G00_____					
0.022 "	5	11	18	15	MKS4O122204B00_____	7	14	18	15	MKS4S022204D00_____
						6	15	26.5	22.5	MKS4S022205B00_____
0.033 "	6	12.5	18	15	MKS4O123304C00_____	8	15	18	15	MKS4S023304F00_____
	6	15	26.5	22.5	MKS4O123305B00_____	6	15	26.5	22.5	MKS4S023305B00_____
0.047 "	7	14	18	15	MKS4O124704D00_____	7	16.5	26.5	22.5	MKS4S024705D00_____
	6	15	26.5	22.5	MKS4O124705B00_____					
0.068 "	8	15	18	15	MKS4O126804F00_____	8.5	18.5	26.5	22.5	MKS4S026805F00_____
	6	15	26.5	22.5	MKS4O126805B00_____					
0.1 µF	9	16	18	15	MKS4O131004J00_____	10.5	19	26.5	22.5	MKS4S031005G00_____
	7	16.5	26.5	22.5	MKS4O131005D00_____	9	19	31.5	27.5	MKS4S031006A00_____
0.15 "	8.5	18.5	26.5	22.5	MKS4O131505F00_____	11	21	31.5	27.5	MKS4S031506B00_____
0.22 "	10.5	19	26.5	22.5	MKS4O132205G00_____	13	24	31.5	27.5	MKS4S032206D00_____
0.33 "	11	21	26.5	22.5	MKS4O133305I00_____	17	34.5	31.5	27.5	MKS4S033306I00_____
	11	21	31.5	27.5	MKS4O133306B00_____	17	29	41.5	37.5	MKS4S033307E00_____
0.47 "	13	24	31.5	27.5	MKS4O134706D00_____	20	39.5	31.5	27.5	MKS4S034706J00_____
						17	29	41.5	37.5	MKS4S034707E00_____
0.68 "	15	26	31.5	27.5	MKS4O136806F00_____	20	39.5	41.5	37.5	MKS4S036807G00_____
1.0 µF	17	29	31.5	27.5	MKS4O141006G00_____	24	45.5	41.5	37.5	MKS4S041007H00_____
	17	29	41.5	37.5	MKS4O141007E00_____					
1.5 "	19	32	41.5	37.5	MKS4O141507F00_____					
2.2 "	20	39.5	41.5	37.5	MKS4O142207G00_____					
3.3 "	24	45.5	41.5	37.5	MKS4O143307H00_____					

\* AC voltage:  $f = 50 \text{ Hz}; 1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

\*\* PCM = Printed circuit module = lead spacing

Dims. in mm.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Lead length: 6-2 = SD

Taped version see page 127.

Rights reserved to amend design data without prior notification.

Continuation page 50

## Continuation

### General Data

Capacitance	2000 VDC/400 VAC*					The values of the WIMA MKM 4 ranges according to the main catalogue 2009 are still available on request.
	W	H	L	PCM**	Part number	
1000 pF	4	9	13	10	MKS4U011003C00_	
1500 "	4	9	13	10	MKS4U011503C00_	
2200 "	5	11	13	10	MKS4U012203F00_	
3300 "	6	12	13	10	MKS4U013303H00_	
	5	11	18	15	MKS4U013304B00_	
4700 "	5	11	18	15	MKS4U014704B00_	
6800 "	6	12.5	18	15	MKS4U016804C00_	
0.01 µF	7	14	18	15	MKS4U021004D00_	
	6	15	26.5	22.5	MKS4U021005B00_	
0.015 "	6	15	26.5	22.5	MKS4U021505B00_	
0.022 "	7	16.5	26.5	22.5	MKS4U022205D00_	
0.033 "	10.5	19	26.5	22.5	MKS4U023305G00_	
0.047 "	11	21	26.5	22.5	MKS4U024705I00_	
	11	21	31.5	27.5	MKS4U024706B00_	
0.068 "	11	21	31.5	27.5	MKS4U026806B00_	
0.1 µF	13	24	31.5	27.5	MKS4U031006D00_	
0.15 "	17	29	31.5	27.5	MKS4U031506G00_	
	13	24	41.5	37.5	MKS4U031507C00_	
0.22 "	17	29	41.5	37.5	MKS4U032207E00_	
0.33 "	20	39.5	41.5	37.5	MKS4U033307G00_	
0.47 "	24	45.5	41.5	37.5	MKS4U034707H00_	

Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Lead length:	6-2 = SD
Taped version see page 127.	


\* AC voltage:  $f = 50 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

\*\* PCM = Printed circuit module = lead spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

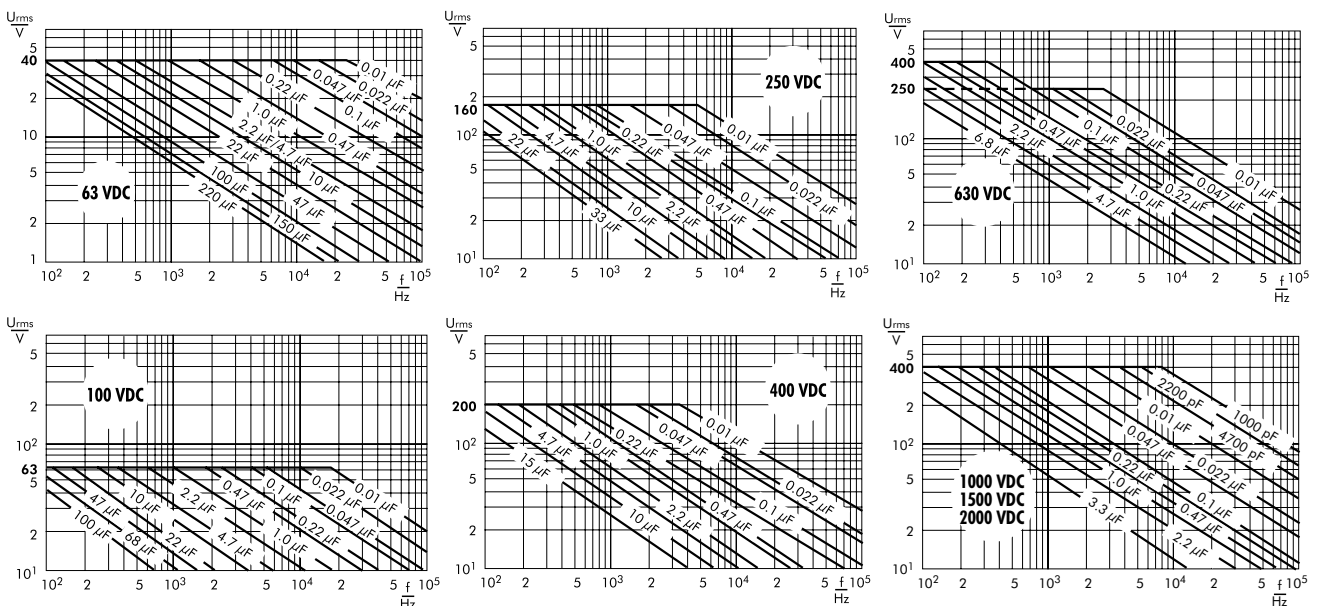

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

A preheating of through-hole WIMA capacitors is allowed for temperatures  $T_{\max} < 100^{\circ}\text{C}$ . In practice a preheating duration of  $t < 5$  min. has been proven to be best.


#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}\text{C}$   
Immersion time:  $t < 5$  sec

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}\text{C}$   
Immersion time:  $2 \times t < 3$  sec

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

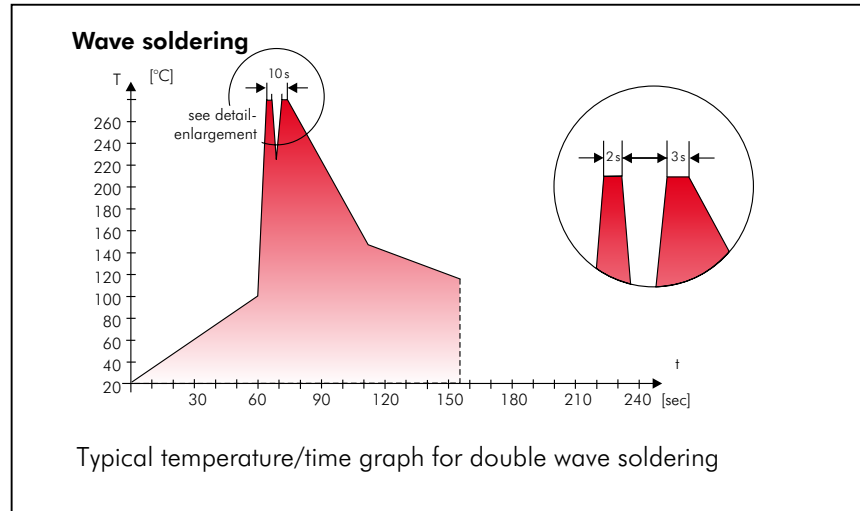

## WIMA Quality and Environmental Philosophy

### ISO 9001:2000 Certification

ISO 9001:2000 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2000 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- lead attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2002/95/EC certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2002/95/EG

WIMA capacitors are lead free in accordance with RoHS 2002/95/EC

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2005

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2005. The certification has been granted in June 2006.

# Typical Dimensions for Taping Configuration

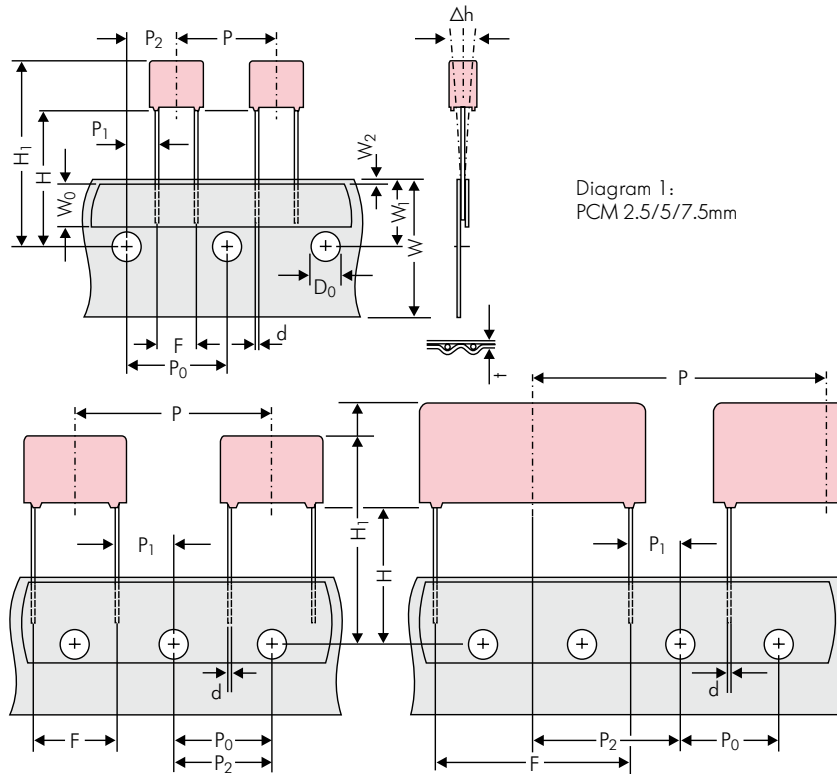


Diagram 1:  
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to lead	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0
Lead spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Lead diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 128)	ROLL/AMMO			AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions	REEL	φ 360 max. φ 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1
Unit	see details page 130.							

Dims in mm.

\* Diameter of leads see General Data.

\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible

Please clarify customer-specific deviations with the manufacturer.



# Packing Quantities for Bulk Capacitors and TPS\*



PCM	Size				pcs. per packaging unit bulk			pcs. per packaging unit/TPS*	
	W	H	L	Codes	Mini <b>M</b>	Standard <b>S</b>	Maxi <b>G</b>	Mini <b>X</b>	Standard <b>Y</b>
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	1000	5000	10 000	-	-
	3	7.5	4.6	<b>0C</b>	1000	5000	10 000	-	-
	3.8	8.5	4.6	<b>0D</b>	1000	5000	10 000	-	-
	4.6	9	4.6	<b>0E</b>	1000	5000	10 000	-	-
	5.5	10	4.6	<b>0F</b>	1000	5000	10 000	-	-
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	2000	5000	10 000	-	-
	3	7.5	7.2	<b>1B</b>	1000	5000	-	-	-
	3.5	8.5	7.2	<b>1C</b>	1000	5000	-	-	-
	4.5	6	7.2	<b>1D</b>	1000	6000	-	-	-
	4.5	9.5	7.2	<b>1E</b>	1000	4000	-	-	-
	5	10	7.2	<b>1F</b>	1000	3500	-	-	-
	5.5	7	7.2	<b>1G</b>	1000	4000	-	-	-
	5.5	11.5	7.2	<b>1H</b>	500	2500	-	-	-
	6.5	8	7.2	<b>1I</b>	1000	2500	-	-	-
	7.2	8.5	7.2	<b>1J</b>	500	2500	-	-	-
	7.2	13	7.2	<b>1K</b>	500	2000	-	-	-
	8.5	10	7.2	<b>1L</b>	500	2000	-	-	-
	8.5	14	7.2	<b>1M</b>	500	1500	-	-	-
11	16	7.2	<b>1N</b>	250	1000	-	-	-	
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	1000	5000	-	-	-
	3	8.5	10	<b>2B</b>	1000	5000	-	-	-
	4	9	10	<b>2C</b>	1000	4000	-	-	-
	4.5	9.5	10.3	<b>2D</b>	1000	3500	-	-	-
	5	10.5	10.3	<b>2E</b>	1000	3000	-	-	-
	5.7	12.5	10.3	<b>2F</b>	500	2000	-	-	-
	7.2	12.5	10.3	<b>2G</b>	500	1500	-	-	-
<b>10 mm</b>	3	9	13	<b>3A</b>	1000	3000	-	-	-
	4	8.5	13.5	<b>3A</b>	500	3000	-	-	-
	4	9	13	<b>3C</b>	1000	3000	-	-	-
	4	9.5	13	<b>3D</b>	1000	3000	-	-	-
	5	10	13.5	<b>3B</b>	500	2000	-	-	-
	5	11	13	<b>3F</b>	1000	3000	-	-	-
	6	12	13	<b>3G</b>	800	2400	-	-	-
	6	12.5	13	<b>3H</b>	800	2400	-	-	-
8	12	13	<b>3I</b>	500	2000	-	-	-	
<b>15 mm</b>	5	11	18	<b>4B</b>	800	2400	-	-	-
	5	13	19	<b>4C</b>	200	1000	-	-	-
	6	12.5	18	<b>4C</b>	500	2000	-	-	-
	6	14	19	<b>4D</b>	250	1000	-	-	-
	7	14	18	<b>4D</b>	400	1600	-	-	-
	7	15	19	<b>4E</b>	250	1000	-	-	-
	8	15	18	<b>4F</b>	400	1200	-	-	-
	8	17	19	<b>4F</b>	100	500	-	-	-
	9	14	18	<b>4H</b>	400	1200	-	-	-
	9	16	18	<b>4J</b>	300	900	-	-	-
	10	18	19	<b>4G</b>	100	500	-	-	-
11	14	18	<b>4M</b>	300	1000	-	-	-	
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	300	1200	-	-	-
	6	15	26.5	<b>5B</b>	250	1000	-	-	-
	7	16.5	26.5	<b>5D</b>	190	760	-	-	-
	8	20	28	<b>5H</b>	125	500	-	-	-
	8.5	18.5	26.5	<b>5F</b>	125	500	-	-	-
	10	22	28	<b>5I</b>	-	-	-	90	540
	10.5	19	26.5	<b>5G</b>	-	-	-	170	680
	10.5	20.5	26.5	<b>5H</b>	-	-	-	170	680
	11	21	26.5	<b>5I</b>	-	-	-	170	680
	12	24	28	<b>5J</b>	-	-	-	75	450
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	-	-	-	160	640
	11	21	31.5	<b>6B</b>	-	-	-	136	544
	13	24	31.5	<b>6D</b>	-	-	-	112	448
	13	25	33	<b>6K</b>	-	-	-	56	336
	15	26	31.5	<b>6F</b>	-	-	-	96	384
	15	26	33	<b>6L</b>	-	-	-	48	288
	17	29	31.5	<b>6G</b>	-	-	-	88	176
	17	34.5	31.5	<b>6I</b>	-	-	-	88	176
	20	32	33	<b>6M</b>	-	-	-	36	216
	20	39.5	31.5	<b>6J</b>	-	-	-	36	144
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	-	-	-	60	480
	11	22	41.5	<b>7B</b>	-	-	-	51	408
	13	24	41.5	<b>7C</b>	-	-	-	84	252
	15	26	41.5	<b>7D</b>	-	-	-	72	144
	17	29	41.5	<b>7E</b>	-	-	-	66	132
	19	32	41.5	<b>7F</b>	-	-	-	54	108
	20	39.5	41.5	<b>7G</b>	-	-	-	27	108
	24	45.5	41.5	<b>7H</b>	-	-	-	21	84



## Packing Units for Taped Capacitors with Radial Leads

PCM	Size				ROLL		REEL				AMMO			
					H16.5	H18.5	ø 360		ø 500		340 x 340		490 x 370	
	W	H	L	Codes	N	O	F	I	H	J	A	C	B	D
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	2200		2500				2800			
	3	7.5	4.6	<b>0C</b>	2000		2300				2300			
	3.8	8.5	4.6	<b>0D</b>	1500		1800				1800			
	4.6	9	4.6	<b>0E</b>	1200		1500				1500			
	5.5	10	4.6	<b>0F</b>	900		1200				1200			
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	2200		2500				2800			
	3	7.5	7.2	<b>1B</b>	2000		2300				2300			
	3.5	8.5	7.2	<b>1C</b>	1600		2000				2000			
	4.5	6	7.2	<b>1D</b>	1300		1500				1500			
	4.5	9.5	7.2	<b>1E</b>	1300		1500				1500			
	5	10	7.2	<b>1F</b>	1100		1400				1400			
	5.5	7	7.2	<b>1G</b>	1000		1200				1200			
	5.5	11.5	7.2	<b>1H</b>	1000		1200				1200			
	6.5	8	7.2	<b>1I</b>	800		1000				1000			
	7.2	8.5	7.2	<b>1J</b>	700		1000				1000			
	7.2	13	7.2	<b>1K</b>	700		950				1000			
	8.5	10	7.2	<b>1L</b>	600		800				800			
	8.5	14	7.2	<b>1M</b>	600		800				800			
11	16	7.2	<b>1N</b>	500		700				700				
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>			2500		4400		2500			
	3	8.5	10	<b>2B</b>			2200		4300		2300		4150	
	4	9	10	<b>2C</b>			1700		3200		1700		3100	
	4.5	9.5	10.3	<b>2D</b>			1500		2900		1400		2800	
	5	10.5	10.3	<b>2E</b>			1300		2500		1300			
	5.7	12.5	10.3	<b>2F</b>			1000		2200		1100			
	7.2	12.5	10.3	<b>2G</b>			900		1800		1000			
<b>10 mm</b>	3	9	13	<b>3A</b>			1100		2200				1900	
	4	8.5	13.5	<b>FA</b>			900		1600				1450	
	4	9	13	<b>3C</b>			900		1600				1450	
	4	9.5	13	<b>3D</b>			900		1600				1400	
	5	10	13.5	<b>FB</b>			700		1300				1200	
	5	11	13	<b>3F</b>			700		1300				1200	
	6	12	13	<b>3G</b>			550		1100				1000	
	6	12.5	13	<b>3H</b>			550		1100				1000	
8	12	13	<b>3I</b>			400		800				740		
<b>15 mm</b>	5	11	18	<b>4B</b>			600		1200				1150	
	5	13	19	<b>FC</b>			600		1200				1200	
	6	12.5	18	<b>4C</b>			500		1000				1000	
	6	14	19	<b>FD</b>			500		1000				1000	
	7	14	18	<b>4D</b>			450		900				850	
	7	15	19	<b>FE</b>			450		900				850	
	8	15	18	<b>4F</b>			400		800				740	
	8	17	19	<b>FF</b>			400		800				740	
	9	14	18	<b>4H</b>			350		700				650	
	9	16	18	<b>4J</b>			350		700				650	
	10	18	19	<b>FG</b>			300		650				590	
11	14	18	<b>4M</b>			300		600				540		
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>					800				770	
	6	15	26.5	<b>5B</b>					700				640	
	7	16.5	26.5	<b>5D</b>					600				550	
	8	20	28	<b>FH</b>					500				480	
	8.5	18.5	26.5	<b>5F</b>					480				450	
	10	22	28	<b>FI</b>					420				380	
	10.5	19	26.5	<b>5G</b>					400				360	
	10.5	20.5	26.5	<b>5H</b>					400				360	
	11	21	26.5	<b>5I</b>					380				350	
	12	24	28	<b>FJ</b>					350				310	
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>					460/340*				420	
	11	21	31.5	<b>6B</b>					380/280*				350	
	13	24	31.5	<b>6D</b>					300				290	
	15	26	31.5	<b>6F</b>					270				250	

\* for 2-inch transport pitches.

Samples and pre-production needs 1 packing unit minimum.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Special features (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT                  SMD-PPS = SMDI                  FKP 02 = FKP0                  MKS 02 = MKS0                  FKS 2 = FKS2                  FKP 2 = FKP2                  MKS 2 = MKS2                  MKP 2 = MKP2                  FKS 3 = FKS3                  FKP 3 = FKP3                  MKS 4 = MKS4                  MKP 4 = MKP4                  MKP 10 = MKP1                  FKP 4 = FKP4                  FKP 1 = FKP1                  MKP-X2 = MKX2                  MKP-X2 R = MKXR                  MKP-Y2 = MKY2                  MP 3-X2 = MPX2                  MP 3-X1 = MPX1                  MP 3-Y2 = MPY2                  MP 3R-Y2 = MPRY                  Snubber MKP = SNMP                  Snubber FKP = SNFP                  GTO MKP = GTOM                  DC-LINK MKP 4 = DCP4                  DC-LINK MKP C = DCPC                  DC-LINK HC = DCH_                  SuperCap C = SCSC                  SuperCap MC = SMC                  SuperCap R = SCSR                  SuperCap MR = SCMR</p>	<p><b>Rated voltage:</b></p> <p>2.5 VDC = A1                  4 VDC = A2                  14 VDC = A3                  28 VDC = A4                  40 VDC = A5                  5 VDC = A6                  50 VDC = B0                  63 VDC = C0                  100 VDC = D0                  160 VDC = E0                  250 VDC = F0                  400 VDC = G0                  450 VDC = H0                  600 VDC = I0                  630 VDC = J0                  700 VDC = K0                  800 VDC = L0                  850 VDC = M0                  900 VDC = N0                  1000 VDC = O1                  1100 VDC = P0                  1200 VDC = Q0                  1250 VDC = R0                  1500 VDC = S0                  1600 VDC = T0                  2000 VDC = U0                  2500 VDC = V0                  3000 VDC = W0                  4000 VDC = X0                  6000 VDC = Y0                  250 VAC = 0W                  275 VAC = 1W                  300 VAC = 2W                  400 VAC = 3W                  440 VAC = 4W                  500 VAC = 5W</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022                  47 pF = 0047                  100 pF = 0100                  150 pF = 0150                  220 pF = 0220                  330 pF = 0330                  470 pF = 0470                  680 pF = 0680                  1000 pF = 1100                  1500 pF = 1150                  2200 pF = 1220                  3300 pF = 1330                  4700 pF = 1470                  6800 pF = 1680                  0.01 µF = 2100                  0.022 µF = 2220                  0.047 µF = 2470                  0.1 µF = 3100                  0.22 µF = 3220                  0.47 µF = 3470                  1 µF = 4100                  2.2 µF = 4220                  4.7 µF = 4470                  10 µF = 5100                  22 µF = 5220                  47 µF = 5470                  100 µF = 6100                  220 µF = 6220                  1 F = A010                  2.5 F = A025                  50 F = A500                  100 F = B100                  110 F = B110                  600 F = B600                  1200 F = C120                  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = X1                  4.8x3.3x4 Size 1812 = X2                  5.7x5.1x3.5 Size 2220 = Y1                  5.7x5.1x4.5 Size 2220 = Y2                  7.2x6.1x3 Size 2824 = T1                  7.2x6.1x5 Size 2824 = T2                  10.2x7.6x5 Size 4030 = K1                  12.7x10.2x6 Size 5040 = V1                  15.3x13.7x7 Size 6054 = Q1                  2.5x7x4.6 PCM 2.5 = 0B                  3x7.5x4.6 PCM 2.5 = 0C                  2.5x6.5x7.2 PCM 5 = 1A                  3x7.5x7.2 PCM 5 = 1B                  2.5x7x10 PCM 7.5 = 2A                  3x8.5x10 PCM 7.5 = 2B                  3x9x13 PCM 10 = 3A                  4x9x13 PCM 10 = 3C                  5x11x18 PCM 15 = 4B                  6x12.5x18 PCM 15 = 4C                  5x14x26.5 PCM 22.5 = 5A                  6x15x26.5 PCM 22.5 = 5B                  9x19x31.5 PCM 27.5 = 6A                  11x21x31.5 PCM 27.5 = 6B                  9x19x41.5 PCM 37.5 = 7A                  11x22x41.5 PCM 37.5 = 7B                  94x49x182 DCH_ = H0                  94x77x182 DCH_ = H1                  ...</p>	<p><b>Tolerance:</b></p> <p>20% = M                  10% = K                  5% = J                  2.5% = H                  1% = E                  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A                  AMMO H16.5 490x370 = B                  AMMO H18.5 340x340 = C                  AMMO H18.5 490x370 = D                  REEL H16.5 360 = F                  REEL H16.5 500 = H                  REEL H18.5 360 = I                  REEL H18.5 500 = J                  ROLL H16.5 = N                  ROLL H18.5 = O                  BLISTER W12 180 = P                  BLISTER W12 330 = Q                  BLISTER W16 330 = R                  BLISTER W24 330 = T                  Bulk Mini = M                  Bulk Standard = S                  Bulk Maxi = G                  TPS Mini = X                  TPS Standard = Y                  ...</p>	<p><b>Special features:</b></p> <p>Standard = 00                  Version A1 = 1A                  Version A1.1.1 = 1B                  Version A1.2 = 1C                  ...</p>	<p><b>Lead length (untaped)</b></p> <p>3.5 ±0.5 = C9                  6 -2 = SD                  16 ±1 = P1                  ...</p>
--	--	---	---	--	--	--

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [WIMA](#) manufacturer:*

Other Similar products are found below :

[FKP1/0.047/20/400](#) [DCP5K05590D000KS00](#) [SMD-PET-KIT1](#) [FKP1U024707E00JSSD](#) [SMDTD03470TB00KQ00](#) [KIT SMD PET 02](#)  
[FKP1T031007E00JSSD](#) [DCP5R25160D000KS00](#) [KIT MKS](#) [MKP1F033305B00JSSD](#) [MKP1O141007G00KYSD](#) [FKS3/0.01/10/100](#)  
[DCP4P053008AD4KSSD](#) [FKP1T011504D00JSSD](#) [MKP2G014701B00JSSD](#) [MKP1T016804B00JSSD](#) [204220DM](#) [FKP-KIT](#) [KIT FKP](#)  
[MKS4C046804F00JF00](#) [FKP2D011001D00ESSD](#) [MKP1F033304F00JSSD](#) [SMDTG03470YA00KT00](#) [DCP4I061009HD2KYSD](#)  
[FKP1U011004D00KSSD](#) [MKP1G032204J00MSSD](#) [MKP1J041006G00JSSD](#) [MPY20W2220FE00MSSD](#) [MKS4C046804F00KSSD](#)  
[MKS2C024701A00JF00](#) [MKP4F046806G00JSSD](#) [MKP4F041505G00JYSD](#) [GTOMS04400GB00MS00](#) [FKP2J021001L00HI00](#)  
[GTOMS04800GD00MS00](#) [DCP6R26250E100KS0F](#) [MKP2D024701C00JO00](#) [MKP4O121002F00KSSD](#) [SNMPO145008LD4KSSD](#)  
[MKP4D053307H00KSSD](#) [DCP5R25400D100KS00](#) [MKS4C034703C00KSSD](#) [WWK-101](#) [MKS-KIT](#) [GTOMS04350GA00MS00](#)  
[GTOMS04300GA00KS00](#) [SMDTC03470QA00KP00](#) [DCP4L051506JD2KYSD](#) [MKP4-.68/400/5P22](#) [MKS4C046805D00JSSD](#)