SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE	12	Vdc	
OPERATING VOLTAGE RANGE	3 ~ 20	Vdc	
RATED CURRENT (MAX)	10	mA	
MINIMUM SPL @ 10 CM	106	dBA	
RESONANT FREQUENCY	2,800 ± 500	Hz	
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec	
OPERATING TEMPERATURE	-20 ~ +60	°C	
STORAGE TEMPERATURE	-30 ~ +70	°C	
HOUSING MATERIAL	ABS	-	
TERMINAL MATERIAL	LEAD WIRE	-	
WEIGHT	15	grams	

1. ALL DIMENSIONS ARE IN MILLIMETERS.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

WITHOUT NOTICE.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

	REVISION HISTORY		
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/8/2005	
Α	REVISED COLOR OF WIRE LEADS	10/11/2007	R.W.
В	REVISED GAUGE OF WIRE LEADS	7/3/2008	B.R.
С		10/10/2008	E.P.

Approved by

E.P.

Indicator

AI-4228-TF-LW140-3-R

Date

11/9/2004 10/10/2008

Drawn Date


1/1

Checked by

B.R.

Date

11/9/2005

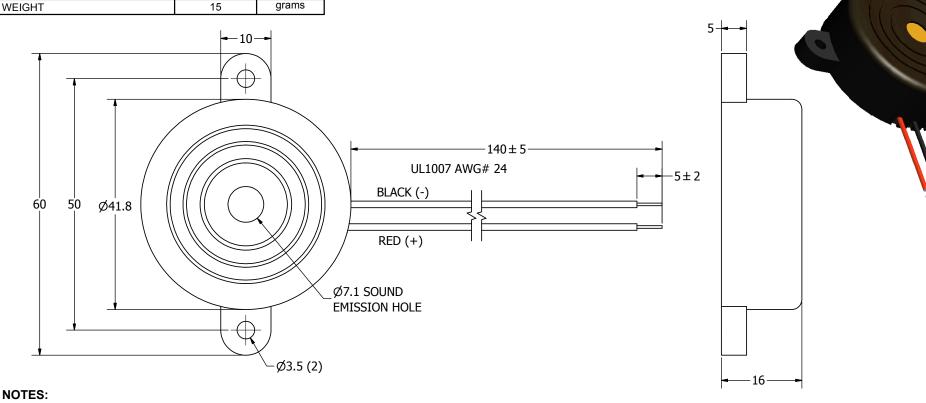

UNLESS OTHERWISE

SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AI-4228-TF-LW140-3-R.idw

Designed by

SIZE

Date

11/8/2005

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Projects Unlimited manufacturer:

Other Similar products are found below:

AW-15SBW AOM-4546L-R AI-383 AT-1438-TWT-R AI-4328-P-FP250-R AI-4329-P-FP28-R X-4032-TF-LW105-R X-4035-TFL-LW140-R POM-5242P-R AOM-4540L-R X-2629-TWT-R AT-2440-TWT-R AT-1620-TWT-12V-R SMI-1324-TW-5V-2-R AST-03032MR-R POM-1644P-NF-R AI-550 AOM-6738P-R AS01308MR-LW10 AST-030C0MR-R AI-4328-P-C28-2-R TOM-1545P-R POM-3044P-R SMT-0727-S-R AOM-6738L-R AT-1220-TWT-5V-R AOM-4540P-R ROM-2238P-NF-R AI-1440-TWT-12V-R AT-1620-TWT-R