

# Axial Lead and Cartridge Fuses

## Subminiature

### MICRO™ FUSE Very Fast-Acting Type 272/273/274/278/279 Series

UL SP QPL

Developed originally for the U.S. Space Program, MICRO fuse provides reliability in a compact design. The MICRO fuse is available in plug in or radial lead styles and a complete range of ampere ratings from 1/500 to 5 amperes to suit a wide variety of design needs.

#### ELECTRICAL CHARACTERISTICS:

| % of Ampere Rating | Ampere Rating | Opening Time              |
|--------------------|---------------|---------------------------|
| 100%               | 1/500–5       | 4 hours, <b>Minimum</b>   |
| 200%               | 1/500–3/10    | 5 seconds, <b>Maximum</b> |
|                    | 4/10–5        | 2 seconds, <b>Maximum</b> |

**AGENCY APPROVALS:** Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

**AGENCY FILE NUMBERS:** UL E10480, CSA LR 29862.

**INTERRUPTING RATING:** 10,000 amperes at 125 VAC/VDC.

**FUSES TO MIL SPEC:** 273 Series is available in Military QPL type (FM02). To order, change 273 to 274.



#### Operating Temperature:

273 and 279: -55°C to 85°C.  
272 and 278: -55°C to 125°C

#### PATENTED


#### ORDERING INFORMATION:

| Plug-In        |                | Radial Lead    |                | Ampere Rating | Voltage Rating | Nominal Resistance Cold Ohms | Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec. |
|----------------|----------------|----------------|----------------|---------------|----------------|------------------------------|--|
| Catalog Number | Catalog Number | Catalog Number | Catalog Number |               |                |                              |  |
| 272.002        | 273.002        | 278.002        | 279.002        | 1/500         | 125            | 2200                         | 0.0000000845   |
| 272.005        | 273.005        | 278.005        | 279.005        | 1/200         | 125            | 2800                         | 0.0000000810   |
| 272.010        | 273.010        | 278.010        | 279.010        | 1/100         | 125            | 80.0                         | 0.000000462  |
| 272.015        | 273.015        | 278.015        | 279.015        | 1/64          | 125            | 44.0                         | 0.00000123   |
| 272.031        | 273.031        | 278.031        | 279.031        | 1/32          | 125            | 16.0                         | 0.00000810   |
| 272.050        | 273.050        | 278.050        | 279.050        | 1/20          | 125            | 3.20                         | 0.0000666  |
| 272.062        | 273.062        | 278.062        | 279.062        | 1/16          | 125            | 2.32                         | 0.000115   |
| 272.100        | 273.100        | 278.100        | 279.100        | 1/10          | 125            | 1.25                         | 0.000385   |
| 272.125        | 273.125        | 278.125        | 279.125        | 1/8           | 125            | 1.0                          | 0.000691   |
| 272.200        | 273.200        | 278.200        | 279.200        | 2/10          | 125            | 2.30                         | 0.00409  |
| 272.250        | 273.250        | 278.250        | 279.250        | 1/4           | 125            | 1.75                         | 0.00640  |
| 272.300        | 273.300        | 278.300        | 279.300        | 3/10          | 125            | 1.25                         | 0.00945  |
| 272.400        | 273.400        | 278.400        | 279.400        | 4/10          | 125            | 0.227                        | 0.0251   |
| 272.500        | 273.500        | 278.500        | 279.500        | 1/2           | 125            | 0.167                        | 0.0716   |
| 272.600        | 273.600        | 278.600        | 279.600        | 6/10          | 125            | 0.430                        | 0.0411   |
| 272.700        | 273.700        | 278.700        | 279.700        | 7/10          | 125            | 0.324                        | 0.0710   |
| 272.750        | 273.750        | 278.750        | 279.750        | 3/4           | 125            | 0.293                        | 0.0900   |
| 272.800        | 273.800        | 278.800        | 279.800        | 8/10          | 125            | 0.271                        | 0.113  |
| 272.001        | 273.001        | 278.001        | 279.001        | 1             | 125            | 0.0880                       | 0.0648   |
| 272.01.5       | 273.01.5       | 278.01.5       | 279.01.5       | 1½            | 125            | 0.0578                       | 0.160  |
| 272.002        | 273.002        | 278.002        | 279.002        | 2             | 125            | 0.0425                       | 0.300  |
| 272.003        | 273.003        | 278.003        | 279.003        | 3             | 125            | 0.0275                       | 0.759  |
| 272.004        | 273.004        | 278.004        | 279.004        | 4             | 125            | 0.0202                       | 1.38   |
| 272.005        | 273.005        | 278.005        | 279.005        | 5             | 125            | 0.0156                       | 2.21   |

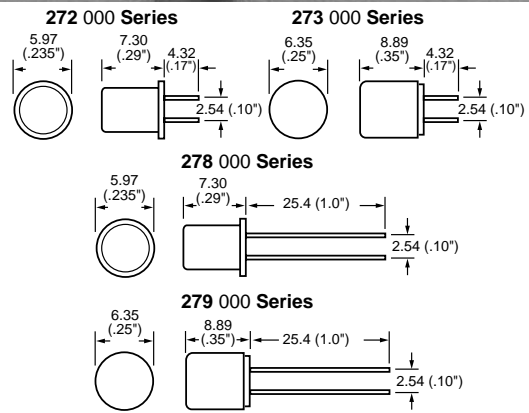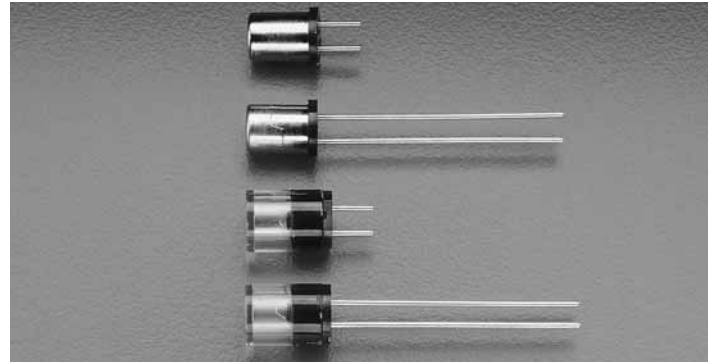

NOTE: Amperage and voltage rating stamped on cap. Leads are solder-coated copper; .025" diameter.

#### Average Time Current Curves

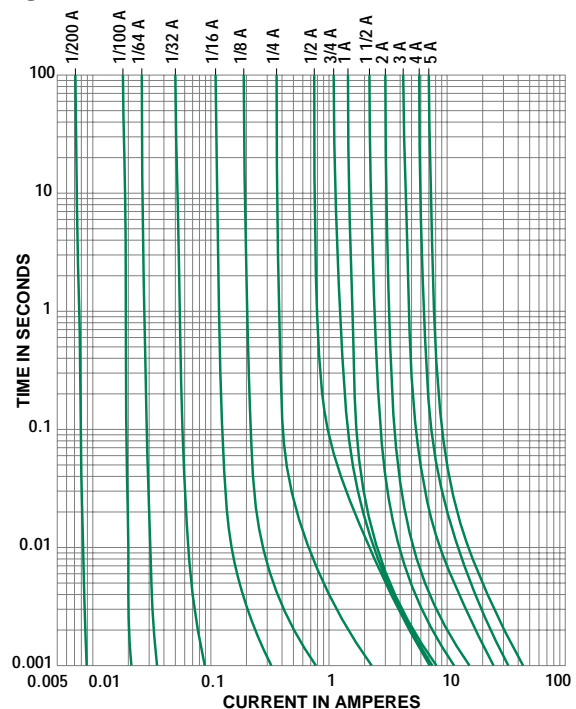

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[MAC212A8G](#) [59140-1-T-05-F](#) [59145 4 T 02 F](#) [59022-1-S-02-F](#) [59075-3-S-02-A](#) [59022-4-T-02-F](#) [V385LS40BP](#) [MDSR-7-8-10](#) [MDRR-DT-30-35-F](#) [GTCS36-750M-R10](#) [Z0109MNT1G](#) [GTCA28-231M-R05](#) [SA7.0CA](#) [RXEF185K](#) [SMD260F-2](#) [RXEF250](#) [00970019XP](#) [LX5090](#)  
[0224006.HXUP](#) [740GN](#) [MFP](#) [815.650](#) [FLA2.25](#) [FLNR600](#) [FLSR400](#) [FLSR600](#) [900-1535-012RN](#) [901-134](#) [970699013](#) [971-670A-92WCN](#)  
[153.5631.5601](#) [154-KIT](#) [155100](#) [157.5701.6271](#) [1.5KE110A-B](#) [1.5SMC150CA](#) [BLF006](#) [BLF008](#) [JLLN600.X](#) [JLLS-250](#) [235.200](#) [901-152C-042RN](#) [L15S150.T](#) [920-401X-330BN](#) [273.100](#) [282007](#) [LFC600602CID](#) [LJCA030.X](#) [SE-GRM024](#) [980-788A-070](#)