



## Stud Diode

## Rectifier Diode

SKN 26

SKR 26

### Features

- Reverse voltages up to 1600 V
- Hermetic metal case with glass insulator
- Threaded stud ISO M6 (SKR 26 also 10 - 32 UNF)
- SKN: anode to stud, SKR: cathode to stud

### Typical Applications\*

- All-purpose mean power rectifier diodes
- Cooling via metal plates or heatsinks
- Non-controllable and half-controllable rectifiers
- Free-wheeling diodes
- Recommended snubber network:  
RC: 0,05  $\mu$ F, 200  $\Omega$  ( $P_R = 1$  W),  
 $R_P = 150$  k $\Omega$  ( $P_R = 4$  W)

$V_{RSM}$ V	$V_{RRM}$ V	$I_{FRMS} = 40$ A (maximum value for continuous operation)	
		$I_{FAV} = 25$ A (sin. 180 °; $T_c = 100$ °C)	
400	400	SKN 26/04	SKR 26/04
800	800	SKN 26/08	SKR 26/08
1200	1200	SKN 26/12	SKR 26/12
1400	1400	SKN 26/14	SKR 26/14
1600	1600	SKN 26/16	SKR 26/16







Symbol	Conditions	Values	Units
$I_{FAV}$	sin. 180; $T_c = 100$ °C	25	A
$I_D$	K 9; $T_a = 45$ °C; B2 / B6	20 / 29	A
	K 3; $T_a = 45$ °C; B2 / B6	35 / 50	A
$I_{FSM}$	$T_{vj} = 25$ °C; 10 ms	375	A
	$T_{vj} = 180$ °C; 10 ms	320	A
$i^2t$	$T_{vj} = 25$ °C; 8,3 ... 10 ms	700	A <sup>2</sup> s
	$T_{vj} = 180$ °C; 8,3 ... 10 ms	510	A <sup>2</sup> s
$V_F$	$T_{vj} = 25$ °C; $I_F = 60$ A	max. 1,55	V
$V_{(TO)}$	$T_{vj} = 180$ °C	max. 0,85	V
$r_T$	$T_{vj} = 180$ °C	max. 11	m $\Omega$
$I_{RD}$	$T_{vj} = 180$ °C; $V_{RD} = V_{RRM}$	max. 4	mA
$Q_{rr}$	$T_{vj} = 160$ °C; $-di_F/dt = 10$ A/ $\mu$ s	20	$\mu$ C
$R_{th(j-c)}$		2	K/W
$R_{th(c-s)}$		1	K/W
$T_{vj}$		- 40 ... + 180	°C
$T_{stg}$		- 55 ... + 180	°C
$V_{isol}$		-	V~
$M_s$	to heatsink	2,0	Nm
a		5 * 9,81	m/s <sup>2</sup>
m	approx.	7	g
Case		E 8	




SKN



SKR

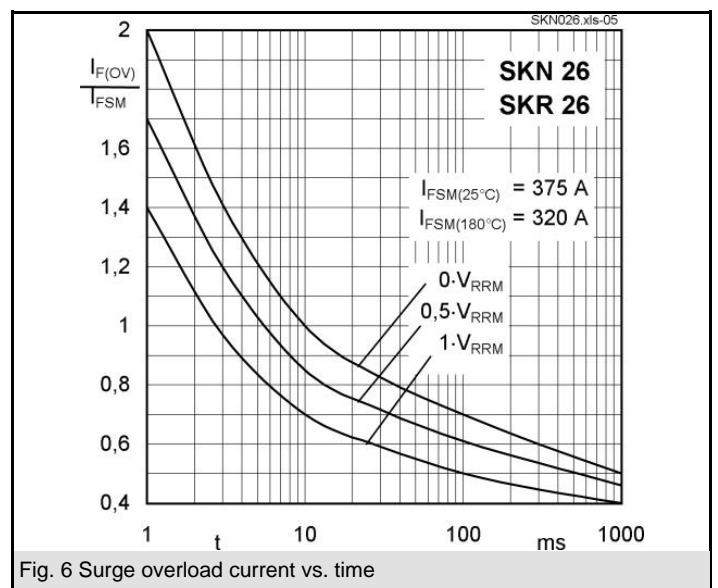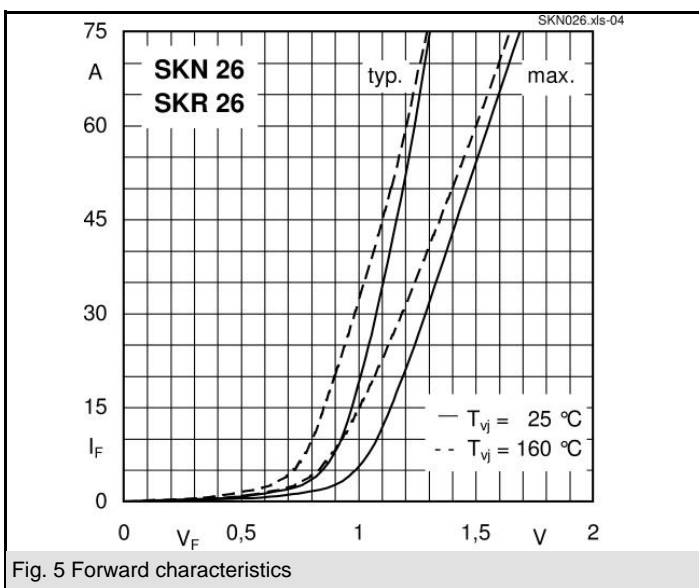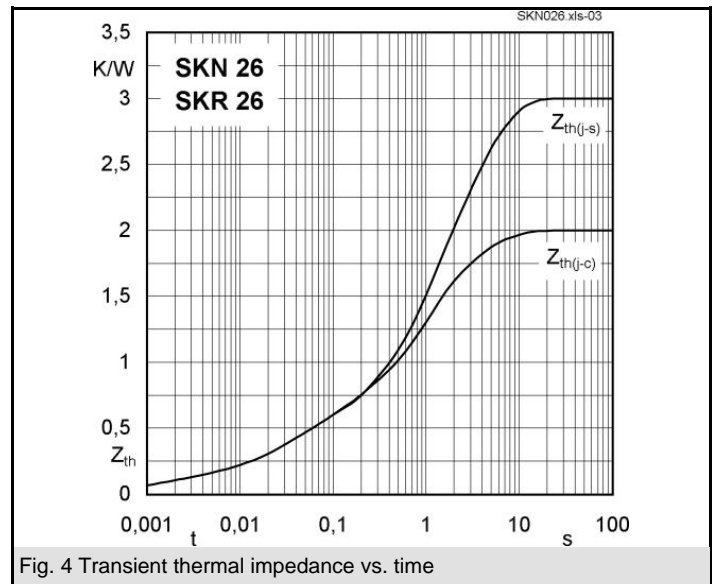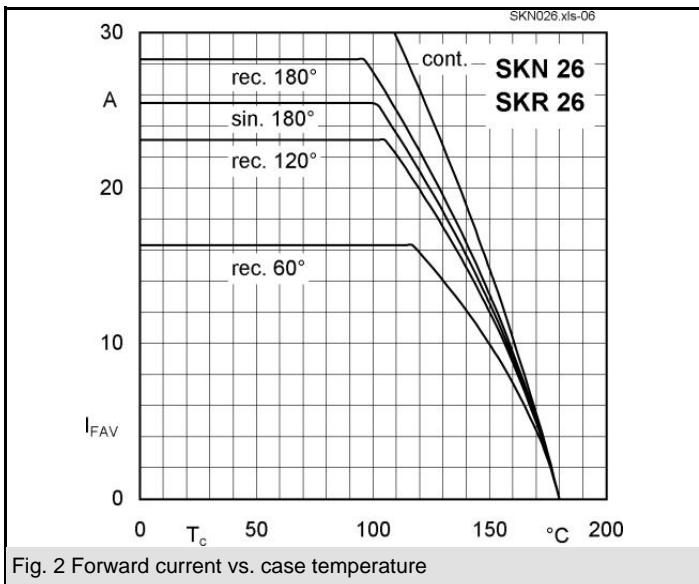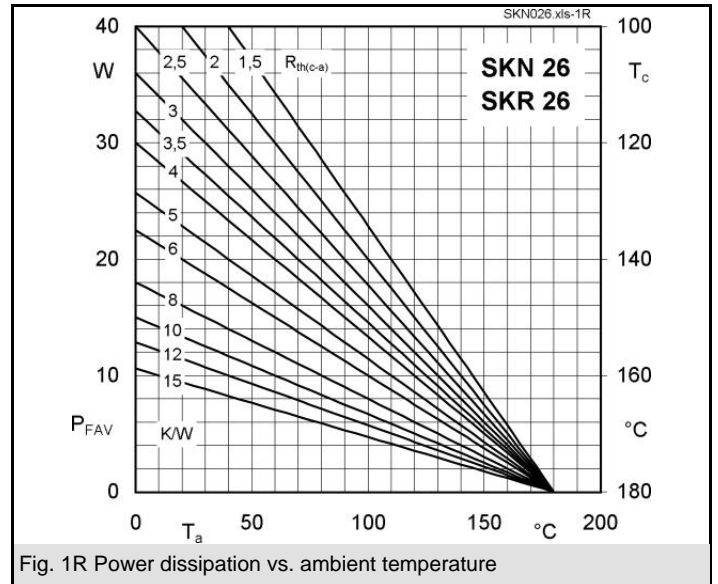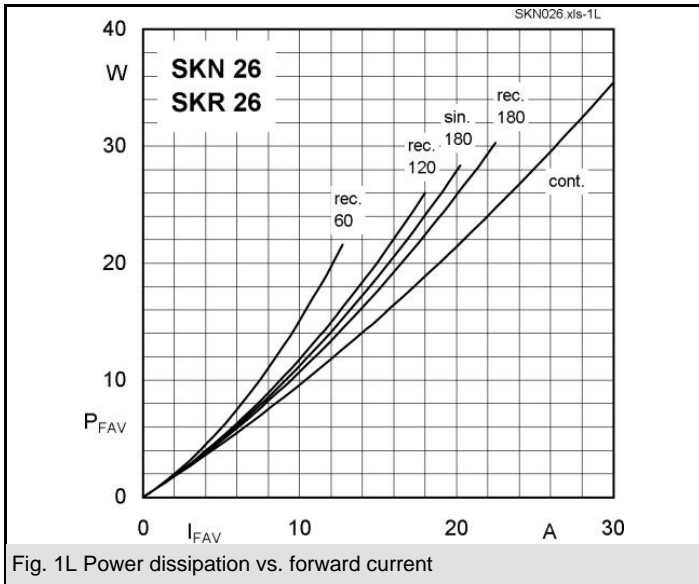

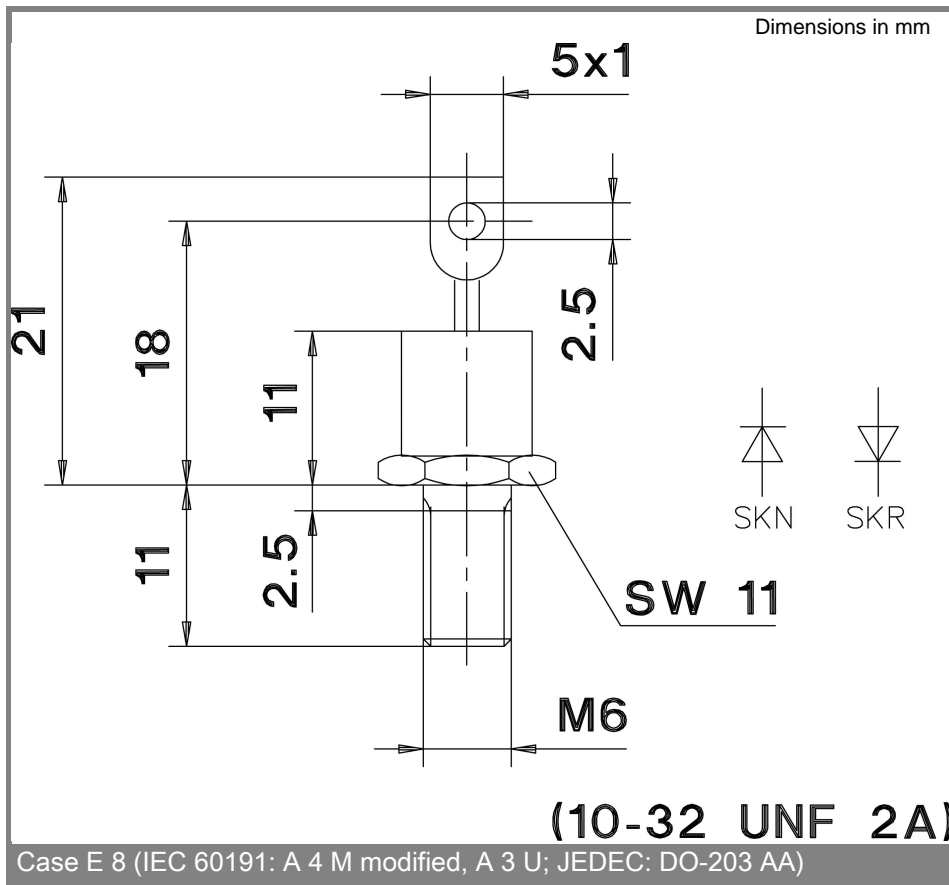

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Semikron](#) manufacturer:*

Other Similar products are found below :

[SKD 51/16](#) [SKKT 42B12 E](#) [SKKT 57/12E](#) [SKM 200GAR125D](#) [SKR 141F15](#) [SKB 60/08](#) [SKKH 122/16E](#) [SKYPER 32 R](#) [SKKD 260/16](#)  
[SKKL 92/16E](#) [SKD 31/08](#) [SKD 62/12](#) [SKKD 380/08](#) [SKKH 162/18E](#) [SKKH 72/20E H4](#) [SKKT 250/12E](#) [SKYPER 32 R UL](#) [SKN 100/12](#)  
[SKIIP 24AC12T4V1 M20](#) [SKIIP 39AC126V2 M20](#) [SKIIP 39ANB16V1 M20](#) [SKKH 570/16E](#) [SKD 30/04A1](#) [SKM 400GAL12E4](#) [SK 25 UT](#)  
[12](#) [SKR70/04](#) [SKD 30/16A1](#) [SKKT 42/08E](#) [SKBT 40/12](#) [SKCH 40/08](#) [SKD 110/08](#) [SKD 210/18](#) [SKD 82/08](#) [SKN 60F15](#) [SKR 60F12](#)  
[SKB 30/04A1](#) [SKR 100/12](#) [SKIIP 28ANB16V2 M20](#) [SKIIP 35NAB126V10 M20](#) [SKB 60/04](#) [SKB 60/12](#) [SKD 60/16](#) [SKDT 60/12](#) [SKKT](#)  
[106/18E](#) [SKR 130/14](#) [SKB 60/16](#) [SKCH 40/16](#) [SKKH 106/14E](#) [SKKT 106B12 E](#) [SKKT 570/16E](#)