

Type: Female connector straight with 2 rows

Termination: Press-fit, solder, THTR

Number of contacts: 32, 48, 64, 96

Pitch: 2.54 mm


Operational current: 1.5 A

Packaging: Tube

Standard: IEC 60603-2



Technical Specifications on page 36

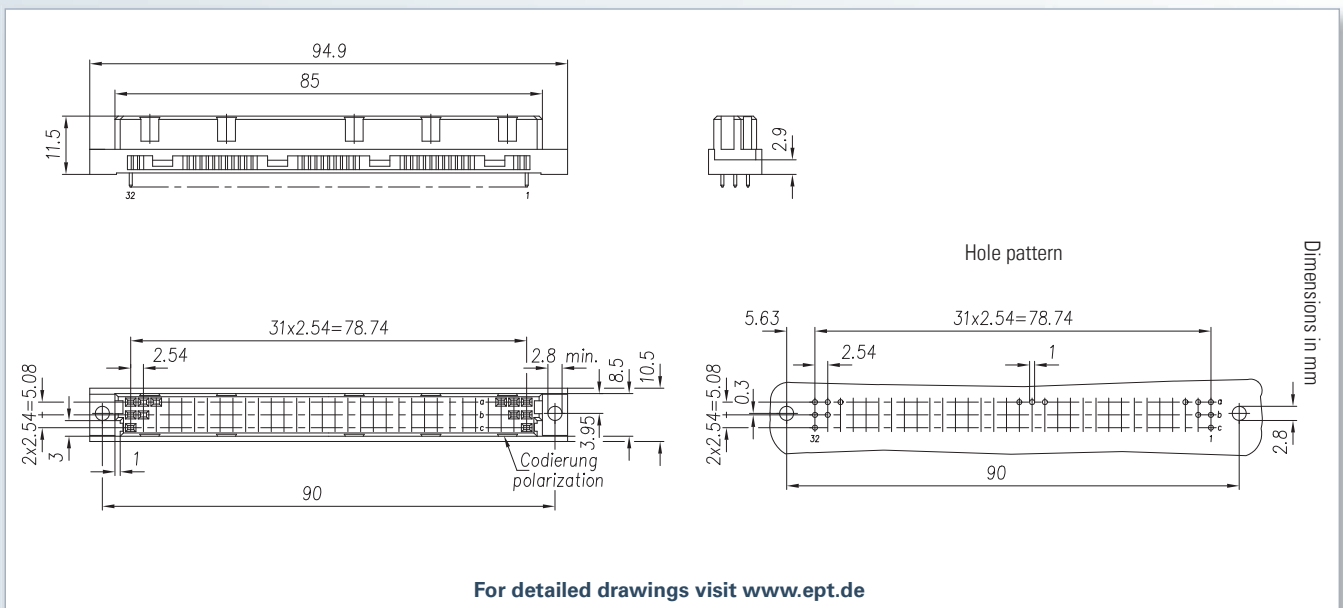

Accessories

- Processing tools p. 300
- Coding p. 132
- Shroud p. 123

Similar products

- Type C with switching function see on p. 124
- VMEx see on p. 120
- Type C in IDC see on p. 128






Mating connector / Application:

Type C Male connector (p. 52)

Type R Male connector (p. 74)



Press-fit - Performance level II






No. of contacts	Contact arrangement	PCB thickness	Termination length L 			
			3.2 mm	4.6 mm	13 mm	17 mm
			Part number			
32		1.5 - 2.0 mm	104-60014-01	-	104-65015-01	104-65016-01
		2.0 - 2.8 mm	-	104-60014-02	104-65015-02	104-65016-02
		> 2.8 mm	-	104-60014-03	104-65015-03	104-65016-03
48		1.5 - 2.0 mm	104-60044-01	-	104-65045-01	104-65046-01
		2.0 - 2.8 mm	-	104-60044-02	104-65045-02	104-65046-02
		> 2.8 mm	-	104-60044-03	104-65045-03	104-65046-03
64		> 1.5 mm	-	304-60054-02	304-65055-03	304-65056-04
96		> 1.5 mm	-	304-60064-02	304-65065-03	304-65066-04

On request

- contact arrangement
- without flange
- performance level I + III or customized
- special contact length
- alternative contact surface Sn e. g. for WireWrap
- PCB hole 0,85 mm see on p. 37



Solder - Performance level II




No. of contacts	Contact arrangement	Termination length L 				
		2.5 mm	3.4 mm	4.6 mm	13 mm	Solder lug
		Part number				
32		104-40014	-	-	104-40016	-
48		104-40044	-	-	104-40046	-
64		304-40054-05	304-40054-01	304-40054-02	304-40055-03	104-40115
96		304-40064-05	304-40064-01	304-40064-02	304-40065-03	104-40075

On request

- contact arrangement
- Board-Lock p. 131
- performance level I + III or customized
- special contact length



THTR - Performance level II

No. of contacts	Contact arrangement	Termination length L 		
		2.5 mm	3.4 mm	4.6 mm
		Part number		
64		304-40054-05TH	304-40054-01TH	304-40054-02TH
96		304-40064-05TH	304-40064-01TH	304-40064-02TH

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EPT manufacturer](#):

Other Similar products are found below :

[111-40064](#) [104-49054](#) [112-40065](#) [D2LS-A](#) [404-52040-51](#) [114-40050](#) [104-80075](#) [108-40064](#) [101-40064](#) [FS-IR12B](#) [102-90065](#) [243-11322-15](#) [104-40075](#) [FS-IR02B](#) [403-51040-51](#) [114-40090](#) [113-40010](#) [FS-IR82B](#) [962-40206-03](#) [243-23320-15](#) [FS-IR32D](#) [FS-IR42B-45025XH](#) [116-90064](#) [TS-IR05](#) [962-60326-12](#) [102-80065](#) [244-11000-15](#) [244-62300-15](#) [D1CS-D](#) [304-40064-01](#) [114-40040](#) [TS-IR03](#) [112-40064](#) [401-51501-51](#) [101-80014](#) [107-40064](#) [244-23300-15](#) [402-51501-51](#) [114-40080](#) [401-55501-51](#) [109-40064](#) [110-40584](#) [115-40074](#) [404-51050-51](#) [404-53032-51](#) [403-52012-51](#) [113-40060](#) [107-40065](#) [243-22310-15](#) [403-51050-51](#)