


# DIN 41612



## Type F Male Connector

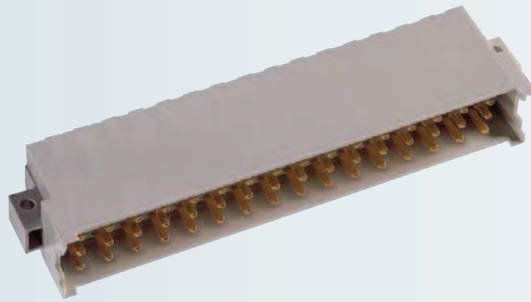

**Type:** Male connector 90° with 3 rows

**Termination:** Solder

**Number of contacts:** 32, 48

**Pitch:** 5.08 mm x 3.81 mm


**Operational current:** 5.6 A

**Packaging:** Box

**Standard:** IEC 60603-2



Technical Specifications on page 36

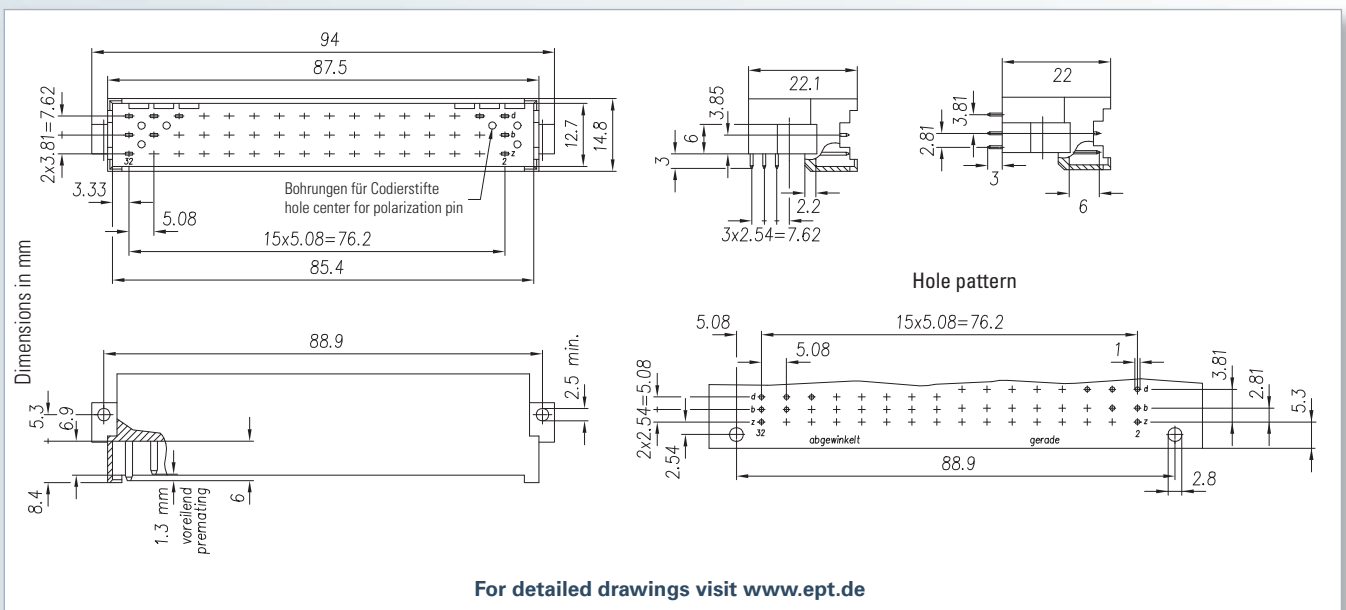

### Accessories

- Coding p. 132

### Mating connector / Application:



Type F Female connector (p. 96)



Type F low profile Female connector (p. 98)



**Solder - Performance level II** •••

No. of contacts	Contact arrangement	Termination length		
		L 3 mm 3 rows below	L 3 mm 3 rows sideways	L 3 mm 2 rows below
Artikelnummer				
32		-	109-40025	109-40024
32		109-40014	109-40015	-
48		109-40064	109-40065	-

**On request**

- performance level I + III or customized
- special contact length
- also in THTR
- Board-Lock p. 131
- contact arrangement

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EPT manufacturer](#):*

Other Similar products are found below :

[111-40064](#) [104-49054](#) [112-40065](#) [D2LS-A](#) [404-52040-51](#) [114-40050](#) [104-80075](#) [108-40064](#) [101-40064](#) [FS-IR12B](#) [102-90065](#) [243-11322-15](#) [104-40075](#) [FS-IR02B](#) [403-51040-51](#) [114-40090](#) [113-40010](#) [FS-IR82B](#) [962-40206-03](#) [243-23320-15](#) [FS-IR32D](#) [FS-IR42B-45025XH](#) [116-90064](#) [TS-IR05](#) [962-60326-12](#) [102-80065](#) [244-11000-15](#) [244-62300-15](#) [D1CS-D](#) [304-40064-01](#) [114-40040](#) [TS-IR03](#) [112-40064](#) [401-51501-51](#) [101-80014](#) [107-40064](#) [244-23300-15](#) [402-51501-51](#) [114-40080](#) [401-55501-51](#) [109-40064](#) [110-40584](#) [115-40074](#) [404-51050-51](#) [404-53032-51](#) [403-52012-51](#) [113-40060](#) [107-40065](#) [243-22310-15](#) [403-51050-51](#)