## Type C/3 Female Connector



Type: Female connector straight

with 3 rows

Termination: Press-fit, solder

Number of contacts: 20, 30

Pitch: 2.54 mm


Operational current: 1.5 A

Packaging: Tray

Standard: IEC 60603-2

RoHS COMPLIANT

Technical Specifications on page 36

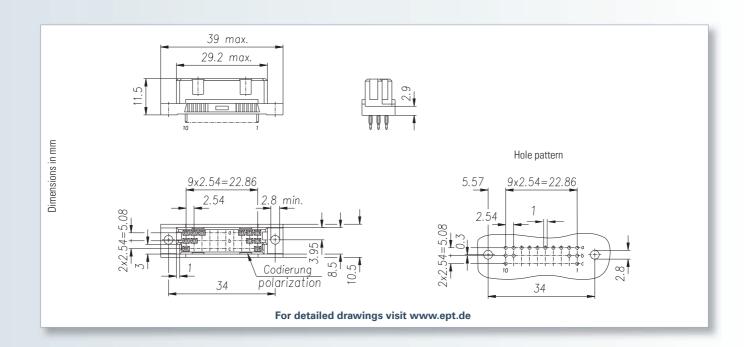

### **Accessories**

- Processing tools p. 300
- Coding p. 132

#### **Mating connector / Application:**



Type C/3 Male connector (p. 60)



Type R/3 Male connector (p. 82)

## Type C/3 Female Connector



#### Press-fit - Performance level II

		Termination length L					
No. of		4.6 mm	13 mm	17 mm			
contacts	Contact arrangement	Part number					
20	4 3 2 1	304-68004-02	304-78006-03	304-78106-04			
30	4 3 2 1	304-68014-02	304-78016-03	304-78116-04			

## On request

- performance level I + III or customized
- special contact length
- alternative contact surface Sn e. g. for WireWrap
- without flange
- contact arrangement



#### Solder - Performance level II

		Termination length L					
No. of		2.5 mm	3.4 mm	4.6 mm	13 mm	5.5 mm Manual soldering with solder lug	
contacts	Contact arrangement	Part number					
20		304-80014-05	304-80014-01	304-80014-02	304-80016-03	104-80035	
30	4 3 2 1	304-80064-05	304-80064-01	304-80064-02	304-80066-03	104-80075	

## On request

- performance level I + III or customized
- special contact length
- also in THTR
- Board-Lock p. 131
- contact arrangement



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EPT manufacturer:

Other Similar products are found below:

111-40064 104-49054 112-40065 D2LS-A 404-52040-51 114-40050 104-80075 108-40064 101-40064 FS-IR12B 102-90065 243-1132215 104-40075 FS-IR02B 403-51040-51 114-40090 113-40010 FS-IR82B 962-40206-03 243-23320-15 FS-IR32D FS-IR42B-45025XH
116-90064 TS-IR05 962-60326-12 102-80065 244-11000-15 244-62300-15 D1CS-D 304-40064-01 114-40040 TS-IR03 112-40064 40151501-51 101-80014 107-40064 244-23300-15 402-51501-51 114-40080 401-55501-51 109-40064 110-40584 115-40074 404-51050-51
404-53032-51 403-52012-51 113-40060 107-40065 243-22310-15 403-51050-51