


**Type:** Female connector straight  
**Termination:** Press-fit, solder  
**Number of contacts:** 40, 64  
**Pitch:** 2.54 mm  
**Operational current:** 1.9 A  
**Packaging:** Tray  
**Standard:** PC/104



Technical Specifications on page 166

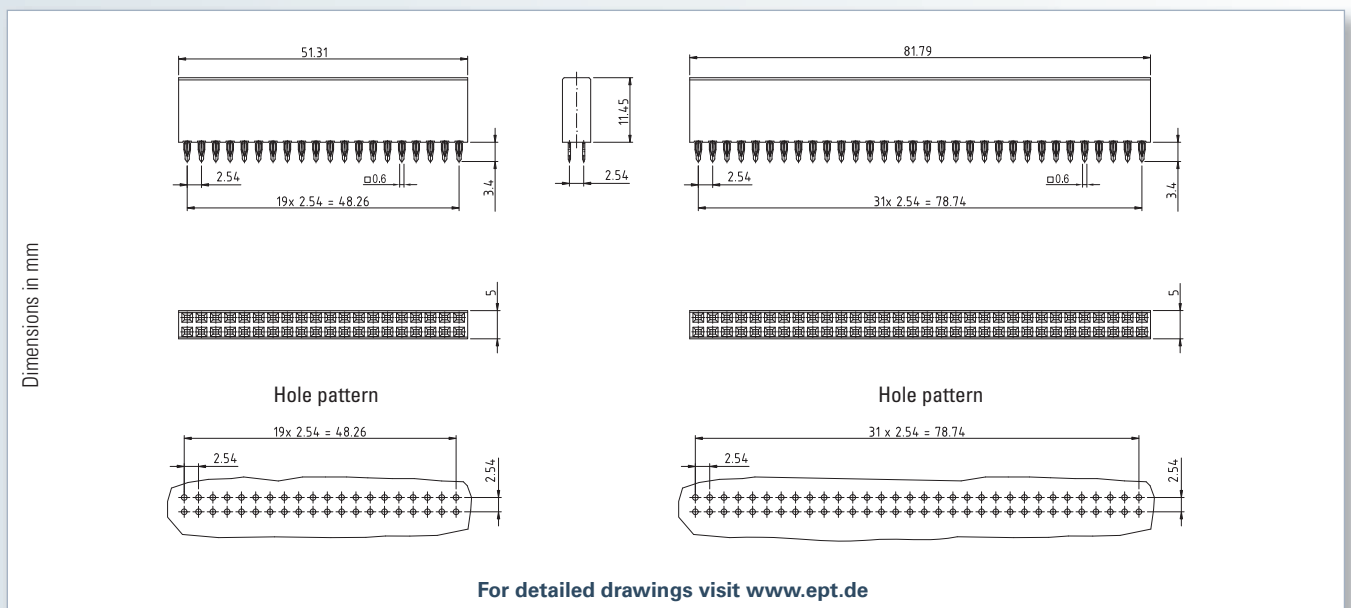

**Accessories**

- Processing tools p. 306

**Note**


At a contact length of 12.2 mm a guiding block is scope of delivery.

**Mating connector / Application:**

- PC/104 Female connector (p. 168)
- VarPol Straight pin header (p. 154)




**Press-fit** 

No. of contacts	Performance level	Termination length L 	
		3.4 mm	12.2 mm
		Part number	
40	II	962-60206-03	962-60206-12
40	III	962-60202-03	962-60202-12
64	II	962-60326-03	962-60326-12
64	III	962-60322-03	962-60322-12



**Solder** 

No. of contacts	Performance level	Termination length L 
		3.4 mm
		Part number
40	II	962-40206-03
40	III	962-40202-03
64	II	962-40326-03
64	III	962-40322-03

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EPT manufacturer](#):*

Other Similar products are found below :

[111-40064](#) [104-49054](#) [112-40065](#) [D2LS-A](#) [404-52040-51](#) [114-40050](#) [104-80075](#) [108-40064](#) [101-40064](#) [FS-IR12B](#) [102-90065](#) [243-11322-15](#) [104-40075](#) [FS-IR02B](#) [403-51040-51](#) [114-40090](#) [113-40010](#) [FS-IR82B](#) [962-40206-03](#) [243-23320-15](#) [FS-IR32D](#) [FS-IR42B-45025XH](#) [116-90064](#) [TS-IR05](#) [962-60326-12](#) [102-80065](#) [244-11000-15](#) [244-62300-15](#) [D1CS-D](#) [304-40064-01](#) [114-40040](#) [TS-IR03](#) [112-40064](#) [401-51501-51](#) [101-80014](#) [107-40064](#) [244-23300-15](#) [402-51501-51](#) [114-40080](#) [401-55501-51](#) [109-40064](#) [110-40584](#) [115-40074](#) [404-51050-51](#) [404-53032-51](#) [403-52012-51](#) [113-40060](#) [107-40065](#) [243-22310-15](#) [403-51050-51](#)