

# ETU-0800

8-Port Industrial Ethernet Switch

8\*10/100Tx, 12-48VDC Power Input




## Features

- 8-port 10/100Tx Fast Ethernet
- Redundant Power Input Design, 12-48VDC
- Built-in Relay Output Warning for Power Failure
- IP30 Rugged Metal Case Design
- DIN-Rail Mounting, Wall Mounting
- Operating Temperature Range, STD: -10°C ~ 65°C, EOT: -40°C ~ 75°C



## Dimensions (unit = mm)

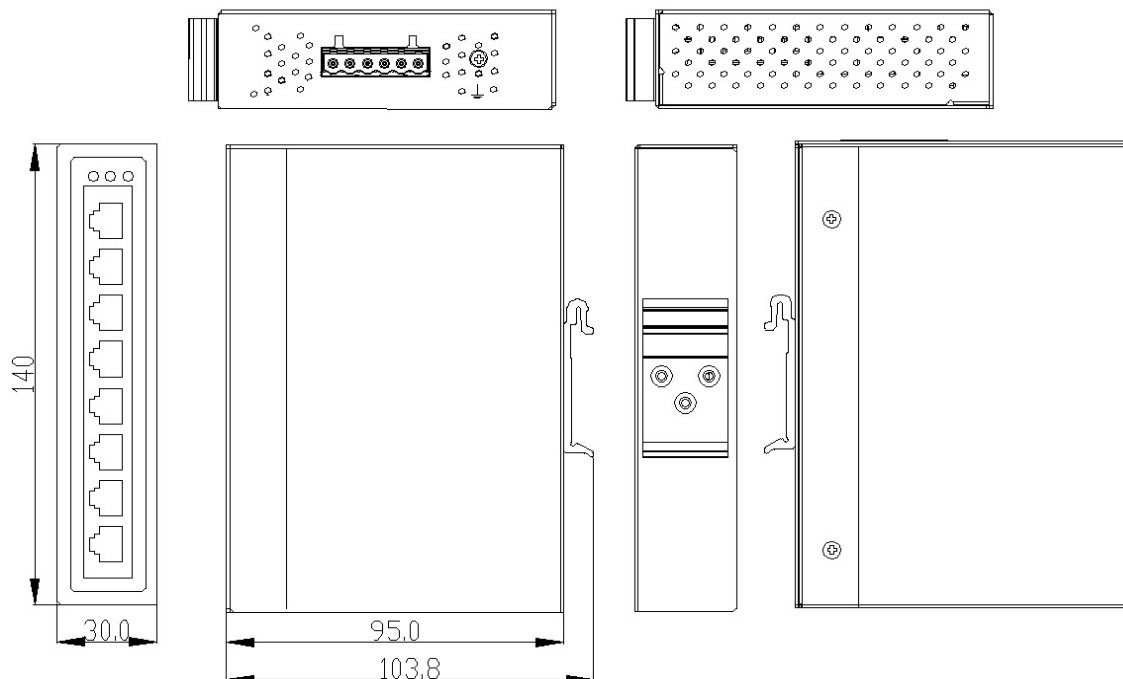

## Ordering Information

ETU-0800	8-Port Industrial Ethernet Switch 8*10/100Tx
ETU-0800-T	8-Port Industrial Ethernet Switch 8*10/100Tx, Extended Operating Temp.: -40° to 75° C
ETU-0800-CP	8-Port Industrial Ethernet Switch 8*10/100Tx, Corrosion Protection
ETU-0800-T-CP	8-Port Industrial Ethernet Switch 8*10/100Tx, EOT.: -40° to 75° C, Corrosion Protection

## Specifications

### Technology

Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x flow control, back pressure flow control

### Switch Properties

Switch Architecture	Back-Plane: Non-Blocking Switching Fabric
Transfer Rate	14,880pps for Ethernet Port, 148,800pps for Fast Ethernet Port
Memory Buffer	448K bits
MAC Table size	2K

### Interface

RJ45 Ports	8*10/100BaseT(X), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
LED Indicators	Power 1, Power 2, Fault Ethernet Ports: On-Link/Flash-data transmitting
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)

### Power Requirements

Input Voltage	12-48VDC, Redundant Input
Overload Current Protection	Present (Slow-Blow Fuse)
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Power Consumption	3.5Watts

### Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions	30 x 142 x 99 mm (W x H x D)
Weight	Unit Weight: 0.45kg, Shipping Weight: 0.65kg
Mounting	DIN-Rail Mounting, Wall Mounting

### Environmental Limits

Operating Temperature	STD: -10°C ~ 65°C (14°F ~ 149°F); EOT: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)

### Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
EMS	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Corrosion Protection	IEC 60068-2-11, IEC 60068-2-52, IEC 60068-2-60 IPC-CC-830B, MIL-I-46058C, IEC 61086-2 (Class 2), UL 94, UL 746E ISO 9223 (Class C5-Very High, Class CX-Extreme) ANSI/ISA 71.04 (Class GX-Severe)
Compliance	NEMA TS2 (ITS) – EoT version
Warranty	5 Years

Due to continuous improvement, all product specifications are subject to change without further notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [COMPARTA](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)