

1200A 3-Phase Power Analyzer/Datalogger

Saves data on an SD card in Excel® format

For easy transfer to a PC for analysis

Features:


- Large dot-matrix, sun-readable, numerical, backlit LCD
- Full system analysis with up to 35 parameters
 - V (phase-to-phase), V (phase-to-ground)
 - A (phase-to-ground)
 - KW / KVA / KVAR / PF (phase)
 - KW / KVA / KVAR / PF (system)
 - KWH / KVAH / KVARH / PFH (system)
 - Phase angle
- High accuracy autoranging current clamps (0.2A to 1200A)
- 600.0VAC input with CAT III-600V safety rating
- Adjustable Current Transformer (CT) and Potential Transformer (PT) ratio for high power distribution systems
- Log up to 30,000 readings on a removable SD memory card in Microsoft Excel® format
- Wide sampling rate range (2 seconds to 2 hours)
- Captured measurements can be imported directly into Excel via the SD memory card
- Easy-to-use onscreen menu
- Easy-to-grab rugged over molded housing

Applications:


- AC Power Quality Evaluation
- Motor/Generator Installation
- Energy Audits



Complete with 3 current clamps, 4 voltage leads with alligator clips, 8 AA batteries, SD memory card, Universal AC adaptor (100 to 240V), and case

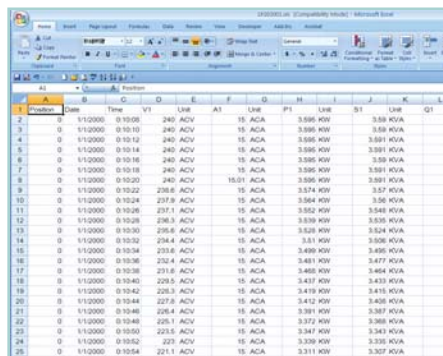

Transfer data from meter to PC using Excel® software and datalogged readings from the SD memory card (included)



Backlit LCD displays numerical values



SD memory card included

Specifications	Range	Basic Accuracy
ACV (True rms)	600.0V	±(0.5%rdg+0.5V)
ACA	1200A	±(0.5%rdg+0.5A)
Active Power (MW)	9.999MW	±(1.0%rdg+0.08KW)
Apparent Power (MVA)	9.999MVA	±(1.0%rdg+0.08KVA)
Reactive Power (MVAR)	9.999MVAR	±(1.0%rdg+0.08KVAR)
Power Factor	0.00 to 1.00	±0.04
Frequency Range	45Hz to 65Hz	±0.1Hz
Phase	-180° to +180.0°	±1°
Active Power Energy (MWh)	0.0kWh to 9.999MWh	±(2.0%rdg+0.08KWh)
Apparent Power Energy (MVAh)	0.0KVAh to 9.999MVAh	±(2.0%rdg+0.08KVAh)
Reactive Power Energy (MVARh)	0.0KVARh to 9.999MVARh	±(2.0%rdg+0.08KVARh)
Datalogging	60,000 readings (2GB SD memory Card)	
CE/CAT rating	CE/CAT III-600V	
Dimensions	8.9 x 2.5 x 1.3" (225 x 125 x 64mm)	
Weight	Meter: 2.3lbs (1049g); Clamp: 1.2lbs (522g)	

Ordering Information:

- 382100.....1200A 3-Phase Power Analyzer/Datalogger
- 382000.....Voltage Test Leads with Alligator Clips (4 leads)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Clamp Multimeters & Accessories](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[I800](#) [FLUKE 1630-2](#) [ZAPDUMOD-03](#) [ZARKMS-01-99](#) [UT233](#) [TESTO 770-3](#) [0590 7703](#) [AX-3550](#) [AX-M266C](#) [BM079](#) [BM089](#) [BM157](#)
[BM162](#) [BM197](#) [KEW2210R](#) [FLUKE 80I-110S](#) [FLUKE I200](#) [FLUKE I200S](#) [FLUKE I3000FLEX-24](#) [FLUKE I310S](#) [FLUKE I400](#) [CIE600](#)
[TESTO 770-2](#) [0590 7702](#) [34194A](#) [KEW2433R](#) [KEW8112](#) [FLUKE 772](#) [380976-K](#) [MA3110](#) [MA440](#) [MA443](#) [MA445](#) [FLUKE-374 FC](#)
[TA74](#) [AMP-320](#) [CM55](#) [CM46](#) [I200](#) [ACD-6 PRO](#) [FLUKE-1630-2FC](#) [I410](#) [CM44](#) [CM42](#) [FLK-A3000 FC](#) [FLUKE-376 FC](#) [ACD-14-PRO](#)
[MA610](#) [F201](#) [F205](#) [MA193 \(250 MM\)](#) [DIGIFLEX 4000A 350MM](#)