




Heavy Duty RTD Thermometer

Precision measurements over a wide Temperature range

With selectable 0.1° or 0.01° resolution

Features:

- Wide °F/°C measurements from -199.99 to 1562.0°F (-199.99 to 850.0° C)
- Selectable 0.1° or 0.01° display resolution
- Large 0.5" (13mm) 4-1/2 digit (20,000 count) LCD display
- Accurate to ±(0.1% reading + 0.4°) under 200°F and ±(0.1% reading + 1.0°) over 200°F
- Built-in linearity correction with fast response
- · Sampling time of 0.4 second
- · Data Hold to freeze the displayed value
- Built-in RS-232 PC serial interface with optional Data Acquisition software
- Accepts proprietary 4-wire Pt-100Ω RTD probes with ±[0.3 + (0.005 x measured temperature)°C accuracy
- Dimensions: 7.1 x 2.8 x 1.3" (180 x 72 x 32mm)
 Weight: 10oz (285g)
- Complete with protective rubber holster and 9V battery
- Probes are sold separately

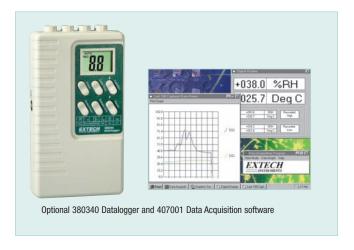



Ordering Information:

407907	Heavy Duty RTD Thermometer
407907-NIST	407907 w/ NIST Certificate
850187	RTD General Purpose Probe, -40° to 500°C
850186	RTD Stainless Steel Surface Probe40° to 250°C
850189	RTD Stainless Steel Air Probe40° to 500°C
156119	117V AC Adaptor
407001	Data Acquisition software program and cable
	Hard vinyl carrying case

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Environmental Test Equipment category:

Click to view products by Extech manufacturer:

Other Similar products are found below:

CW40 F150C10E3DRT F150LTC20 F150CD10E2 F150L75 F150LRS S-11 FLUKE-LDG 382153 FM100 RH210 382253 MO290-P

GEO-CABLE-REEL-50M T197914 RD300-L IR11BD IR11GM IR12GM IR21BD IR31CE IR32BC IR33BC MP7217TC NGM-1 SGX
7NH3 UT381 F150-SLC50 AW-CO-1000 AW-NmHc-100 3.000.401 AX-7535 CS-9S6SS-A P 2800 A P 2801 P 2802 P 5039 P 5130 P

5055 P 5060 P 5065 P 5086 P 5090 P 5110 P 5115 P 5135 P 5140 P 5145 P 5150 P 5160