


Foot-switch

Series F1

Description F1-Al4-20mA

Article number 6161500726

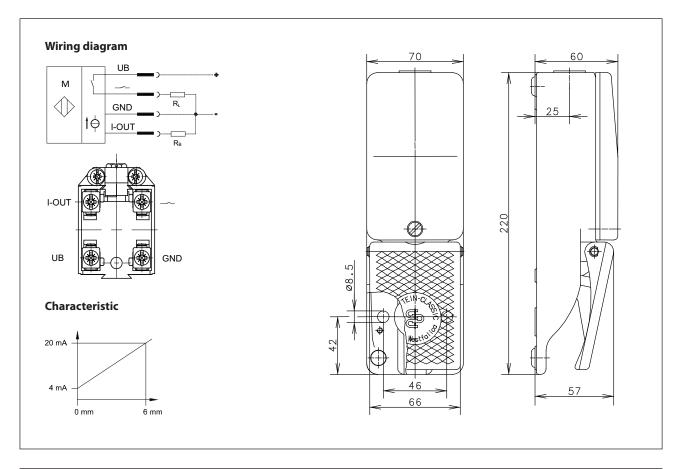

Electrical data		
Rated operational voltage	U _e	12-26 V DC
Utilization category		DC-13 U _B 12-26 DC / 0,2 A acc. to IEC/EN 60947-5-2
Current output		4-20 mA
Short-circuit protection type switching element		permanently short-circuit and overload protected, clocking
Protection class		III (safety extra-low voltage)

Technical Data



Mechanical data	
Enclosure	AL, die-cast
Cover	AL, die-cast
Actuator	Foot lever (PA)
Ambient air temperature	-30° C +80° C
Contact type	PNP N.O., teachbar 0,1-5,9 mm
Operating force	\approx 10 N (pedal centre)
Mechanical life	10 x 10 ⁶ operating cycles
Switching frequency	max. 50 / min
Assembly	2 x M8
Connection	screw terminals (M3,5)
Number of connections	8
Conductor cross-sections	Solid: 0,5 1,5 mm ² or Litz wire with ferrules: 0,5 1,5 mm ²
Cable entrance	1 x M20 x 1,5
Weight	≈ 1,5 kg
Protection type	IP65 acc. to IEC/EN 60529

Standards	
EN 60947-5	i-7

EU Conformity 1)		
	acc. to directive 2014/30/EU (EMC-Directive)	

Notes

The degree of protection specified (IP code) applies only to a properly closed cover and the use of an equivalent cable gland with adequate cable.

¹⁾To be conform with the EMV guideline (2014/30/EU) a shielded connection cable has to be used.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Control Switches category:

Click to view products by Bernstein manufacturer:

Other Similar products are found below:

80887-99 80932-99 86855-00 88814-30 89721-12 89804-08 EX0011-1 SSN RL01801 50051857-17 50099156-001-05 51.155R-15200 50058920-26 KMK-PA RAL9005 M16 ACCU-SC/L-3000 PORTAPRO CFPS-73-48M WEL.PT-O6 WEL.PT-L8 WEL.PT-K7 WEL.PT-H7 WEL.PT-E9 WEL.PT-B7 WEL.PT-AA9 WEL.PT-AA8 WEL.PT-A8 WEL.LT-F WEL.LT-4 WEL.LT-1LX WEL.LT-1L WEL.ET-BB WEL.CT5B7 WEL.51361699 RGFRA1903041A1T PLC-60/75 PLC-30/40 PLC-24/30 PLC-40/55 LOC-MIKSER2 8522808 CC-100N V8Y-11Z-Y V8Y-11Z-R V8Y-11Z-O V8Y-11Z-24R V8Y-11Z-24O V8Y-11Z-230B V8Y-11-230W V8Y-11-230O