



Multitite FCE-PU-V0 black:
Flexible, extra robust, halogen free
low smoke, wide temperature range
and extra chemical resistant.

Type FCE-PU-V0 is particularly used for applications where medium to heavy mechanical protection is needed in combination with flexibility movements at higher and lower temperatures with an halogen-free cover, like in the subway-, train- and bus-building industry. The IP68 fittings provide the excellent liquid-tightness which is needed for "rolling stock". Type FCE-PU-V0 is also used in situations where a better chemical resistance is required.

Material & Construction:

Construction: Galvanised steel core, square-locked with thin wall convoluted thermoplastic (PU compound) cover. Type FCE-PU-V0 is made out of thicker and higher performance strip gauge compared with FCD.

Cover specifications: Polyurethane (V0 acc. UL94), halogen-free, lead-free according to RoHS, oil, sunlight and UV resistant.



Special approvals, flame properties according to:

- EN 45545:
 R22 (interior equipment) class HL1 and HL2
 R23 (exterior equipment) class HL1 and HL2.
 (ITCpnl = 0,15 , Ds max = 239,8 and LOI = 30,5).

Temperature: -50°C to +105°C, intermittent up to +125°C.

Colour: Black.

Classification according NEN-EN-IEC 61386:

Compression resistance: Class 4, Heavy (1250 N).

Impact resistance: Class 4, Heavy (6 J).

Tensile strength: Class 4, Heavy (1000 N).

Protection class: IP 67 (dust-proof, water-tight).



FCEPUVO	Diametre		Bending radius (CL)		Small reel		Standard reel		Large reel		Weight (Kg/m)
	Size DN	Inside (mm)	Outside (mm)	Static (mm)	Dynamic (mm)	Metre	Article No.	Metre	Article No.	Metre	Article No.
10	7,0	10,0	30	40	-	-	-	-	-	-	0,10
12	10,0	14,0	37	50	-	-	25	374.012.2	-	-	0,18
16	13,0	17,0	45	60	-	-	25	374.016.2	-	-	0,23
18	-	-	-	-	-	-	-	-	-	-	-
20	17,0	21,5	55	80	-	-	25	374.020.2	-	-	0,30
25	21,2	26,0	70	100	-	-	25	374.025.2	-	-	0,39
32	28,1	34,0	95	125	-	-	25	374.032.2	-	-	0,52
40	37,7	45,0	115	160	10	374.040.1	-	-	-	-	0,75
50	48,4	56,0	135	190	10	374.050.1	-	-	-	-	1,10

* Special reel quantities on request.

The fittings for Multitite FCE-PU-V0 are outlined on pages 2-07 till 2-15.



Size Multitite	DN	10	12	16	18	20	25	32	40	50	-	-	-
Fittings	ISO	M10 / M12	M12 / M16	M16 / M20	M20	M20	M25	M32	M40	M50 / M63	-	-	-
	PG	7	9	11 / 13,5	13,5	16	21	29	36	48	-	-	-
	NPT	-	-	1/2"	-	1/2"	3/4"	1"	-	-	-	-	-

ANAconda
MULTITITE

CONDUIT
TYPE FCE-PU-V0
BLACK

ANACONDA MULTITITE

FITTINGS FOR MULTITITE IP 54



Anaconda IP 54 nickel plated brass fittings for Multitite FCD and FCE.

These nickel plated brass Anaconda fittings are standard fittings which can be used with Anaconda Multitite type FCD and FCE. The 2-piece Anaconda fittings are universal fittings and offer great corrosion protection in combination with a slim appearance.



Material & Construction:


Construction: Nickel plated brass fitting, consisting of 2 parts (body and cap).

Material: Body and cap are nickel plated brass.

Temperature: -55 °C till +260 °C continuous.


Protection class: IP 54.

Colour: Metal.

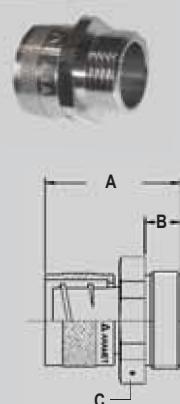

ISO straight fitting, fixed, male, nickel plated brass.


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M10 x 1,0	10	5,5	24	8	14	-	-	10	260.110.0	1,3
M12 x 1,5	10	5,5	24	8	14	-	-	10	260.111.0	1,4
M12 x 1,5	12	8,5	26	10	18	-	-	10	260.112.0	1,8
M16 x 1,5	12	8,5	26	10	18	-	-	10	260.115.0	2,0
M16 x 1,5	16	11,2	27	10	20	-	-	10	260.116.0	2,3
M20 x 1,5	16	11,2	27	10	22	-	-	10	260.117.0	2,6
M20 x 1,5	18	13,2	27	10	24	-	-	10	260.118.0	2,7
M20 x 1,5	20	15,2	27	10	24	-	-	10	260.120.0	3,0
M25 x 1,5	25	19,2	32	12	30	-	-	5	260.125.0	5,4
M32 x 1,5	32	25,9	35	13	38	-	-	5	260.132.0	8,1
M40 x 1,5	40	34,8	41	14	48	-	-	2	260.140.0	15,0
M50 x 1,5	50	44,8	45	15	60	-	-	2	260.150.0	22,4
M63 x 1,5	50	44,8	46	16	70	-	-	2	260.160.0	28,6

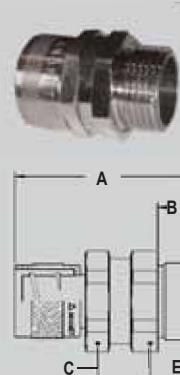


ISO straight fitting, swivel, male, nickel plated brass.

Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M10 x 1,0	10	5,5	30	8	14	-	14	10	261.110.0	1,7
M12 x 1,5	10	5,5	30	8	14	-	14	10	261.111.0	1,9
M12 x 1,5	12	8,5	34	10	18	-	18	10	261.112.0	2,4
M16 x 1,5	12	8,5	34	10	18	-	18	10	261.115.0	3,1
M16 x 1,5	16	11,2	36	10	20	-	20	10	261.116.0	3,9
M20 x 1,5	16	11,2	36	10	20	-	22	10	261.117.0	4,2
M20 x 1,5	18	13,2	37	10	24	-	24	10	261.118.0	4,4
M20 x 1,5	20	15,2	37	10	24	-	24	10	261.120.0	4,9
M25 x 1,5	25	19,2	43	12	30	-	30	5	261.125.0	8,8
M32 x 1,5	32	25,9	47	13	38	-	38	5	261.132.0	13,3
M40 x 1,5	40	34,8	56	14	48	-	48	2	261.140.0	25,1
M50 x 1,5	50	44,8	60	15	60	-	60	2	261.150.0	36,7
M63 x 1,5	50	44,8	61	16	60	-	70	2	261.160.0	47,1

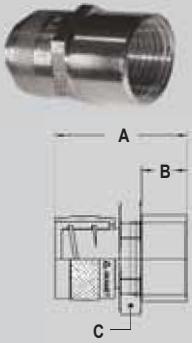


ISO straight fitting, fixed, female, nickel plated brass.


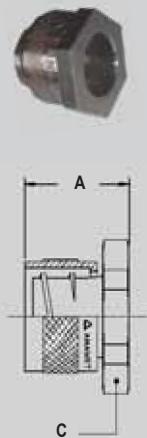
Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	16	11,2	29	13	20	-	-	10	260.316.0	2,4
M20 x 1,5	16	11,2	30	13	24	-	-	10	260.317.0	3,0
M20 x 1,5	20	15,2	30	13	24	-	-	10	260.320.0	3,2
M25 x 1,5	25	19,2	34	15	30	-	-	5	260.325.0	5,9
M32 x 1,5	32	25,9	39	16	38	-	-	5	260.332.0	8,5
M40 x 1,5	40	34,8	43	16	48	-	-	2	260.340.0	16,6
M50 x 1,5	50	44,8	47	17	60	-	-	2	260.350.0	24,5

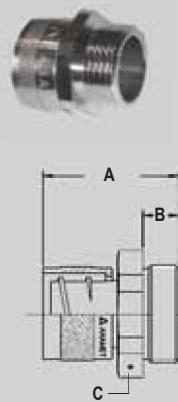Pg straight fitting, fixed, male, nickel plated brass.


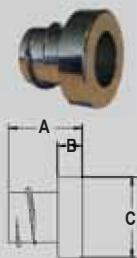
Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 7	10	5,5	24	8	14	-	-	10	260.207.0	1,3
Pg 9	12	8,5	26	10	18	-	-	10	260.209.0	1,9
Pg 11	16	11,2	27	10	20	-	-	10	260.211.0	2,4
Pg 13,5	18	13,2	27	10	24	-	-	10	260.213.0	3,0
Pg 16	20	15,2	27	10	24	-	-	10	260.216.0	3,2
Pg 21	25	19,2	32	12	30	-	-	5	260.221.0	5,5
Pg 29	32	25,9	35	13	38	-	-	5	260.229.0	8,9
Pg 36	40	34,8	41	14	50	-	-	2	260.236.0	19,0
Pg 48	50	44,8	45	16	65	-	-	2	260.248.0	25,3

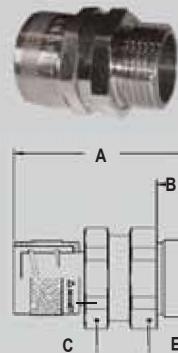**ANACONDA
MULTITITE**
**FITTINGS FOR
MULTITITE
IP 54**
Pg straight fitting, swivel, male, nickel plated brass.


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 7	10	5,5	30	8	14	-	14	10	261.207.0	1,8
Pg 9	12	8,5	34	10	18	-	18	10	261.209.0	3,0
Pg 11	16	11,2	36	10	20	-	20	10	261.211.0	4,0
Pg 13,5	18	13,2	36	10	24	-	24	10	261.213.0	4,6
Pg 16	20	15,2	37	10	24	-	24	10	261.216.0	5,2
Pg 21	25	19,2	43	12	30	-	30	5	261.221.0	9,2
Pg 29	32	25,9	47	13	38	-	40	5	261.229.0	14,6
Pg 36	40	34,8	56	14	48	-	50	2	261.236.0	27,3
Pg 48	50	44,8	61	16	60	-	65	2	261.248.0	43,8

Box connector, fixed, nickel plated brass.


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	10	5,5	16	-	14	-	-	10	262.210.0	1,0
-	12	8,5	16	-	18	-	-	10	262.212.0	1,4
-	16	11,2	17	-	20	-	-	10	262.216.0	1,7
-	18	13,2	17	-	24	-	-	10	262.218.0	2,1
-	20	15,2	17	-	24	-	-	10	262.220.0	2,5
-	25	19,2	20	-	30	-	-	5	262.225.0	4,0
-	32	25,9	22	-	38	-	-	5	262.232.0	6,1
-	40	34,8	27	-	48	-	-	2	262.240.0	11,6
-	50	44,8	30	-	60	-	-	2	260.250.0	18,0

**ANACONDA
MULTITITE**
**FITTINGS FOR
MULTITITE
IP 54**

End cap, nickel plated brass.

Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	10	5,5	18	6	13	-	-	10	264.110.0	0,4
-	12	8,5	18	6	17	-	-	10	264.112.0	0,4
-	16	11,2	18	6	20	-	-	10	264.116.0	0,8
-	18	12,6	19	6	22	-	-	10	264.118.0	1,0
-	20	15,2	19	6	24	-	-	10	264.120.0	1,2
-	25	19,2	21	7	30	-	-	5	264.125.0	1,8
-	32	25,9	22	8	38	-	-	5	264.132.0	2,9
-	40	34,8	24	8	49	-	-	2	264.140.0	5,2
-	50	44,8	25	8	60	-	-	2	264.150.0	7,6


90° elbow, ISO, inside / outside thread, nickel plated brass.

Outside Thread	Inside Thread	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	M16 x 1,5	-	26	10	-	24	22	10	783.016.0	6,0
M20 x 1,5	M20 x 1,5	-	26	10	-	25	24	10	783.020.0	10,0
M25 x 1,5	M25 x 1,5	-	32	10	-	34	33	5	783.025.0	16,0
M32 x 1,5	M32 x 1,5	-	40	12	-	40	42	5	783.032.0	26,0



Anaconda IP 65 nickel plated brass fittings for FCD & FCE.

The nickel plated brass Anaconda IP 65 fittings can be used with Anaconda FCD and FCE conduits. This Anaconda fitting offers besides a good corrosion protection also a higher degree of protection, IP 65, and a nice appearance. Because the design is universal up to 1", all types of Anaconda fittings are possible in this range.



Material & Construction:

Construction: Nickel plated brass fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).


Material: Counter nut and body are nickel plated brass. Ferrule is from passivated brass and clampingring is from PA6.

Temperature: -45 °C till +105 °C continuous, (cable-hose-fittings are -40 °C till +100 °C).

Protection class: IP 65.

Colour: Metal.

**ANACONDA
MULTITITE**

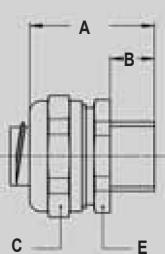


ISO straight fitting, compact, male, nickel plated brass (including connection set)



Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	12	8,3	30	10	26	-	24	10	712.015.4	4,2
M20 x 1,5	12	8,3	30	10	26	-	24	10	712.014.4	4,4
M16 x 1,5	16	11,2	30	10	26	-	24	10	712.016.4	4,2
M20 x 1,5	16	11,2	30	10	26	-	24	10	712.017.4	4,4
M20 x 1,5	20	15,2	32	10	29	-	27	10	712.020.4	5,0
M25 x 1,5	25	19,2	33	10	35	-	33	5	712.025.4	7,4
M32 x 1,5	32	25,9	36	12	45	-	44	5	712.032.4	13,9

**LIQUID-TIGHT
FITTINGS FOR
MULTITITE**

IP 65





ISO 90° fitting, compact, male, nickel plated brass (including connection set)



Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	12	8,3	26	10	26	31	22	10	712.915.4	7,0
M20 x 1,5	12	8,3	26	10	26	32	24	10	712.914.4	7,2
M16 x 1,5	16	11,2	26	10	26	31	22	10	712.916.4	7,0
M20 x 1,5	16	11,2	26	10	26	32	24	10	712.917.4	7,2
M20 x 1,5	20	15,2	28	10	29	34	27	10	712.920.4	8,4
M25 x 1,5	25	19,2	32	10	35	40	33	5	712.925.4	17,5
M32 x 1,5	32	25,9	40	12	45	49	42	5	712.932.4	29,4

**ISO straight swivel fitting, male, nickel plated brass
(including connection set)**

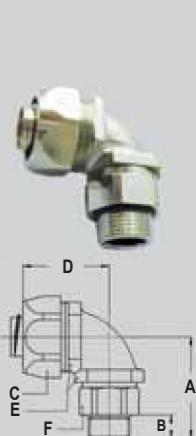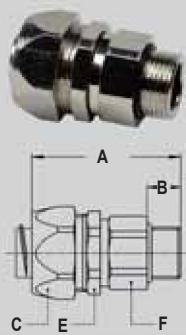


**ISO 90° swivel fitting, male, nickel plated brass
(including connection set)**





Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm						Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F				
M16 x 1,5	12	8,3	48	10	26	24	21	10	813.015.4	8,1	
M16 x 1,5	16	10,7	48	10	26	24	21	10	813.016.4	8,1	
M20 x 1,5	20	13,9	49	10	29	27	25	10	813.020.4	10,2	
M25 x 1,5	25	17,4	49	10	35	33	31	5	813.025.4	13,8	
M32 x 1,5	32	23,4	55	12	45	42	38	5	813.032.4	32,5	

**ISO cable-hose fitting, male, nickel plated brass
(including connection set).**

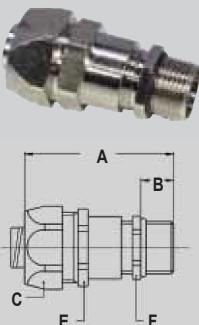


Thread	FCD / FCE	Clamping Range (mm)	Dimensions in mm						Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F				
M16 x 1,5	16	3 - 10	64	12	26	24	20	10	812.716.4	8,2	
M20 x 1,5	16	6 - 11	57	12	26	24	22	10	812.717.4	9,5	
M20 x 1,5	20	7 - 14	64	12	29	27	24	10	812.720.4	10,2	
M25 x 1,5	20	10 - 14	62	12	29	27	27	10	812.722.4	11,7	
M25 x 1,5	25	9 - 18	77	15	35	33	30	5	812.725.4	17,0	
M32 x 1,5	25	13 - 18	70	15	35	33	34	5	812.728.4	19,6	
M32 x 1,5	32	13 - 25	88	15	45	43	40	5	812.732.4	31,0	

**Pg straight fitting, compact, male, nickel plated brass
(including connection set)**

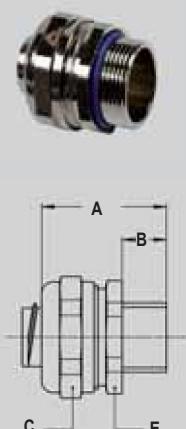


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg 11	16	11,2	30	10	26	-	24	10	710.011.4	4,2
Pg 13,5	16	11,2	30	10	26	-	24	10	710.013.4	4,4
Pg 16	20	15,2	32	10	29	-	27	10	710.016.4	5,0
Pg 21	25	19,2	33	10	35	-	33	5	710.021.4	7,4
Pg 29	32	25,9	36	12	45	-	44	5	710.029.4	13,9

**Pg 90° fitting, compact, male, nickel plated brass
(including connection set)**

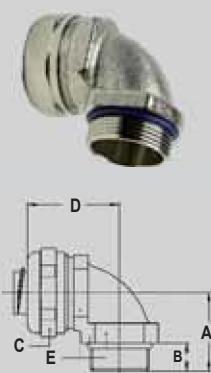


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg	Size (DN)									
Pg 11	16	11,2	26	10	26	32	24	10	710.911.4	7,0
Pg 13,5	16	11,2	26	10	26	32	24	10	710.913.4	7,2
Pg 16	20	15,2	28	10	29	34	27	10	710.916.4	8,4
Pg 21	25	19,2	32	10	35	40	33	5	710.921.4	17,5
Pg 29	32	25,9	40	12	45	49	42	5	710.929.4	29,4

**NPT straight fitting, compact, male, nickel plated brass
(including connection set)**

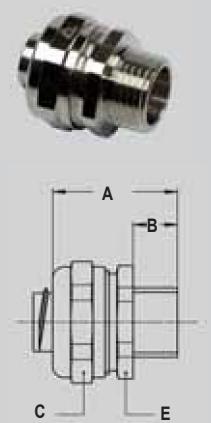


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
NPT	Size (mm)									
NPT 1/2"	16	11,2	32	12	26	-	24	10	714.012.4	4,6
NPT 1/2"	20	15,2	34	12	29	-	27	10	714.016.4	5,4
NPT 3/4"	25	19,2	35	12	35	-	33	5	714.020.4	7,8
NPT 1"	32	25,9	37	13	45	-	44	5	714.026.4	14,2

**NPT 90° swivel fitting, male, nickel plated brass
(including connection set)**

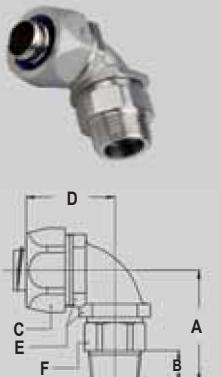

Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm						Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E	F			
NPT	Size (mm)										
NPT 1/2"	16	10,7	41	12	26	35	22	22	10	819.912.4	12,0
NPT 1/2"	20	13,9	41	12	29	37	27	25	10	819.916.4	14,0
NPT 3/4"	25	17,4	48	12	35	44	33	31	5	819.920.4	23,5
NPT 1"	32	23,4	56	13	45	55	42	38	5	819.926.4	42,0

**Conduit connector, nickel plated brass
(including connection set)**

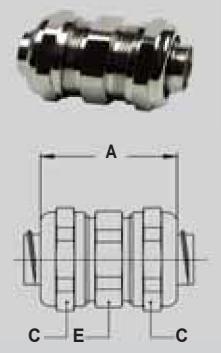

Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	12	8,3	41	-	26	-	24	10	784.010.4	7,4
-	16	11,2	41	-	26	-	24	10	784.012.4	7,4
-	20	15,2	45	-	29	-	27	10	784.016.4	8,8
-	25	19,2	48	-	35	-	33	5	784.020.4	13,0
-	32	25,9	53	-	45	-	44	5	784.026.4	25,2

ANACONDA MULTITITE

LIQUID-TIGHT FITTINGS FOR MULTITITE IP 68



Anaconda IP 68 nickel plated brass fittings for FCD & FCE.

The nickel plated brass Anaconda IP 68 fittings can be used with Anaconda FCD and FCE conduits. This Anaconda fitting offers besides a good corrosion protection also a high degree of protection, IP 68, and a nice appearance. Because the design is universal up to 1" all types of Anaconda fittings are possible in this range.



Material & Construction:

Construction: Nickel plated brass fitting, consisting of 5 parts (counter nut, filler ring, sealing sleeve, ferrule and body).


Material: Counter nut, filler ring, ferrule and body are nickel plated brass. Sealing sleeve is NBR-rubber.

Temperature: -45 °C till +105 °C continuous, (cable-hose-fittings are -40 °C till +100 °C).

Protection class: IP 68 (dust-proof, water-tight).

Swivel fittings are limited to IP 67.


Colour: Metal.

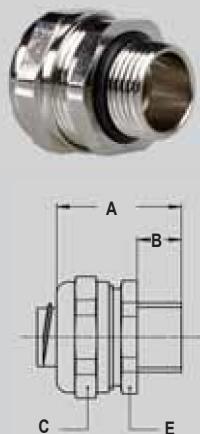

ISO straight fitting, compact, male, nickel plated brass (including connection set)



Thread	FCD / FCE	Min. Internal	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M12 x 1,5	12	8,5	31	10	22	-	20	10	812.012.5	3,8
M16 x 1,5	16	11,2	30	10	26	-	24	10	712.016.5	4,2
M20 x 1,5	16	11,2	30	10	26	-	24	10	712.017.5	4,4
M20 x 1,5	20	15,2	32	10	29	-	27	10	712.020.5	5,0
M25 x 1,5	25	19,2	33	10	35	-	33	5	712.025.5	7,4
M32 x 1,5	32	25,9	36	12	45	-	44	5	712.032.5	13,9
M40 x 1,5	40	34,5	45	14	59	-	55	2	812.040.5	18,8

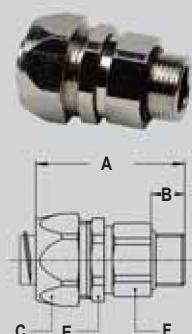


ISO straight swivel fitting, male, nickel plated brass, IP 67 (including connection set)




Thread	FCD / FCE	Min. Internal	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F			
M16 x 1,5	16	10,7	48	10	26	24	21	10	813.016.5	8,1
M20 x 1,5	20	13,9	49	10	29	27	25	10	813.020.5	10,2
M25 x 1,5	25	17,4	49	10	35	33	31	5	813.025.5	13,8
M32 x 1,5	32	23,4	55	12	45	42	38	5	813.032.5	32,5

**ISO 90° fitting, compact, male, nickel plated brass
(including connection set)**




Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	16	11,2	26	10	26	31	22	10	712.916.5	7,0
M20 x 1,5	16	11,2	26	10	26	32	24	10	712.917.5	7,2
M20 x 1,5	20	15,2	28	10	29	34	27	10	712.920.5	8,4
M25 x 1,5	25	19,2	32	10	35	40	33	5	712.925.5	17,5
M32 x 1,5	32	25,9	40	12	45	49	42	5	712.932.5	29,4

ISO 90° swivel fitting, male, nickel plated brass IP 67 (including connection set)




Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm						Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E	F			
M16 x 1,5	16	10,7	39	10	26	35	22	21	10	813.916.5	10,8
M20 x 1,5	20	13,9	39	10	29	37	27	25	10	813.920.5	13,2
M25 x 1,5	25	17,4	46	10	35	44	33	31	5	813.925.5	22,8
M32 x 1,5	32	23,4	55	12	45	55	42	38	5	813.932.5	41,4

**ISO cable-hose fitting, male, nickel plated brass
(including connection set).**



Thread	FCD / FCE	Clamping Range (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	E	F			
M16 x 1,5	16	3 - 10	64	12	26	24	20	10	812.716.5	8,2
M20 x 1,5	16	6 - 11	57	12	26	24	22	10	812.717.5	9,5
M20 x 1,5	20	7 - 14	64	12	29	27	24	10	812.720.5	10,2
M25 x 1,5	20	10 - 14	62	12	29	27	27	10	812.722.5	11,7
M25 x 1,5	25	9 - 18	77	15	35	33	30	5	812.725.5	17,0
M32 x 1,5	25	13 - 18	70	15	35	33	34	5	812.728.5	19,6
M32 x 1,5	32	13 - 25	88	15	45	43	40	5	812.732.5	31,0

**ISO straight fitting, female, nickel plated brass
(including connection set).**





Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	16	11,2	35	12	26	-	24	10	812.316.5	5,0
M20 x 1,5	20	15,2	37	13	29	-	27	10	812.320.5	7,6
M25 x 1,5	25	19,2	40	15	35	-	33	5	812.325.5	9,0
M32 x 1,5	32	25,9	46	15	45	-	43	5	812.332.5	18,3

**ANAconda
MULTITITE**


**LIQUID-TIGHT
FITTINGS FOR
MULTITITE
IP 68**

**Pg straight fitting, compact, male, nickel plated brass
(including connection set)**

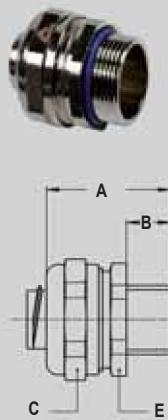


Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg										
Pg 11	16	11,2	30	10	26	-	24	10	710.011.5	4,2
Pg 13,5	16	11,2	30	10	26	-	24	10	710.013.5	4,4
Pg 16	20	15,2	32	10	29	-	27	10	710.016.5	5,0
Pg 21	25	19,2	33	10	35	-	33	5	710.021.5	7,4
Pg 29	32	25,9	36	12	45	-	44	5	710.029.5	13,9

**Pg 90° fitting, compact, male, nickel plated brass
(including connection set)**




Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg										
Pg 11	16	11,2	26	10	26	32	24	10	710.911.5	7,0
Pg 13,5	16	11,2	26	10	26	32	24	10	710.913.5	7,2
Pg 16	20	15,2	28	10	29	34	27	10	710.916.5	8,4
Pg 21	25	19,2	32	10	35	40	33	5	710.921.5	17,5
Pg 29	32	25,9	40	12	45	49	42	5	710.929.5	29,4

**Pg straight fitting, female, nickel plated brass
(including connection set).**



Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
Pg										
Pg 11	16	11,2	35	12	26	-	24	10	810.311.5	5,3
Pg 13,5	16	11,2	35	12	26	-	24	10	810.313.5	5,3
Pg 16	20	15,2	37	13	29	-	27	10	810.316.5	6,3
Pg 21	25	19,2	40	15	35	-	33	5	810.321.5	9,3
Pg 29	32	25,9	46	15	45	-	43	5	810.329.5	20,7

**Conduit connector, nickel plated brass
(including connection set)**



Thread	FCD / FCE	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	16	11,2	41	-	26	-	24	10	784.012.5	7,4
-	20	15,2	45	-	29	-	27	10	784.016.5	8,8
-	25	19,2	48	-	35	-	33	5	784.020.5	13,0
-	32	25,9	53	-	45	-	44	5	784.026.5	25,2

**ANACONDA
MULTITITE**

**LIQUID-TIGHT
FITTINGS FOR
MULTITITE
IP 68**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Non-Heat Shrink Tubing and Sleeves category:

Click to view products by ANAMET EUROPE manufacturer:

Other Similar products are found below :

[CTA-0053](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#) [120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-123-06](#) [120-123-10](#) [120-125-12BL](#) [120-125-12R](#) [120-125-20R](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#) [120-105-1-1-06BE](#) [120-105-1-1-06CE](#) [120-116-1-1-06BP](#) [120-116-1-1-10BP](#) [120-116-1-1-12BF](#) [120-123-12](#) [120-125-09](#) [120-125-12](#) [120-125-12Y](#) [120-125-52BL](#) [120-S002-12](#) [HC1B-7008-0375-0](#) [120-S001-09](#) [120-S002-09](#) [121-101-1-1-56BFC](#) [121-101-1-1-64BFC](#) [RAY-90-3.0\(100\)](#) [20675-2](#) [8S42-100FR-CS8184](#) [SAS-115-1-1048-1X](#) [SAS-160-1-1048-1X](#) [25T-GB](#) [RAY-103-10.0\(100\)](#) [RAY-103-4.0\(100\)](#) [4627-S](#) [3-1991136-0](#) [561-SL1000NYGY](#) [561-SL1000PP](#) [561-SL250FRPP](#)