


High Definition VideoScope Inspection Cameras

Narrow diameter cameras with 5.7" High Definition Color LCD* Monitor

Deliver high image resolution on large color display where images and videos can be stored on SD memory card (included)


Features:

- **Model HDV610** - 5.5mm diameter camera head with 1m flexible cable
- **Model HDV620** - 5.8mm diameter camera head with 1m semi-rigid cable
- 5.7" color LCD* TFT with high definition 640 x 480 VGA pixel resolution
- Mini, high-resolution water-proof (IP57) camera head
- Rugged oil/chemical resistant and water/drop proof housing (IP67/2m)
- Non-slip ergonomic handles for ambidextrous use
- SD memory card included to store >15,000 images
- Video recording (up to 4 hours) with Voice annotation
- AV output for viewing images and video directly on a monitor
- Video and images can be transferred to a PC via the SD card or USB output
- An optional wireless transmitter (HDV-WTX) connects to your camera cable and allows you to transmit video up to 100ft (30m) from the measurement point to your monitor

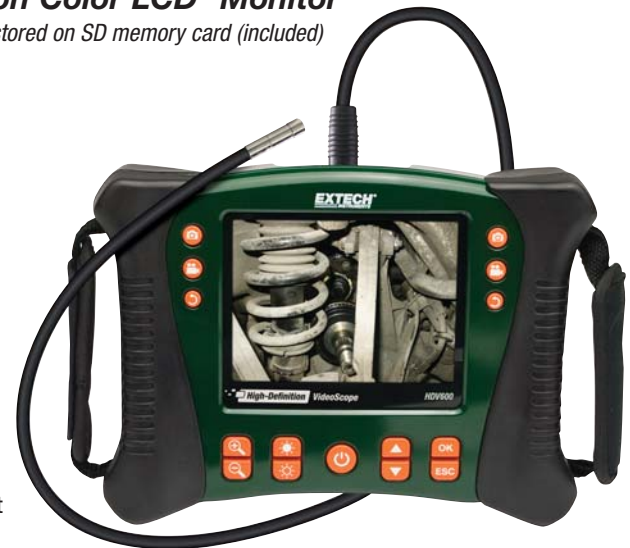

Specifications

Camera	
Minimum Focus distance	2.36" (60mm); macro: 0.59" (15mm)
Field of View	65°
Shaft diameter	HDV610: 0.22" (5.5mm) HDV620: 0.23" (5.8mm)
Working length	39" (1m)
Borescope	
*LCD Color TFT Display	5.7" (14.5cm) size; 5.3" (13.5cm) viewable
Pixels	640 x 480 VGA pixel resolution (320 x 240 for 4mm camera)
Frame Rate	30 fps frame rate (NTSC & PAL)
SD Card	2GB SD memory card included (supports up to 32GB SD storage)
Operating	up to 4 hours AVI video



- A. Camera with 4 built-in bright LED lights illuminate dark areas.
- B. HDV-WTX — Optional Wireless Transmitter transmits video to the main display from tight or hard to reach places up to 100ft (30m) away
- C. Optional Articulating (6mm diameter) camera probes adjust up to 240° viewing angle (see below for ordering)

Ordering Information:

HDV610High Definition VideoScope (5.5mm diameter/1m Flexible Cable)
HDV620High Definition VideoScope (5.8mm diameter/1m Semi-Rigid Cable)

Video Inspector Monitor (order camera head separately from accessories listed below)

HDV600High Definition VideoScope (Monitor and hard carrying case only)

Optional camera accessories

HDV-TX16mm Articulating VideoScope Camera Head with Macro lens and 1m Semi-Rigid Cable
HDV-WTX16mm Wireless Articulating VideoScope Camera Head w/Macro lens & 1m Semi-Rigid Cable
HDV-TX26mm Articulating VideoScope Camera Head w/Macro lens and 2m Semi-Rigid Cable
HDV-WTX26mm Wireless Articulating VideoScope Camera Head w/Macro lens & 2m Semi-Rigid Cable
HDV-4CAM-1FM4mm VideoScope Camera Head with Macro lens and 1m Flexible Cable
HDV-4CAM-5FM4mm VideoScope Camera Head with Macro lens and 5m Flexible Cable
HDV-5CAM-1FM5.5mm VideoScope Camera Head with Macro lens and 1m Flexible Cable
HDV-5CAM-3F5.5mm VideoScope Camera Head with long depth of field and 3m Flexible Cable
HDV-5CAM-3FM5.5mm VideoScope Camera Head with Macro lens and 3m Flexible Cable
HDV-5CAM-30FM5.5mm VideoScope Camera Head with Macro lens and 30m Flexible Cable
HDV-5CAM-10F5.5mm VideoScope Camera Head with long depth of field and 10m Flexible Cable
HDV-5CAM-1R5.8mm VideoScope Camera Head with long depth of field and 1m Semi-Rigid Cable
HDV-5CAM-1RM5.8mm VideoScope Camera Head with Macro lens and 1m Semi-Rigid Cable
HDV-5CAM-3R5.8mm VideoScope Camera Head with long depth of field & 3m Semi-Rigid Cable
HDV-5CAM-3RM5.8mm VideoScope Camera Head with Macro lens and 3m Semi-Rigid Cable
HDV-25CAM-10G25mm VideoScope Camera Head with long depth of field and 10m Fiberglass Cable
HDV-25CAM-30G25mm VideoScope Camera Head with long depth of field and 30m Fiberglass Cable
HDV-WTXWireless Transmitter
HDV-PCSpare Patch Cable for HDV Series
ADPTR-HDVReplacement AC Adaptor

HDV610 and HDV620 Include:

- VideoScope, SD memory card, handset with camera probe and 1m cable (Probe accessories: magnet, 45° mirror, and anti-snag tip), 3.7V rechargeable Li-Polymer battery, patch cable, Universal AC adapter (110-240V, four plugs), USB and AV cables, and hard carrying case

Applications:

- Industrial Processing & Manufacturing
- Heavy Equipment
- HVAC/Boilers
- Aerospace
- Government & Security
- Insurance
- Mining and Aggregate
- Aviation AOG and FBO
- Power Generation
- Building Inspection & Commissioning
- PetroChem/Refineries
- Infrastructure



Camera probes with cable length greater than 3m will be coiled on a spool as shown on the left.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [S-11](#) [FLUKE-LDG](#) [382153](#) [FM100](#) [RH210](#) [382253](#) [MO290-P](#)
[GEO-CABLE-REEL-50M](#) [T197914](#) [RD300-L](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [IR31CE](#) [IR32BC](#) [IR33BC](#) [MP7217TC](#) [NGM-1](#) [SGX-](#)
[7NH3](#) [UT381](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-NmHc-100](#) [3.000.401](#) [AX-7535](#) [CS-9S6SS-A](#) [P 2800 A](#) [P 2801](#) [P 2802](#) [P 5039](#) [P 5130](#) [P](#)
[5055](#) [P 5060](#) [P 5065](#) [P 5086](#) [P 5090](#) [P 5110](#) [P 5115](#) [P 5135](#) [P 5140](#) [P 5145](#) [P 5150](#) [P 5160](#)