



高效整流二极管 High Efficient Rectifier


■ 特征 Features

- I_o 2.0A
- V_{RRM} 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability

■ Applications

- 整流用 Rectifier

■ 外形尺寸和印记 Outline Dimensions and Mark

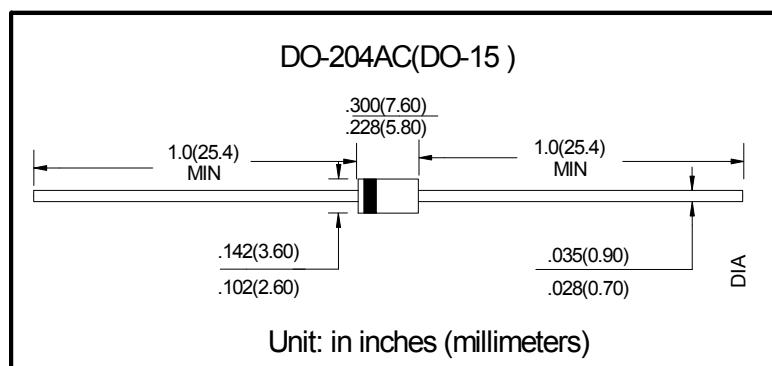

■ 极限值 (绝对最大额定值)

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	HER2							
				01	02	03	04	05	06	07	08
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	V		50	100	200	300	400	600	800	1000
正向平均电流 Average Forward Current	I _{F(AV)}	A	正弦半波 60Hz, 电阻负载 Ta (FIG.1) 60Hz Half-sine wave, Resistance load, Ta (FIG.1)								2
正向 (不重复) 浪涌电流 Surge(Non-repetitive)Forward Current	I _{FSM}	A	正弦半波 60Hz, 一个周期, Ta=25°C 60Hz Half-sine wave, 1 cycle, Ta=25°C								60
结温 Junction Temperature	T _J	°C									-55~+125
储存温度 Storage Temperature	T _{STG}	°C									-55 ~ +150





■ 电特性 (Ta=25°C 除非另有规定)

Electrical Characteristics (Ta=25°C Unless otherwise specified)


参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	HER2							
				01	02	03	04	05	06	07	08
正向峰值电压 Peak Forward Voltage	V _{FM}	V	I _{FM} =2A		1.0		1.3		1.7		
反向峰值电流 Peak Reverse Current	I _{RRM1}	μA	V _{RM} =V _{RRM}	T _a =25°C			2.5				
	I _{RRM2}			T _a =125°C			150				
反向恢复时间 Reverse Recovery time	t _r	ns	I _F =0.5A I _R =1A I _{RR} =0.25A		50		75				
热阻(典型) Thermal Resistance(Typical)	R _{θJ-A}	°C/W	结和环境之间 Between junction and ambient		40						
结电容 Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C.		50		35				



■特性曲线(典型) Characteristics(Typical)

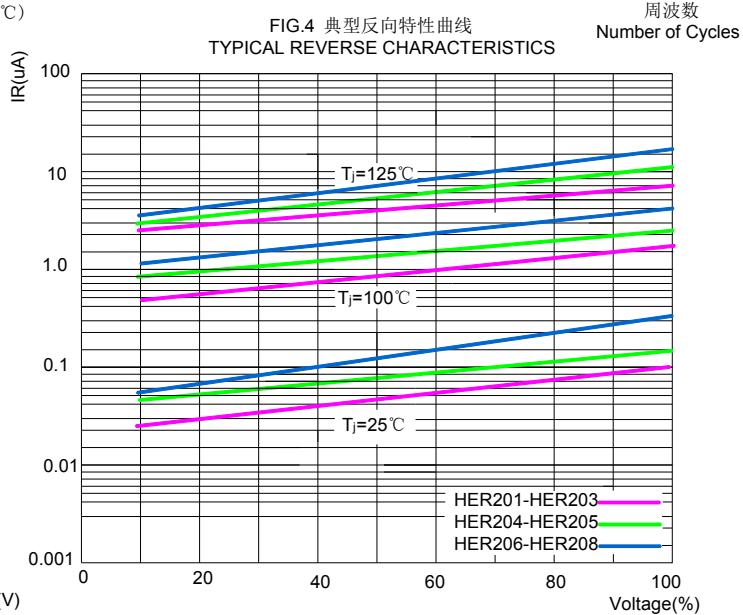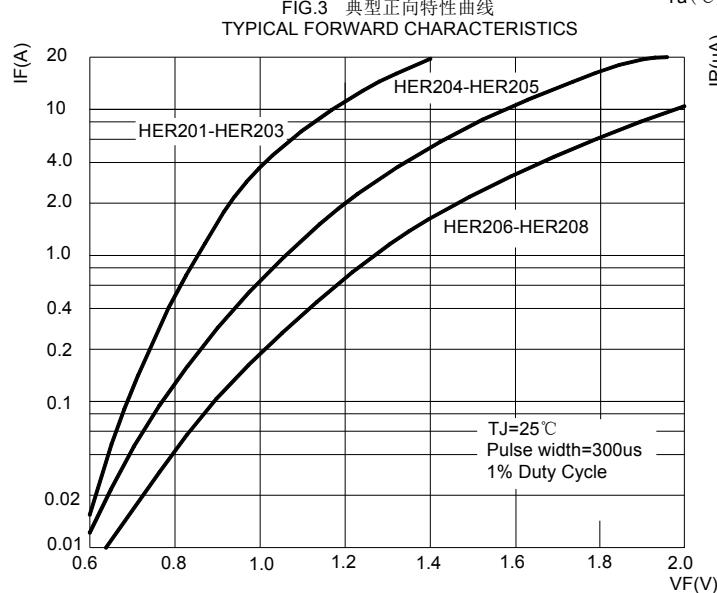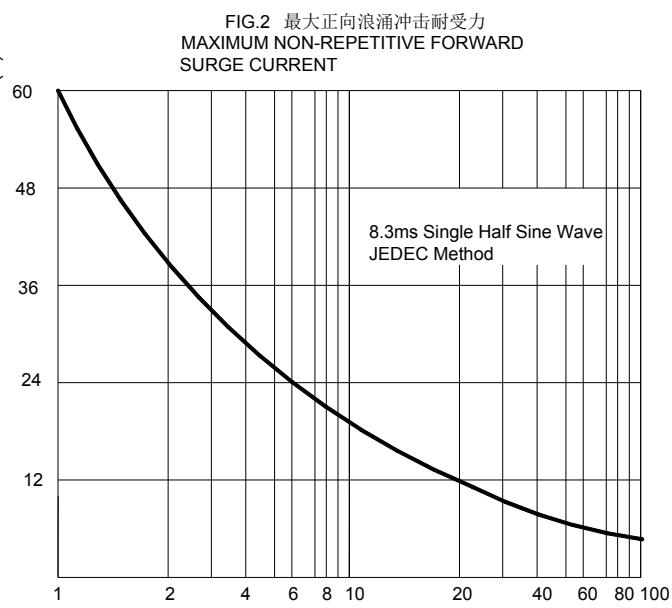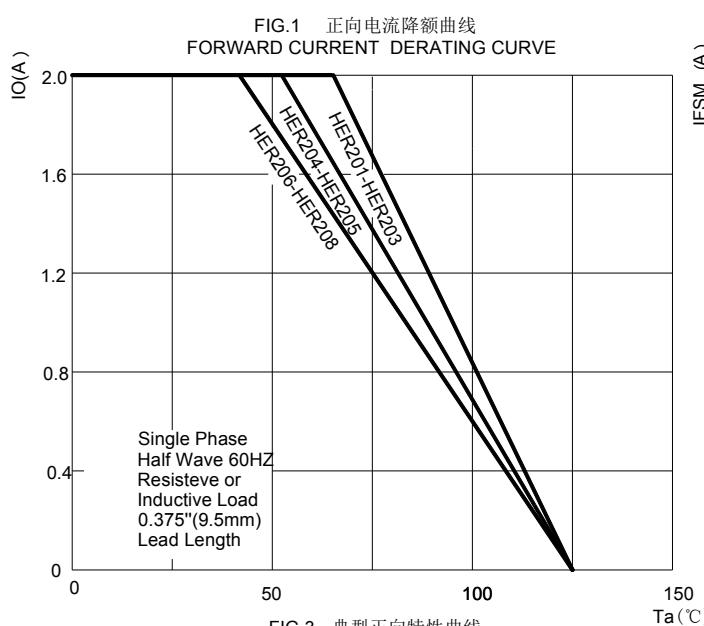

**FIG.5 反向恢复时间试验电路及测试波形示意图
Diagram of circuit and Testing wave form of reverse recovery time**

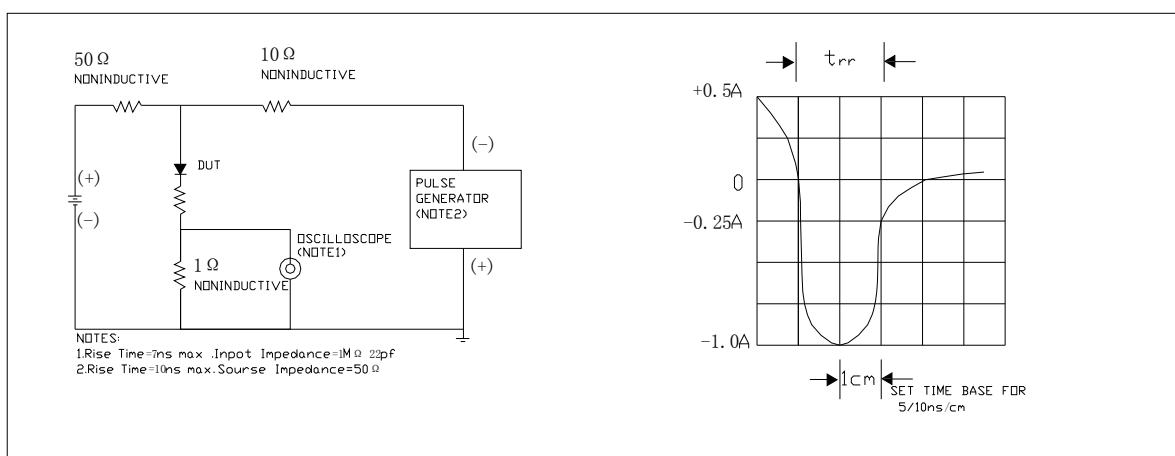

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Yangjie manufacturer:

Other Similar products are found below :

[053684A](#) [057245E](#) [10A06-TP](#) [10A10](#) [10A10](#) [10A10G](#) [10A2](#) [10A4](#) [150K20A](#) [150K60A](#) [150K80A](#) [150KR80A](#) [1A1](#) [1A2](#) [1A3](#) [1A4](#) [1A4](#) [1A5](#) [1A6](#) [1A7](#) [1A7](#) [1A7](#) [1A7A](#) [1G7](#) [1N3064TR](#) [1N3070](#) [1N3070TR](#) [1N3295A](#) [1N3295AR](#) [1N3296A](#) [1N3493R-SGS](#) [1N3595](#) [1N3595TR](#) [1N3595US](#) [1N3600](#) [1N3600 TR](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001](#) [1N4001A](#) [1N4001G](#) [1N4001G](#) [1N4001-T](#) [1N4001W](#)