

PRECISION POWER WIREWOUND RESISTORS SILICONE COATED 1/2 WATT TO 50 WATT

100 SERIES




World's widest range! 0.005Ω ~2MΩ, ±0.005% ~10%, 0.5W ~50W.
Low cost, available from stock & exclusive **SWIFT™** delivery program.

OPTIONS

- Option X: Low Inductance
- Option P: Increased Pulse Capability
- Option F: Flameproof Coating UL94V-0
- Option ER: 100-Hour Burn-In
- Option B: Increased Power
- Radial leads (opt.R), low thermal emf (opt.E), matched sets, custom marking, cut & form, Hi-Rel screening, non-standard values, high-voltage, etc. Customized components are RCD's speciality!

DERATING (derate W/V/A ratings when ambient temp >25°C):
Char. U is max. power for ±0.5% typ. operational life stability & 275°C hotspot
Char. V is max. power for ±3% stability & 350°C hotspot

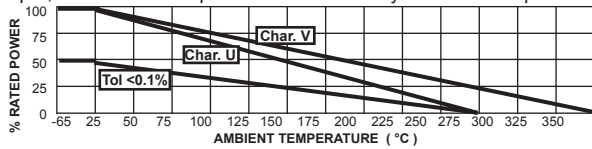


Series 100 resistors offer exceptional performance at an economical cost. Superior stability results from welded construction and windings of premium grade resistance wire on thermally conductive ceramic cores. Hi-temp silicone coating provides excellent protection & solvent resistance. Tin (or SnPb) coated copper/copperweld leads ensure proper solderability and extended shelf life. Marked with resis.value & tol. as minimum (custom marking avail).

PULSE CAPABILITY: Excellent pulse ability is inherent with the all-welded wirewound construction, but can be enhanced by a factor of 50% or more via special Option P processing (up to 500 joules). Pulse capability is highly dependent on pulse duration, repetition rate & resis. value, consult factory.

INDUCTANCE: small sizes have inductance of 1- 50uH typ. Larger sizes and higher values typically have greater levels. For non-inductive design, specify Opt. X. The max. series inductance for Opt.X resistors at 0.5MHz is listed in table (per MIL-R-39007). Specialty constructions are available for even lower inductance levels (Opt.75 inductance= 50% of Opt.X, Opt.76=33%).

RCD Type	≤ 50Ω	> 50Ω
102X-140X	0.2μH	0.37μH
145X-160X	0.3μH	0.6μH
165X-178X	0.65μH	1.2μH



RCD Type	MIL Type ⁵	Std. Wattage Ratings ¹⁰		Opt.B Wattage Ratings ¹⁰		Resistance Range ^{6,7}	Maximum Voltage Rating ^{1,6}	DIMENSIONS [Numbers in brackets are mm]					
		Char.U	Char.V	Char.U	Char.V			A ³		C ²		D ⁸ ± .003 [.08]	
								± .062	[1.58]	110-155: ± .032	156-190: ± .045	Std.	Optional
102	-	0.5	0.8	0.8	1.0	.01Ω - 2K	30V	.16 ± .03	[4 ± .8]	.07 ± .02	[1.8 ± .5]	.020	-
110	RW81 (110B)	0.8	1.0	1.5	2.0	.01Ω - 8K	40V	.24 ± .03	[6 ± .8]	.085	[2.16]	.020	.024 (opt. 22)
115	-	1.0	1.2	1.5	2.0	.01Ω - 12K	45V	.312	[7.92]	.085	[2.16]	.020	.024 (opt. 22)
120	-	1.0	1.2	-	-	.01Ω - 15K	50V	.344	[8.74]	.096	[2.44]	.020	.024 (opt. 22)
125	RW70 (125B RW80)	1.5	1.8	2.0	2.5	.01Ω - 20K	55V	.385	[9.78]	.096	[2.44]	.020	.024 (opt. 22)
130	-	1.6	2.0	-	-	.01Ω - 22K	65V	.530	[13.5]	.096	[2.44]	.020	.024 (opt. 22)
133	-	2.0	3.0	3.0	4.0	.005Ω - 20K	80V	.355	[9.00]	.156	[3.96]	.031	.024 (opt. 22)
135	RW69	3.0	4.0	4.0	5.0	.005Ω - 40K	140V	.500	[12.7]	.188	[4.78]	.031	.024(22), .040(18)
140	RW79	3.0	4.0	4.0	5.0	.005Ω - 50K	140V	.550	[14.2]	.188	[4.78]	.031	.040 (opt. 18)
145	-	3.5	4.5	4.5	6.5	.005Ω - 60K	180V	.770	[19.6]	.188	[4.78]	.031	.040 (opt. 18)
150	-	3.5	4.5	5.0	7.0	.005Ω - 60K	150V	.500	[12.7]	.225	[5.72]	.040	.032 (opt. 20)
155	-	4.0	5.0	6.0	8.0	.005Ω - 100K	210V	.625	[15.9]	.225	[5.72]	.040	.032 (opt. 20)
156	-	5.0	6.0	-	-	.005Ω - 150K	300V	.800	[20.3]	.250	[6.35]	.040	.032 (opt. 20)
160	RW74	5.0	7.0	7.0	10	.005Ω - 200K	400V	.875	[22.2]	.312	[7.92]	.040	.032 (opt. 20)
165	RW67	6.0	7.5	-	-	.005Ω - 220K	450V	1.000	[25.4]	.312	[7.92]	.040	.032 (opt. 20)
170	-	7.0	9.0	10	12	.005Ω - 300K	550V	1.200	[30.9]	.312	[7.92]	.040	.032 (opt. 20)
171	-	7.0	8.5	-	-	.005Ω - 250K	700V	1.660	[42.2]	.208	[5.28]	.031	.040 (opt. 18)
172	-	8.5	10	-	-	.005Ω - 400K	900V	2.100	[53.3]	.225	[5.72]	.031	.040 (opt. 18)
173	-	9.0	11	12	14	.005Ω - 400K	650V	1.550	[39.4]	.300	[7.62]	.040	.032 (opt. 20)
175	RW68, 78	10	13	15	18	.005Ω - 500K	900V	1.720 ⁴	[43.7]	.350 ⁴	[8.89]	.040	.032 (opt. 20)
176	-	10	12	-	-	.005Ω - 500K	800V	1.875	[47.6]	.300	[7.62]	.040	.032 (opt. 20)
178	-	13	15	-	-	.01Ω - 750K	1150V	2.410	[61.2]	.350	[8.89]	.040	.032 (opt. 20)
180	RW56	14	16	16	20	.01Ω - 800K	1000V	2.100	[53.3]	.500	[12.7]	.040	-
185	-	20	25	-	-	.015Ω - 1M	1350V	2.800	[71.1]	.500	[12.7]	.040	-
186	-	25	30	-	-	.010Ω - 1M	1400V	4.060	[103]	.350	[8.89]	.040	.032 (opt. 20)
190	-	40	50	-	-	.025Ω - 2M	1500V	5.000	[127]	.500	[12.7]	.040	-

¹ Working voltage=(PR)^{1/2}, not to exceed max rating (multiply by 0.7 for Opt.X) ² Allow .032" additional for Opt X, Opt 33, or values <1Ω ³ Coating overflow onto each lead ≤2x typ ⁴ Performance is typical for Char.U with tol ≤1%, & is dependent on resis, options, etc. Consult factory for Char.V & tol >1% ⁵ Military p/n's are given for reference only & do not imply qualification or exact interchangeability ⁶ Increased range avail ⁷ Resis value measured at 3/8" ± 1/16" from each end of body ⁸ Heavier lead gauge option is recommended on low values to enable lower leadwire resis, increased current, & improved TC ⁹ Lead length applies to bulk packaged units (taped parts generally have shorter leads, refer to taping spec.) ¹⁰ Series 100 has dual power rating depending on temp.rise & stability requirements; derate 50% to ensure high reliability & operational life stability

TYPICAL PERFORMANCE ⁴

Operational Life (Char.U)	±0.5% (±1% on Opt.B & sizes ≥10W)
Thermal Shock	±0.2%
Moisture Resistance	±0.2%
Shock and Vibration	±0.1%
Overload, 5 Sec	5x rated W 102-156, 10x W 160-190
Dielectric Strength: type 102-130	300V (for 500V specify opt.23)
Dielectric Strength: type 133-190	500V (for 1KV specify opt.33)
Max. Current (not to exceed wattage or voltage rating)	Resistors with .020" lead dia = 11A, .024" = 15A, .032" = 22A, .040" = 30A
TCR: temp coefficient	≥10Ω 20ppm (5 & 10ppm avail.)
of resistance element,	1- 9.9Ω 50ppm (10, 20, 30ppm avail.)
tol ≤1% (contact	0.1-.99Ω 90ppm (20, 30, 50 ppm avail.)
factory >1%)	050-.099Ω 300ppm (50, 100, 200ppm avail.)
	.01Ω -.049Ω 600ppm (100, 200, 300ppm avail.)

P/N DESIGNATION:

135 - **102** - **J** **B** **W**

RCD Type

Options: X, R, V, P, F, ER, E, B, 76, 75, 33, 22, 20, 18 (leave blank if standard)

Resis. Code 1% & tighter tols: 3 signif. digits & multiplier, e.g. R100= 0.1Ω, 1R00= 1Ω, 1000= 100Ω, 1001= 1KΩ.

2%-10%: 2digits & multiplier (R10= .1Ω, 1R0=1Ω, 100=10Ω, 102=1K). Use extra digits as needed: R005, R0075, R012, etc.

Tolerance: K=10%, J=5%, H=3%, G=2%, F=1%, D=0.5%, C=0.25%, B=0.1%, A=0.05%, Q=0.02%, T=0.01%, V= .005%

Packaging: B= Bulk, T= T&R (avail. on type 102 to 176)

Optional TC: 5= 5ppm, 10= 10ppm, 20= 20ppm, 30= 30ppm, 50= 50ppm, 101= 100ppm, 201=200ppm (leave blank if std)

Termination: W=RoHS (std), Q= Tin/Lead (leave blank if both acceptable)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [rcd manufacturer](#):

Other Similar products are found below :

[630-8R60-FBW](#) [640B-R100-FBW](#) [605B-1R50-FBW](#) [CC1-104-KBW](#) [PR1-3R3-JBW](#) [LVF15-R010-FBW](#) [210-1R00-FBW](#) [635B-3R00-FBW](#)
[PWLL25-302-JBW](#) [160-1002-FBW](#) [605B-R100-FBW](#) [210-10R0-FBW](#) [610Q2-331-JBW](#) [160-2500-FBW](#) [160-1R00-FBW](#) [135X-800-JBW](#)
[PR1/2XER-13R0-FBQ](#) [135-1500-FBW](#) [235-1001-FBW](#) [610Q-1250-FBW](#) [135-180-JBW](#) [175-5000-FBW](#) [135-5R00-FBW](#) [610-1R00-FBW](#)
[160-510-JBW](#) [175-131-JBW](#) [232-1000-FBW](#) [PW5-251-JBW](#) [PW5-500-JBW](#) [RSF1B-4R7-JBW](#) [RMF3-103-JBW](#) [135-2500-FBW](#) [135-821-](#)
[JBW](#) [160-120-JBW](#) [630X-100-JBW](#) [LVF15-R040-FBW](#) [135-152-JBW](#) [160-3002-FBW](#) [175-R01-JBW](#) [160-244-JBW](#) [610-5001-FBW](#) [160-](#)
[1R5-JBW](#) [255-1000-FBW](#) [175-R500-FBW](#) [160-331-JBW](#) [175-2R4-JBW](#) [160-R100-FBW](#) [175-820-JBW](#) [PW5-912-JBW](#) [160-121-JBW](#)