

# International Rectifier

PD - 95251A

## IRF7353D1PbF


FETKY™ MOSFET / Schottky Diode

- Co-packaged HEXFET® Power MOSFET and Schottky Diode
- Ideal For Buck Regulator Applications
- N-Channel HEXFET
- Low  $V_F$  Schottky Rectifier
- Generation 5 Technology
- SO-8 Footprint
- Lead-Free


### Description

The FETKY family of co-packaged MOSFETs and Schottky diodes offers the designer an innovative, board space saving solution for switching regulator and power management applications. Generation 5 HEXFET Power MOSFETs utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. Combining this technology with International Rectifier's low forward drop Schottky rectifiers results in an extremely efficient device suitable for use in a wide variety of portable electronics applications.

The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics. The SO-8 package is designed for vapor phase, infrared or wave soldering techniques.



$V_{DSS} = 30V$
$R_{DS(on)} = 0.029\Omega$
Schottky $V_f = 0.39V$



### Absolute Maximum Ratings ( $T_A = 25^\circ C$ unless otherwise noted)

Parameter	Maximum	Units
$I_D @ T_A = 25^\circ C$	Continuous Drain Current	A
$I_D @ T_A = 70^\circ C$		
$I_{DM}$	Pulsed Drain Current ①	
$P_D @ T_A = 25^\circ C$		
$P_D @ T_A = 70^\circ C$	Power Dissipation	W
	Linear Derating Factor	mW/°C
$V_{GS}$	Gate-to-Source Voltage	V
$dv/dt$	Peak Diode Recovery $dv/dt$ ②	V/ns
$T_J, T_{STG}$	Junction and Storage Temperature Range	°C

### Thermal Resistance Ratings

Parameter	Maximum	Units
$R_{θJA}$	62.5	°C/W

#### Notes:

- ① Repetitive rating; pulse width limited by maximum junction temperature (see figure 9)
- ② Starting  $T_J = 25^\circ C$ ,  $L = 10mH$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 4.0A$
- ③  $I_{SD} \leq 4.0A$ ,  $di/dt \leq 74A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 150^\circ C$
- ④ Surface mounted on FR-4 board,  $t \leq 10sec$ .

# IRF7353D1PbF

International  
Rectifier

## MOSFET Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameter		Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{\text{GS}} = 0\text{V}$ , $I_D = 250\mu\text{A}$
$R_{\text{DS}(\text{on})}$	Static Drain-to-Source On-Resistance	—	0.023	0.032	$\Omega$	$V_{\text{GS}} = 10\text{V}$ , $I_D = 5.8\text{A}$
		—	0.032	0.046		$V_{\text{GS}} = 4.5\text{V}$ , $I_D = 4.7\text{A}$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	1.0	—	—	V	$V_{\text{DS}} = V_{\text{GS}}$ , $I_D = 250\mu\text{A}$
$g_f$	Forward Transconductance	—	14	—	S	$V_{\text{DS}} = 24\text{V}$ , $I_D = 5.8\text{A}$
$I_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	1.0	$\mu\text{A}$	$V_{\text{DS}} = 24\text{V}$ , $V_{\text{GS}} = 0\text{V}$
		—	—	25		$V_{\text{DS}} = 24\text{V}$ , $V_{\text{GS}} = 0\text{V}$ , $T_J = 55^\circ\text{C}$
$I_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{\text{GS}} = -20\text{V}$
$Q_g$	Total Gate Charge	—	22	33	nC	$I_D = 5.8\text{A}$
$Q_{\text{gs}}$	Gate-to-Source Charge	—	2.6	3.9		$V_{\text{DS}} = 24\text{V}$
$Q_{\text{gd}}$	Gate-to-Drain ("Miller") Charge	—	6.4	9.6		$V_{\text{GS}} = 10\text{V}$ (see figure 8)
$t_{\text{d}(\text{on})}$	Turn-On Delay Time	—	8.1	12	ns	$V_{\text{DD}} = 15\text{V}$
$t_r$	Rise Time	—	8.9	13		$I_D = 1.0\text{A}$
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time	—	26	39		$R_G = 6.0\Omega$
$t_f$	Fall Time	—	17	26		$R_D = 15\Omega$
$C_{\text{iss}}$	Input Capacitance	—	650	—	pF	$V_{\text{GS}} = 0\text{V}$
$C_{\text{oss}}$	Output Capacitance	—	320	—		$V_{\text{DS}} = 25\text{V}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	130	—		$f = 1.0\text{MHz}$ (see figure 7)

## MOSFET Source-Drain Ratings and Characteristics

Parameter		Min.	Typ.	Max.	Units	Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	2.5	A	
$I_{\text{SM}}$	Pulsed Source Current (Body Diode)	—	—	30		
$V_{\text{SD}}$	Body Diode Forward Voltage	—	0.78	1.0	V	$T_J = 25^\circ\text{C}$ , $I_S = 1.7\text{A}$ , $V_{\text{GS}} = 0\text{V}$
$t_{\text{rr}}$	Reverse Recovery Time (Body Diode)	—	45	68	ns	$T_J = 25^\circ\text{C}$ , $I_F = 1.7\text{A}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	58	87	nC	$dI/dt = 100\text{A}/\mu\text{s}$ ③


## Schottky Diode Maximum Ratings

	Parameter	Max.	Units	Conditions	
$I_{\text{F(av)}}$	Max. Average Forward Current	2.7	A	50% Duty Cycle. Rectangular Wave, $T_A = 25^\circ\text{C}$ See Fig. 14	
		1.9		$T_A = 70^\circ\text{C}$	
$I_{\text{SM}}$	Max. peak one cycle Non-repetitive Surge current	120	A	5μs sine or 3μs Rect. pulse	Following any rated load condition & with $V_{\text{RRM}}$ applied
		11		10ms sine or 6ms Rect. pulse	


## Schottky Diode Electrical Specifications

	Parameter	Max.	Units	Conditions	
$V_{\text{FM}}$	Max. Forward voltage drop	0.50	V	$I_F = 1.0\text{A}$ , $T_J = 25^\circ\text{C}$	
		0.62		$I_F = 2.0\text{A}$ , $T_J = 25^\circ\text{C}$	
		0.39		$I_F = 1.0\text{A}$ , $T_J = 125^\circ\text{C}$	
		0.57		$I_F = 2.0\text{A}$ , $T_J = 125^\circ\text{C}$ .	
$I_{\text{RM}}$	Max. Reverse Leakage current	0.06	mA	$V_R = 30\text{V}$	$T_J = 25^\circ\text{C}$
		16			$T_J = 125^\circ\text{C}$
$C_t$	Max. Junction Capacitance	92	pF	$V_R = 5\text{Vdc}$ ( 100kHz to 1 MHz) $25^\circ\text{C}$	
$dv/dt$	Max. Voltage Rate of Change	3600	V/μs	Rated $V_R$	


### Power Mosfet Characteristics

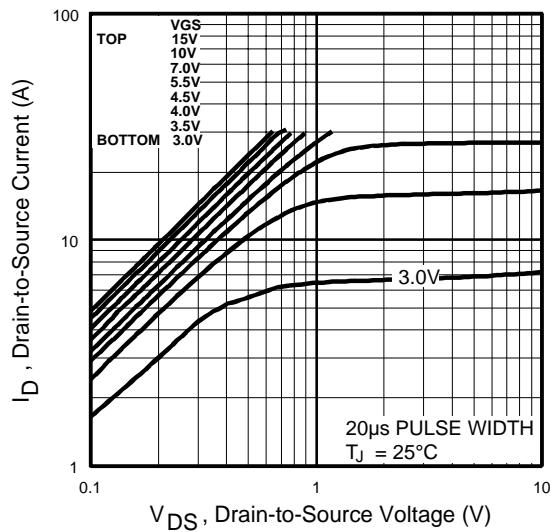


**Fig 1.** Typical Output Characteristics

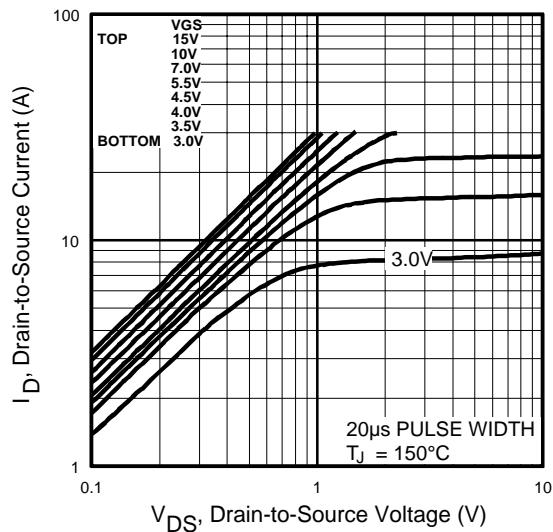

**Fig 2.** Typical Output Characteristics

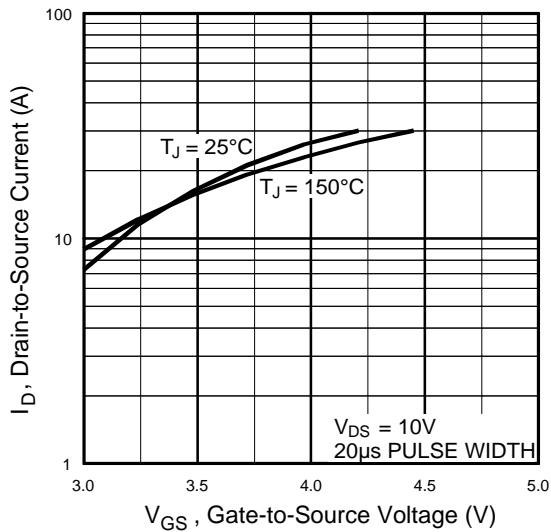

**Fig 3.** Typical Transfer Characteristics

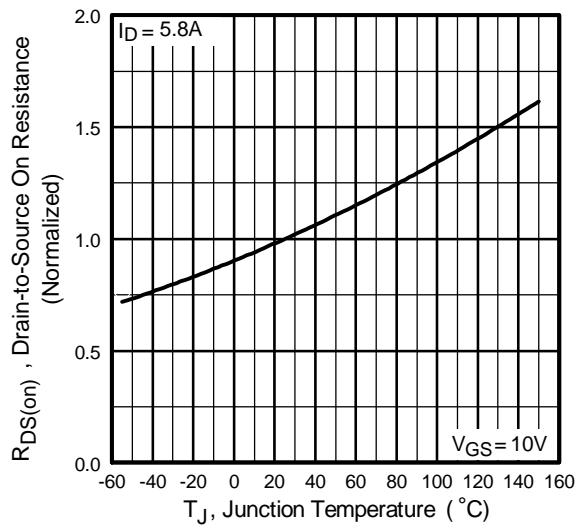


**Fig 4.** Normalized On-Resistance  
Vs. Temperature


# IRF7353D1PbF

International  
Rectifier


## Power Mosfet Characteristics

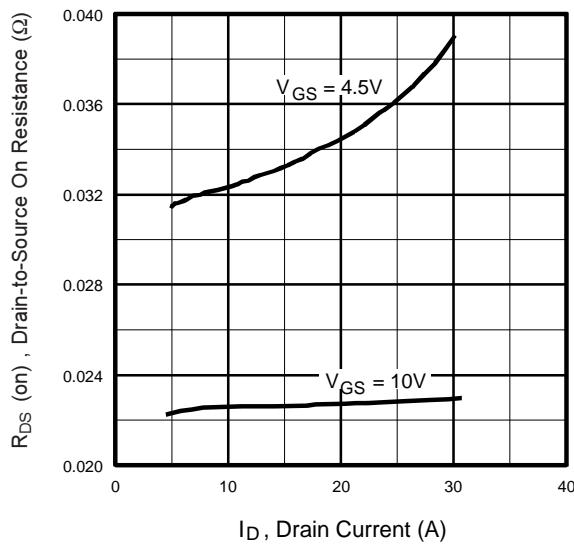


**Fig 5.** Typical On-Resistance Vs. Drain Current

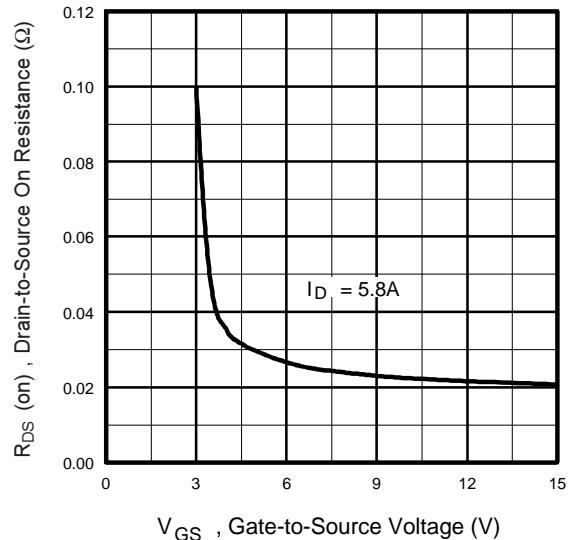

**Fig 6.** Typical On-Resistance Vs. Gate Voltage

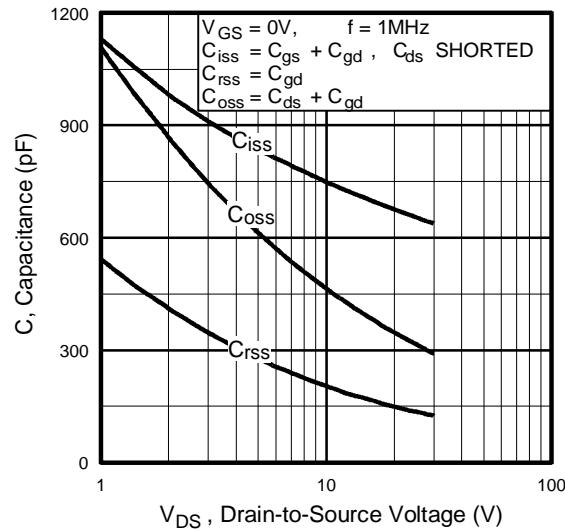


**Fig 7.** Typical Capacitance Vs. Drain-to-Source Voltage

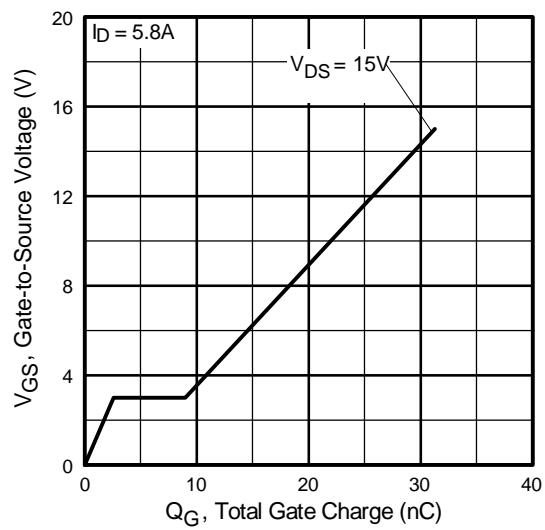


**Fig 8.** Typical Gate Charge Vs. Gate-to-Source Voltage

**Power Mosfet Characteristics**

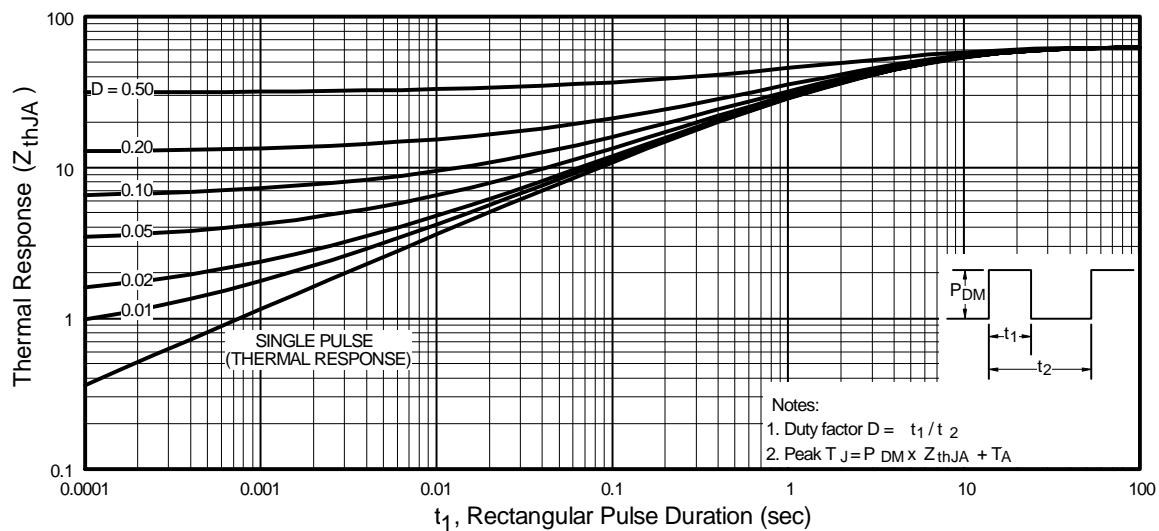


**Fig 9.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

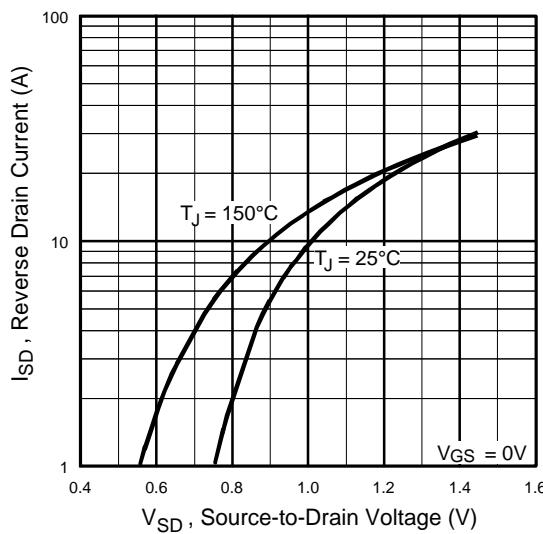


**Fig 10.** Typical Source-Drain Diode Forward Voltage

**IRF7353D1PbF**  
**Schottky Diode Characteristics**


International  
**IR** Rectifier

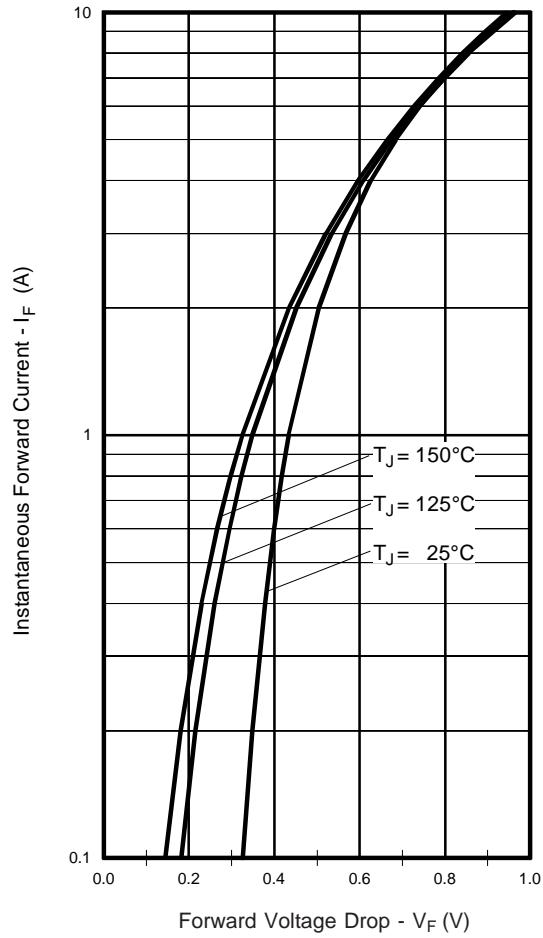

**Fig. 12** -Typical Forward Voltage Drop Characteristics

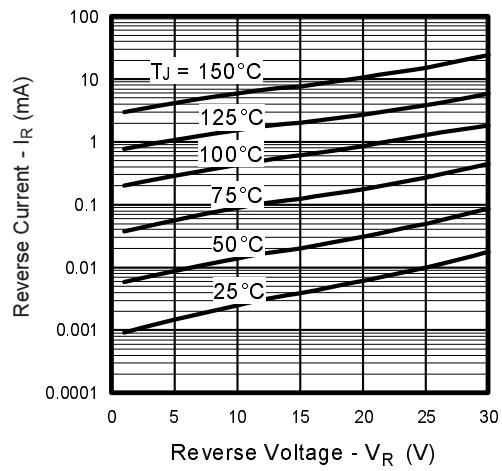


**Fig. 13** - Typical Values of Reverse Current Vs. Reverse Voltage

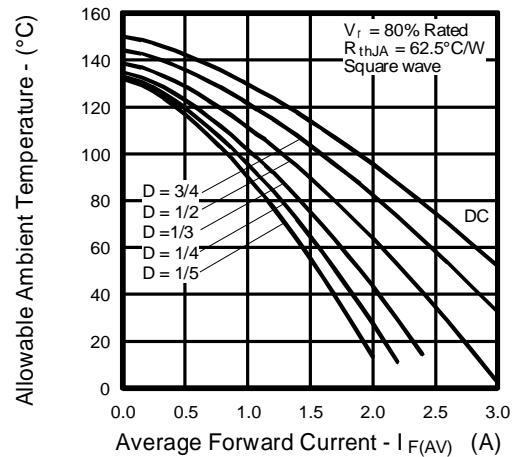


**Fig.14** - Maximum Allowable Ambient Temp. Vs. Forward Current

## SO-8 (Fetky) Package Outline (Dimensions are shown in millimeters (inches))

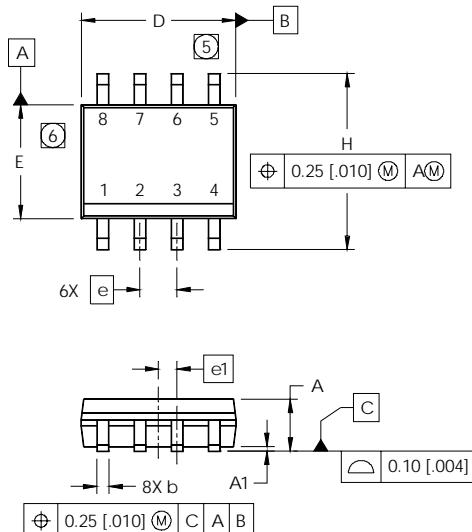


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°




### NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS.  
MOLD PROTRUSIONS NOT TO EXCEED 0.15 [.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS.  
MOLD PROTRUSIONS NOT TO EXCEED 0.25 [.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO  
A SUBSTRATE.

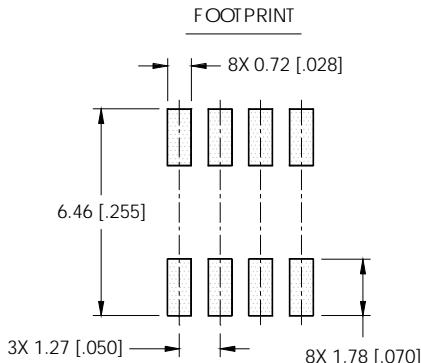

## SO-8 (Fetky) Part Marking Information

EXAMPLE: THIS IS AN IRF7807D1 (FETKY)

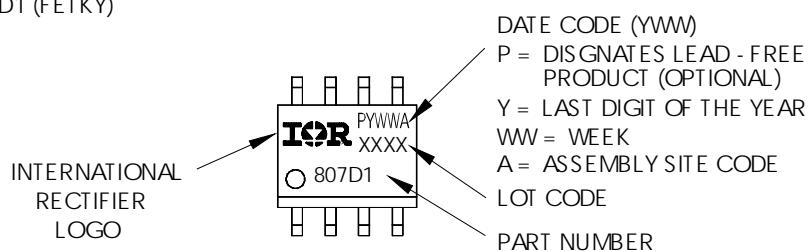


# IRF7353D1PbF

International  
**IR** Rectifier


## SO-8 (Fetky) Tape and Reel

Dimensions are shown in millimeters (inches)

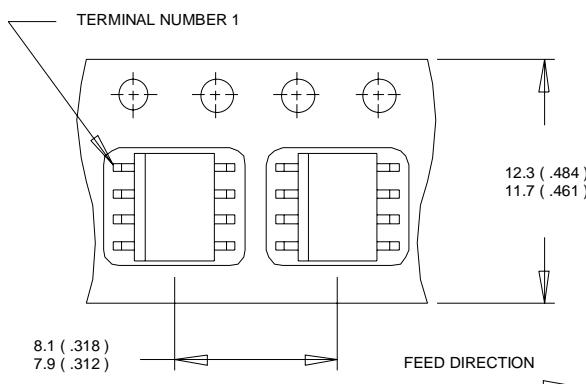

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

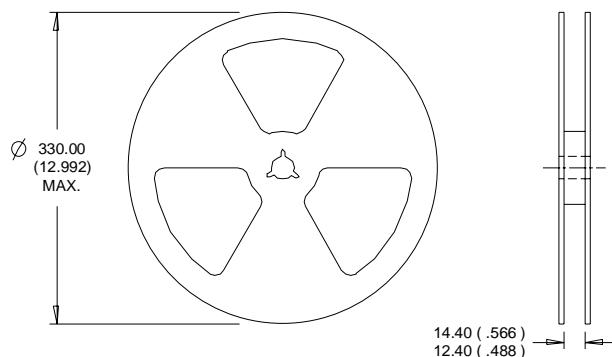

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 10/04

[www.irf.com](http://www.irf.com)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for MOSFET category:*

*Click to view products by Infineon manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [D2003UK](#) [705463DB](#) [MCH6422-TL-E](#) [FW231A-TL-E](#) [APT5010JFLL](#) [NTNS3A92PZT5G](#) [IRF100S201](#) [JANTX2N5237](#)  
[2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FQD4P40TM\\_AM002](#) [FSS804-TL-E](#) [FW217A-TL-2W](#)  
[APT10050JVFR](#) [2SJ277-DL-E](#) [2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D1014UK](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#)  
[IRF3710](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#)  
[IPS70R2K0CEAKMA1](#) [APT8015JVFR](#) [APT50M85JVR](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [NTE6400](#) [NVC3S5A51PLZT1G](#)  
[JANTX2N6796U](#) [JANTX2N6784U](#)