


order number: J00026A4003

MFP8-4x90 T568B Cat.6_A, AWG26/1-24/1, AWG27/7-24/7

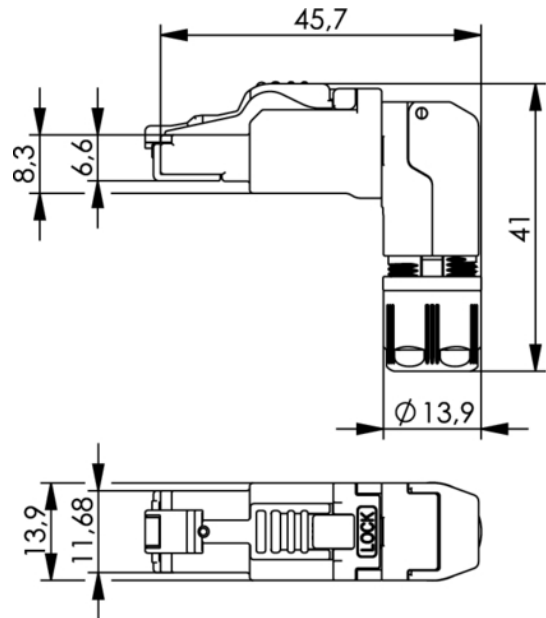

Technical Attributes	
Short name	MFP8-4x90 T568B Cat.6 _A
Remarks	AWG 26/1-24/1, AWG 27/7-24/7, incl. pre-assembled protection cap

Performance Characteristics

- Cable entry from 4 directions (4x90)
- Category 6A acc. to ISO/IEC 11801
- Plug: IEC 60603-7-51 compliant
- Life: ≥ 750 mating cycles
- Contact finish material: Ni1,2Au0,8
- Shielding housing material: die-cast nickel-plated zinc
- Cu conductor diameter:(J00026A4000, -1, -2, -4110, -4111, -4112)solid 0.51 – 0.64 mm (AWG24/1 – 22/1)stranded 0.46 – 0.76 mm (AWG27/7 – 22/7)stranded 0.61 – 0.78 mm (AWG24/19 – 22/19)* ; core diameter: 1.0 – 1.6 mm
- Outer diameter: 5.5 – 10.0 mm

- Reusable IDC: ≤ 4 cycles
- Temperature range: -40°C to 85°C
- PoE+ acc to IEEE 802.3at
- IP20
- Cable strain relief: AF13

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) *category:*

Click to view products by [TELEGARTNER](#) *manufacturer:*

Other Similar products are found below :

[RJE231881317T](#) [MP1010RX-1000](#) [MP44RX-1000](#) [GAX-3-66](#) [GAX-8-62](#) [93606-0253](#) [GD-A-44](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#)
[GDLX-A-66](#) [GDLX-A-88](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-N-44M](#)
[GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-SMT2-N-1010](#) [GMX-SMT2-N-64-50](#) [GMX-SMT2-S6-88](#) [GMX-SMT4-N-88](#) [GPX-2-64](#)
[GRT1-BT1-5](#) [GSGX-N-2-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-30](#) [GSX-NS-88-3.05-50](#) [GSX-NS-88-3.68](#) [1-1775629-2](#)
[GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [1300500326](#) [1300500227](#) [1300530003](#) [1300570002](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#)
[1400000](#) [1413176](#) [1413235](#) [MP88X-1000](#)